Plastic bucket for adjustable floor box of 2 elements for installation on pavement floor Simon 500 Cima

REF. **52052101-035**



BASIC INFORMATION

DESCRIPTION

The kit for shallow floor box of the series Simon 500 consists of 6 elements with 2 double Schuko plug and 2 plates for 1 RJ45 in a versatile grey colour. Its design for shallow floors allows it to be installed both in raised floor and concrete. If not installing the same floor lining of, this piece can be combined with the flush-mount trim cover. It measures 300x69 mm and it is manufactured with metal components with self-extinguishing, halogen-free thermoplastic insulation to ensure no flame propagation in case of fire and the low toxicity in case of smoke. It is fully compatible with elements up to 250 Volt voltage and 16 Ampere current and also allows the insertion by cutting (1 click ®. The constant effort of Simon by always offer the products most new and safe is materialize in its collection Simon 500 Cima, thanks to the fact that manages to assemble all types of mechanisms to convert homes of its customers in sites safer.

FINISH

Grey

MATERIAL

Plastic

PACKAGING CONTENTS

Tray and protective cover with installation manual

ETIM CLASS

EC000114

REMARKS

To complete the installation of the product, it must be combined with a concrete floor box for 2 elements in a grey (ref.52050001-035) or graphite finish (ref.52050001-038).

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)

+90 ºC

HEAT RESISTANCE (ºC)

+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION

08

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

IP RATING

IP4X

KIT AVAILABILITY

No

TEMPERATURE RANGE DURING INSTALLATION (ºC)

-5 to 60 ºC

NUMBER OF MODULES

2 modules

RECESS DIMENSION (MM)

220 x 172,2 mm

NUMBER OF SIDE ENTRANCES

4

VERSION

2 elements

INSTALLATION AND MAINTENANCE

NUMBER OF CHANNEL ENTRIES

2

EXTINGUISHING (ºC)

+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING

Using screws

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Specially designed for installation in concrete floors

SCREWS REQUIRED FOR SLAB FIXING

Minimum 2 (1 per side, diagonally). It is recommended to fix the bowl with 4 screws for complete fixation.

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053101711

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.765

PRODUCT NET WEIGHT
0.765

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101711

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
200

PACKAGING LENGTH
230

PACKAGING MEASUREMENT UNIT
MMT

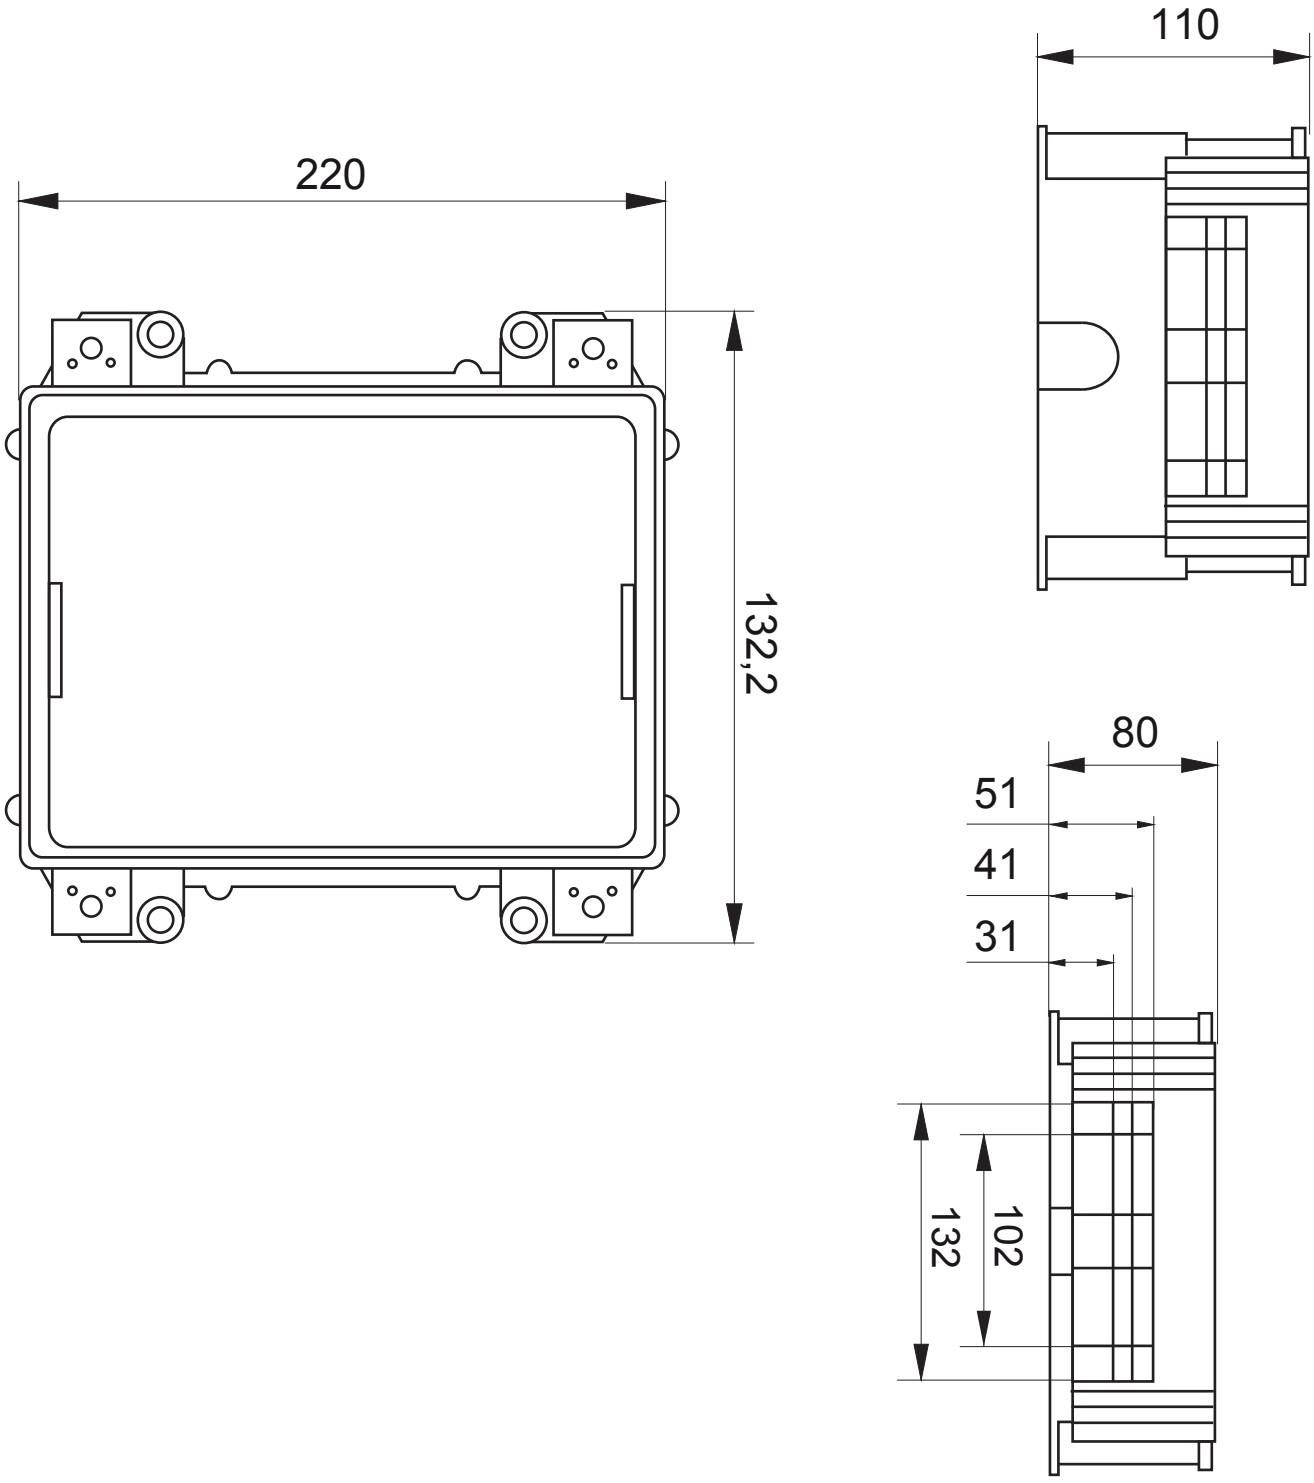
PACKAGING VOLUME
3.45

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.765

PACKAGING WEIGHT UNIT
KGM


110
220
132,2
80
51
41
31
132
102