
Voice and data angled plate with dust cover for 1 element and 1 RJ45 connector category 5e UTP aluminium Simon K45

REF. **K8095U/8**

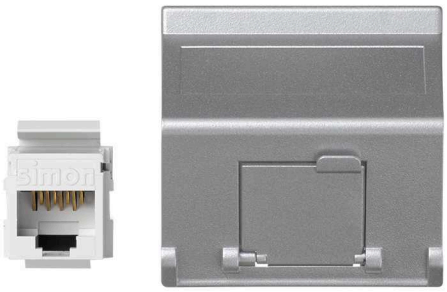

BASIC INFORMATION

DESCRIPTION

Angled plate of voice and data with dust shutter of 1 element and 1 RJ45 connector of category 5e UTP finished in aluminium. The product measures 45x45 mm and has a depth of 46.5 mm It is in compliance with the regulation that regulates this type of mechanisms, it consists of metal parts with halogen-free thermoplastic insulation and character self-extinguishing that prevents is extend the flame in case of fire. The voice and data plate is suitable for surface and flush mounting and allows its integration in vertical enclosures. In this case, it would be necessary to use the 90º positioner (reference K66) so that the plate is maintained aimed vertically. This mechanism is included in the Simon 27 series, a collection that makes a firm commitment to the total workplace solutions. It is more, all the plates of the series are compatible with any connector on the market.

FINISH

Aluminium

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Angled voice and data plate with dust cover, direct module for snap-fit connector, RJ45 category 5e UTP connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-26 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
Category 5e UTP

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

PLATE TYPE
Angled

RJ45 ADAPTOR MODULE
Supplied with the voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.026

PRODUCT NET WEIGHT
0.026

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436046306

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
95

PACKAGING WIDTH
155

PACKAGING LENGTH
195

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
2871375

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.26

PACKAGING NET WEIGHT
0.26

PACKAGING WEIGHT UNIT
KGM