


## Simon iO electronic 2-way switch with slender rocker matt white Simon 270

REF. 21001201-190

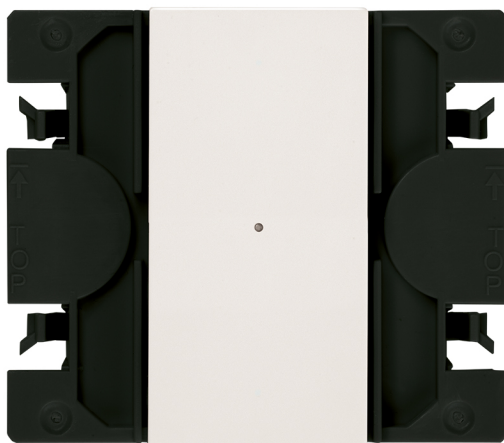

## BASIC INFORMATION

### DESCRIPTION

A space is as alive as the people who live in it. Make your home connected and create your favorite lighting moods for every moment of the day with Simon 270 iO connected switches. With the 270 iO switch, remotely control your home lighting and choose whether you want light indication with the luminous pilot. Gain comfort and energy savings simply by connecting the switch to your home Wi-Fi. By adding a neutral wire to the conventional switch's cable outlet, you can upgrade to the 270 iO switch and enjoy the benefits of a Smart Home. All with a simple change to your installation—no need for bus wiring or home automation panels. You can also install up to 20 devices without a HUB and link them to your voice assistants like Hey Google or Amazon Alexa to manage lighting with voice commands. Expand features with the HUB to enhance your experience with sensors and time-based programming. Visit Simon's Casa de la Luz in Madrid or Barcelona and get inspired by all the possibilities. Start building your Smart Home today. Up to 9 available finish colors: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminum; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

### FINISH

Matt white

### COMPATIBILITY

Simon 270 frames

### MATERIAL

Thermoplastic

### ETIM CLASS

EC001590

### REMARKS

Requires neutral wiring. Supports LED load up to 500W 230VAC 50Hz. To complete the product installation, a multiple support frame and a cover frame from the 270 series are required. Available in various finishes. It is recommended to choose a frame in the same color as the selected inner part to create a monochrome set.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### NUMBER OF SWITCHES

1

### POWER SUPPLY (V~)

230 V~

### FREQUENCY

50 - 60 Hz

### IP RATING

IP20

### RAL

9003

### INDICATOR FUNCTION

Yes

### MAINTENANCE

Clean with a soft cloth and soapy water. Do not use abrasive cloths and/or cleaners containing chlorine.

### VOLTAGE (V~)

127/230 V~

### CURRENT (A)

10 AX

## INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY  
(MM)

7

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Screw

## REGULATIONS

### REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | Dir. 2014/53/UE RED | EN 50428:2005 | EN 50428:2005 A1:2007 | EN 50428:2005 A2:2009 | EN IEC 63000:2018 | ETSI EN 300328 V2.2.2

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053315620

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053315620

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0.075

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

55

PACKAGING NET WEIGHT

0.075

UNITARY PACKAGING GROSS  
WEIGHT

0.075

PACKAGING LENGTH


55

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.075

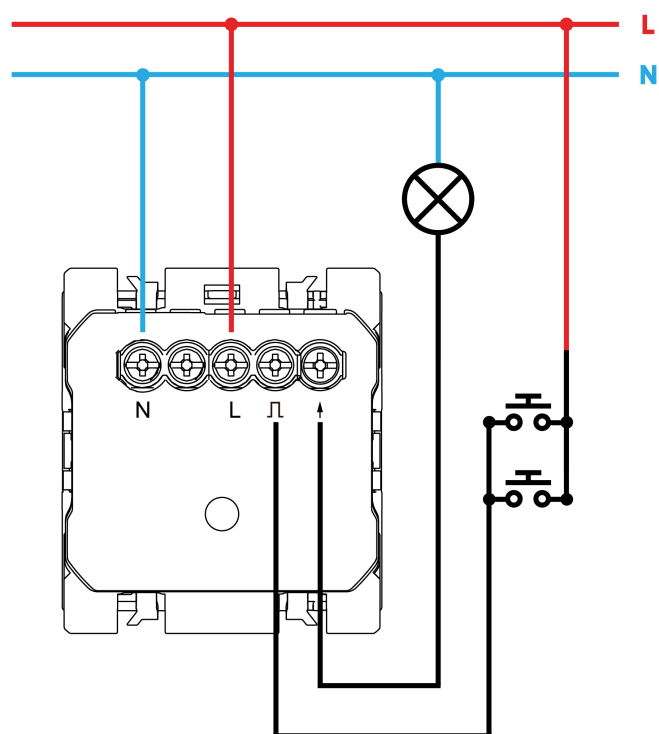

Para información más detallada consultar la hoja de instrucciones  
For more detailed information check the instruction sheet