LANE 1600 linear luminaire DALI HO Surface-mounted 2700 K Double Asymmetric White

REF. **91301307-200**

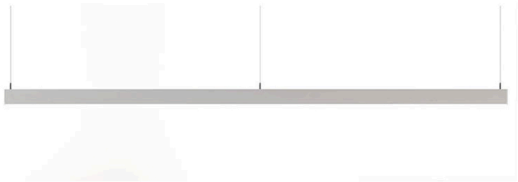

BASIC INFORMATION

BODY MATERIAL
Aluminium

PACKAGING CONTENTS
1 Unit

APPLICATION
Domestic,Office,Retail,Contract

ETIM CLASS
EC001743

simon

TECHNICAL INFORMATION

FREQUENCY (HZ)
50 - 60 Hz

IP RATING
IP20

OPERATING TEMPERATURE RANGE (ºC)
0 - 35 ºC

POWER SUPPLY (V~)
220/240 V~

RAL
9016

COLOR TEMPERATURE (K)
2700 K

CONTROL
DALI

CRI
90

CHROMATICS CRI ICONS

CRI
90

DIRECTIONAL
No

DRIVER INCLUDED
Yes

ELECTRICAL CLASS
I

ENERGY EFFICIENCY
A+

L70 (ºC)
100000h at 25ºC

L90 (ºC)
30000h at 25ºC

LIGHT BEAM APERTURE ANGLE (°)
110º

COLOR TYPE
WW

LIGHTING EFFICIENCY (LM/W)
hasta 97 lm/W

LUMENS (LM)
3765 lm

NUMBER OF LUMINAIRES
1

MACADAM STEPS
<3 Step MacAdam

OPTICS
Double Asymmetric 110º

POWER FACTOR (Φ)
>0,9

POWER (W)
50 W

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE
Surface-mounted/Suspended

REGULATIONS

EAC MARKED
No

ECORRAE MARKED
Yes

WARRANTY
5 years

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0

PRODUCT NET WEIGHT
3.5

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8436547042500

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
80

PACKAGING WIDTH
84

PACKAGING LENGTH
2400

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
16128000

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
3.85

PACKAGING NET WEIGHT
3.5

PACKAGING WEIGHT UNIT
KGM