Thermostat gloss black Simon 100

REF. **10000810-138**



BASIC INFORMATION

FINISH
Gloss black

PACKAGING CONTENTS
Mechanism and instructions

ETIM CLASS
EC003263

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

CURRENT (A)
5 A

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Touch

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

POWER SUPPLY (V~)
127/230 V~

STORAGE TEMPERATURE RANGE (°C)
-25 - 75 °C

INSTALLATION AND MAINTENANCE

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053201770

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.287

PRODUCT NET WEIGHT
0.287

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053201770

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
105

PACKAGING LENGTH
127

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
1000125

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0.287

PACKAGING NET WEIGHT
0.287


PACKAGING WEIGHT UNIT
KGM



Instalación centralizada para caldera/bomba de calor
Centralized installation for boiler/heat pump

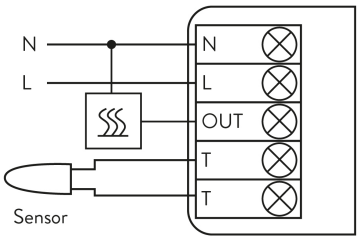

Instalación suelo radiante eléctrico
Installation with electric floor



Instalación zonificada a 230V con contacto Normalmente Abierto
230V installation with Normally Open contact

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet