
Flush-mount trim cover for adjustable floor box or service cover 6 elements grey Simon 500 Cima

REF. **52053103-035**

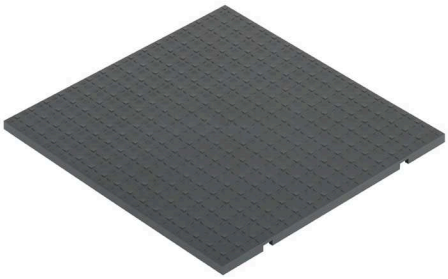

BASIC INFORMATION

DESCRIPTION

The box for 2 elements in grey colour belonging to the Simon 500 Cima series adjustable floor and for 2 elements, in addition, it is specifically designed for installation in concrete floor, although it may also be carried out in raised floor. Not be installed in the same floor lining, the piece of 132x187x76 optionally, it can be combined with the flush-mount trim cover. Also features a perfect finishes in grey, insertion by cutting (1 click ® and is compatible with elements up to 250 Volt voltage and 16 Ampere current. Also, it is made of metal components with thermoplastic insulation coated self-extinguishing halogen-free, to ensure that is no flame spread in case of fire, and a very low toxicity in the event of smoke generation. Our brand guarantees the highest quality through the perseverancia and innovation in its products, and that is that the collection Simon 500 Cima get the bond between the best mechanisms functional on the market and the maximum security.

FINISH

Grey

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
6 modules

RAL
7011

VERSION
6 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with adjustable floor boxes or service covers

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.111

PRODUCT NET WEIGHT
0.111

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101520

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
170

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
3.217

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.11

PACKAGING WEIGHT UNIT
KGM

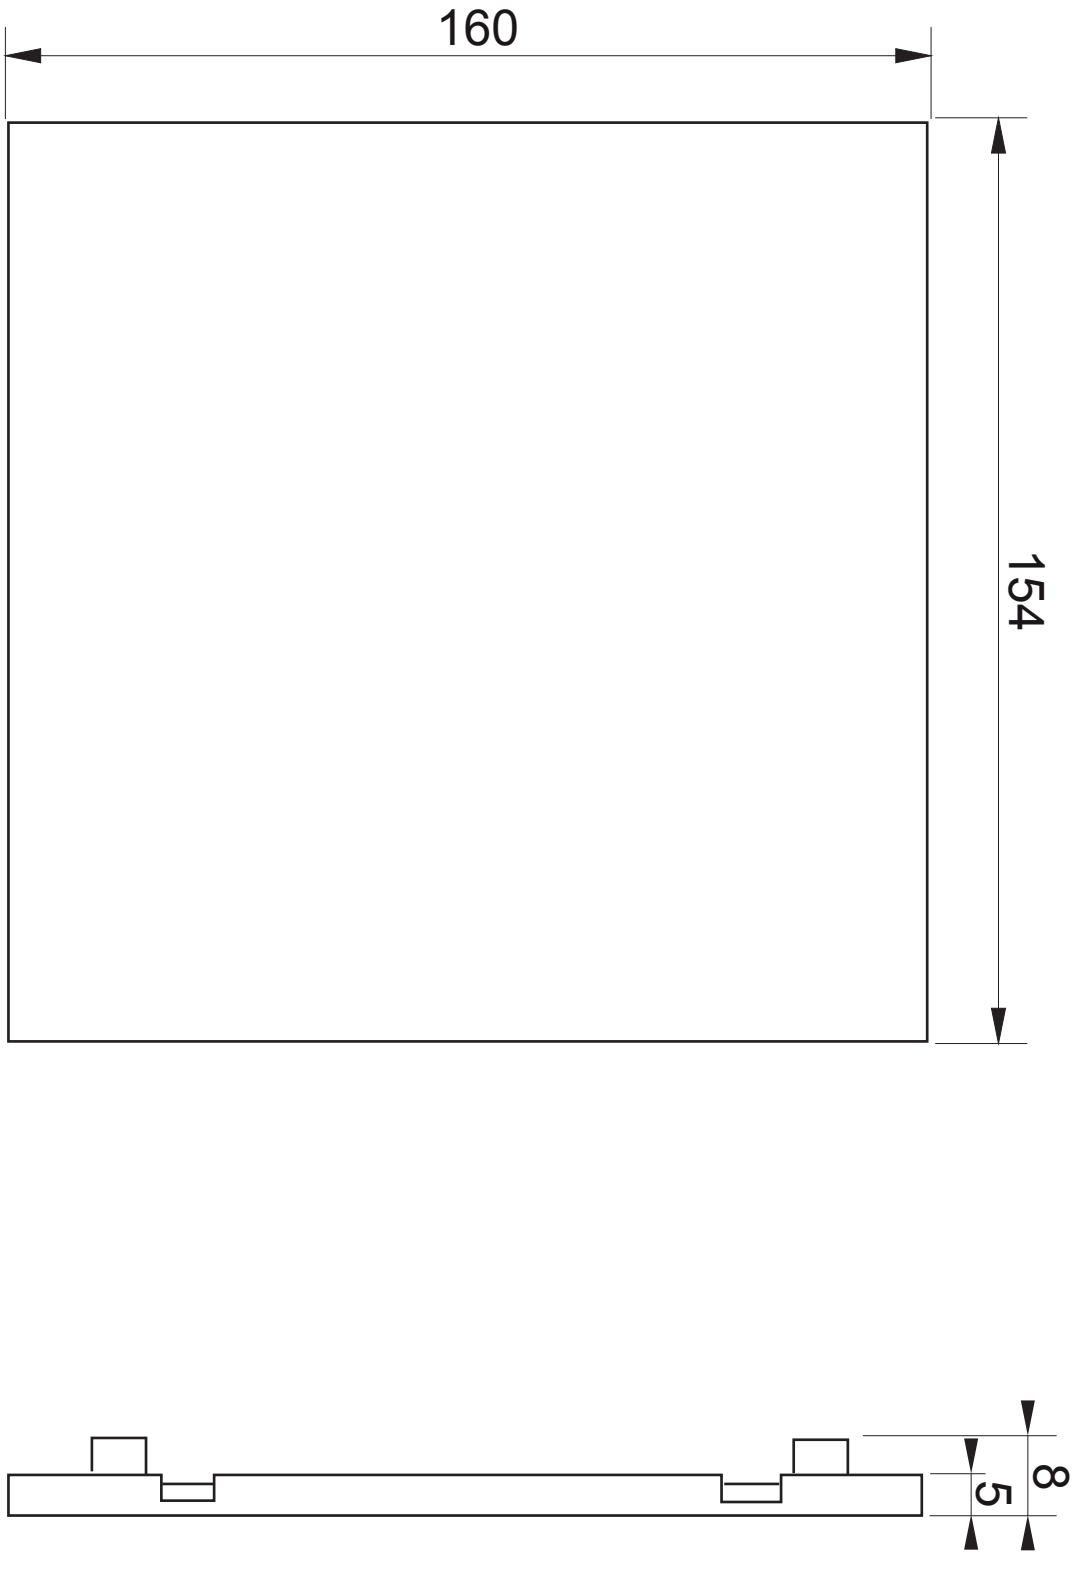
160
154
8
5