
Voice and data angled plate with dust cover for 1 element and 1 RJ45 connector category 6 FTP black Simon K45

REF. **K8096F/14**

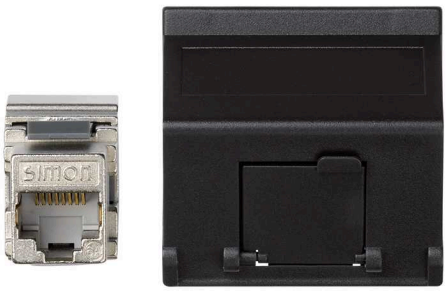

BASIC INFORMATION

DESCRIPTION

Take the maximum performance to the workplace solutions of their room with the plate for voice and data tilted plate with dust cover with 1 element and RJ45 connector category 6 FTP of the collection Simon K45, with finishes in black. Compatible with Keystone and cabling ports 22-24 AWG, its installation can be carried out on the surface-mounted or flush-mounted, without the need for screws to be direct snap-fit. Manufactured in self-extinguishing halogen-free thermoplastic, guarantees its security against fire and can reach temperatures of installation, ranging from -5 and 60 ° C Can be combined with the 90º positioner for voice and data plates that are installed in K45 Teleblock, columns or channels mechanism-holders, in the case of the need for installation in vertical. The elegance of black, compatible with all types of connections, and the guarantee of innovation and security, make the range Simon K45 voice and data plates on the option, perfect to make the most of your workplace solutions.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Voice and data tilted plate with dust cover, direct module for snap-fit connector, RJ45 category 6 FTP connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-24 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
Category 6 FTP

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+60º C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60º C

NUMBER OF MODULES
Half

PLATE TYPE
Angled

RAL
7021

RJ45 ADAPTOR MODULE
Supplied with the voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

287138

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.026

PRODUCT NET WEIGHT

0.026

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8426436042438

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

95

PACKAGING WIDTH

155

PACKAGING LENGTH

195

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2871375

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.26

PACKAGING NET WEIGHT

0.26

PACKAGING WEIGHT UNIT

KGM