


Digital control with intercom and display for 2-trunking sound centre

REF. 05252-39

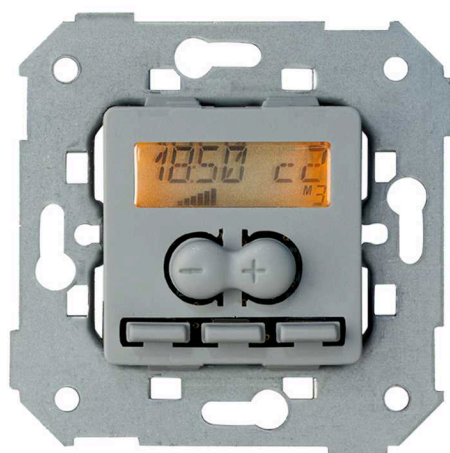

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature and Simon 82
frames

PACKAGING CONTENTS

Control and instruction sheet

ETIM CLASS

EC002484

REMARKS

Possibility of increasing the number of controls and speakers using amplifier 05070-39

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 0,25 to 0,75 mm

NUMBER OF CONTACTS

15

DISCONNECTION TIMER

15, 30, 45, 60, 75 and 90 minutes

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

INTERCOMMUNICATION FUNCTION

Yes

IP RATING

IP20

TYPE OF MECHANISM

Push

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

OUTPUT IMPEDANCE (OHMS)

8 Ohms

OUTPUT POWER (W)

1.5 + 1.5 W

POWER SUPPLY (V~)

12 Vdc

REAR INPUT VIA TERMINALS

Yes

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

NUMBER OF WIRES

15

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

CLAW

Not possible

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

UNE-EN 60065:2003 + UNE-EN 55013:2002 + A1:2004 + UNE-EN 61000-3-2:2006 + UNE-EN 55022:2000 + UNE-EN 61000-4-3:2003 + A1:2004 + UNE-EN 61000-4-4:2005 + UNE-EN 61000-4-11:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.11

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

384000

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053059180

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.11

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

60

PACKAGING NET WEIGHT

0.11

UNITARY PACKAGING GROSS

WEIGHT

0.11

PACKAGING WIDTH

80

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

80