


SLIM SYSTEM modular luminaire 4000K Symmetrical op 1.2 m OBD White

REF. 91771605-400

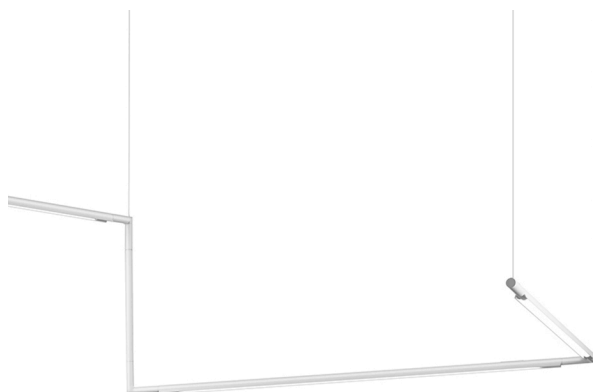

BASIC INFORMATION

FINISH

White

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

1465x85x85 mm

BODY MATERIAL

Aluminium

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001743

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

POWER SUPPLY (V~)

48 Vdc

RAL

9016

COLOR TEMPERATURE (K)

4000 K

CONTROL

On Board Dimmer

CRI

90

DIRECTIONAL

Yes

DRIVER INCLUDED

No

ELECTRICAL CLASS

III

ENERGY EFFICIENCY

A+

COLOR TYPE

CW

LIGHTING EFFICIENCY (LM/W)

Up to 82 lm/W

LUMENS (LM)

3460 lm

NUMBER OF LUMINAIRES

1

MACADAM STEPS

<3 Step MacAdam

OPTICS

Symmetric

POWER (W)

42 W

CHROMATICS CRI ICONS

CRI
90

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Suspended

REGULATIONS

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547050345

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

10.584

UNITARY PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING GROSS WEIGHT

0.72

PRODUCT NET WEIGHT

0.6

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547050345

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

85

PACKAGING WIDTH

85

PACKAGING LENGTH

1465

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

10584625

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.72

PACKAGING NET WEIGHT

0.6

PACKAGING WEIGHT UNIT

KGM