


Group of 2 push buttons 10 A 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. 75393-39

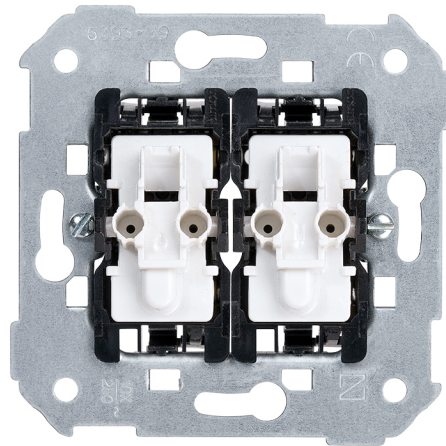

BASIC INFORMATION

DESCRIPTION

Group of 2 push buttons with built-in light indicator and quick terminal connection system. For 10A and 250V.

It belongs to the control mechanism category of the Simon 75 series and is suitable for both flush-mounted and surface installation.

Note that the cable section it accommodates is from 1.5 mm to 2.5 mm and the required cable stripping for successful connection is 15 mm.

The consumption of the light indicator is 1 mA. These mechanisms can also be mounted on the Simon 82 series.

The Simon 75 Collection offers numerous functions that provide comfort and safety, while also offering a wide range of options to conveniently equip each space. Different colors in the same frame create numerous possibilities to form the ideal set that best meets the various needs of each installation.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82
Detail, Simon 82 Nature, Simon
82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

10 A

RECESS DIMENSION (MM)

30

CONSUMPTION INDICATOR (mA)

1 mA

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF CONTACTS

4

LINKABLE

No

VERSION

Double

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

FREQUENCY

50 Hz

MONOBLOCK

No

NUMBER OF WIRES

4

NOMINAL VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

REMOVAL OF COVER

Only with tool

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255988

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.073

PRODUCT NET WEIGHT

0.073

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053036617

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.725

PACKAGING NET WEIGHT

0.73

PACKAGING WEIGHT UNIT

KGM

