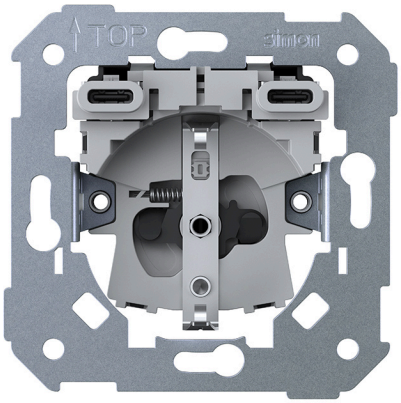
Schuko socket base with double USB C + C charger 20W Simon 75

REF. **7541432-039**



BASIC INFORMATION

DESCRIPTION

Schuko socket base with built-in double USB type C+C charger, ideal for combining power socket and fast charging of electronic devices in a single mechanism. This schuko socket with USB C allows you to power electrical equipment and directly charge smartphones, tablets, and devices compatible with Power Delivery (PD) without the need for additional adapters. It incorporates a schuko socket 16 A 250 V~ 50-60 Hz and two USB type C ports with output 5, 9, 12, 15, and 20 Vdc, offering optimized charging according to the profile of the connected device. Perfect solution as a flush-mounted socket with USB charger in residences, offices, hotels, and commercial spaces where modern and functional charging points are required. Connection system via terminal connection to screw, allowing conductor cross-section from 1.5 to 2.5 mm^2. Mechanism is flush-mounted in a universal box occupying 1 double element, suitable for surface or flush installation in a horizontal position. Protection rating IP20 and dielectric strength 3750 Vac. Operating temperature range from 0 to 35 °C. Aesthetically and mechanically compatible with the Simon 75 series and compatible frames, allowing integration of a USB type C socket of professional design in any electrical project.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

ETIM CLASS

EC000125

REMARKS

The mechanism includes the child protection function.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS
2

CONNECTOR TYPE
Schuko,USB C

NUMBER OF CONTACTS
3

FORMAT
Schuko,USB C

FREQUENCY
50 - 60 Hz

INDICATOR FUNCTION
No

CURRENT (A)
16 A

IP RATING
IP20

LINKABLE
Yes

MAXIMUM POWER (W)
4000

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
230 V~

PLATE TYPE
Flat

RECESS DIMENSION (MM)
45

USB CHARACTERISTICS
2 USB = 5,0 VDC 3,0 A 15,0 W ; 1 USB = 5,0 VDC 3,0 A 15,0 W / 9,0 VDC 2,2 A 19,8 W / 12,0 VDC 1,7 A 20,4 W

USB CURRENT (A)
1,6 A

USB PORT TYPE
C

POWER DELIVERY USB
Yes

QUICK CHARGE USB
Yes

USB VOLTAGE (V~)
5/12 V~

VOLTAGE (V~)
230 V~

NUMBER OF WIRES
3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
10

CLAW
Simon 75

REMOVAL OF COVER
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

TYPE OF TERMINAL CONNECTION - FUNCTION 2
Schuko/USB: Screw

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053438824

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.1

PRODUCT NET WEIGHT
0.08

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053438824

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT

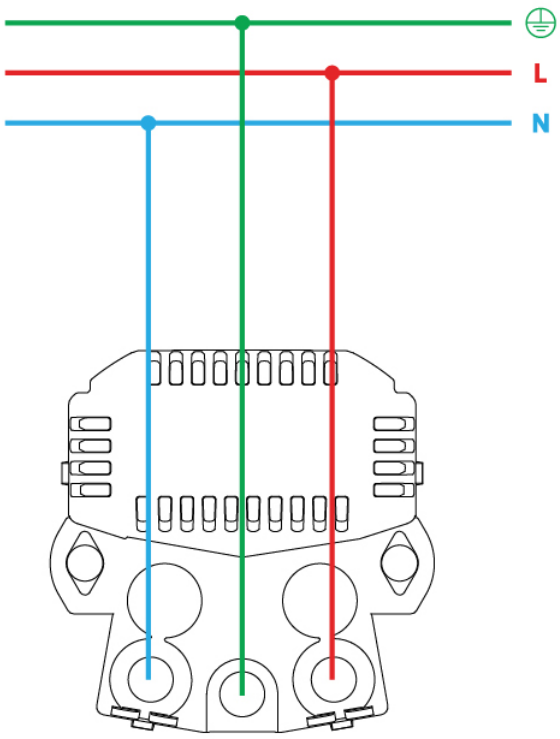
PACKAGING VOLUME
329232

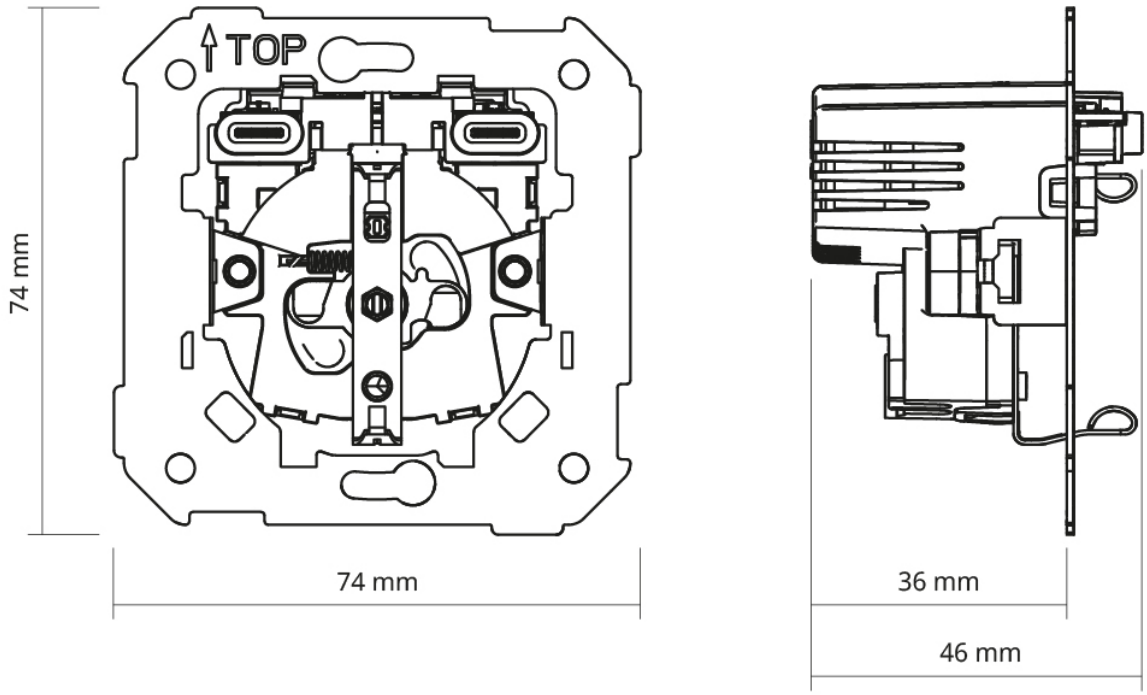
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.104

PACKAGING NET WEIGHT
0.08

PACKAGING WEIGHT UNIT
KGM


L
N


TOP
74 mm
74 mm
36 mm
46 mm