


2-way switch 10AX 250V~ with built-in pilot light and fast terminal connection system

REF. 75202-39

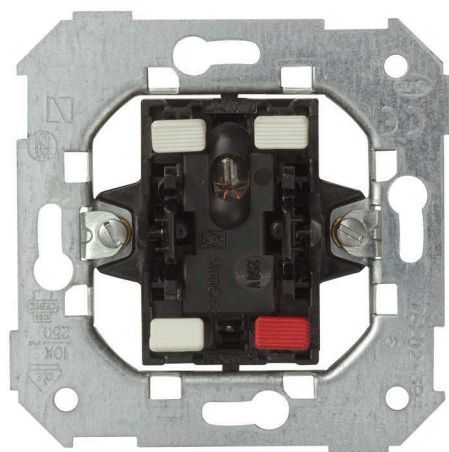

BASIC INFORMATION

DESCRIPTION

2-way switch 10AX 250V~ with built-in light and quick terminal connection system. This article corresponds to the Simon 75 series, a collection suitable for all types of decorative spaces thanks to the versatility of its mechanisms. With rocker operation, this 2-way switch is suitable for surface or flush mounting installation, it consists of metal components with insulation in halogen-free thermoplastic material. Not in vain, the product has been manufactured in accordance with the current regulation. It has a high resistance to extreme temperatures and also against scratches. This article can be combined with the reference 31802-31. In case you need to replace the indicator light, in order to ensure optimum preservation of this piece, it is recommended to install it in environments with a temperature range between 5 and 40°C. The Simon 75 series is compatible with the Simon 77 mechanisms, a collection that allows you to connect the cables without stripping, reducing installation time.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Can be combined with article 31802-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

10 AX

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CONSUMPTION INDICATOR (mA)

1 mA

IP RATING

IP20

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

CLAW

Simon 27

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255841

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.074

PRODUCT NET WEIGHT

0.074

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003596

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.735

PACKAGING NET WEIGHT


0.74

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX




Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039




Interrupor bipolar / Double pole switch
XXXX133-XXX

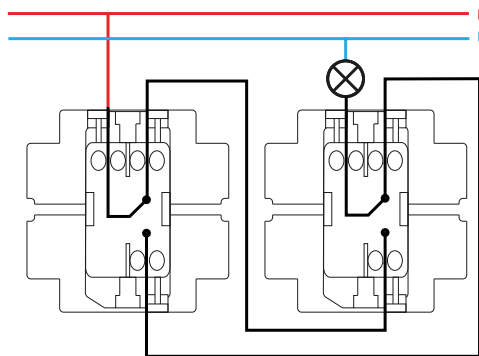


Conmutador / 2-way switch
XXXX201-XXX

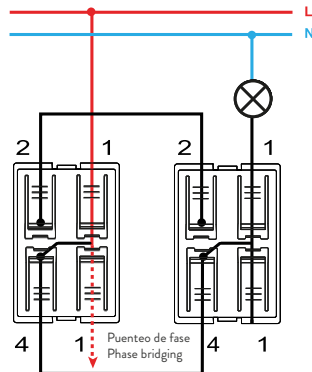


Conmutador / 2-way switch
7700201-039

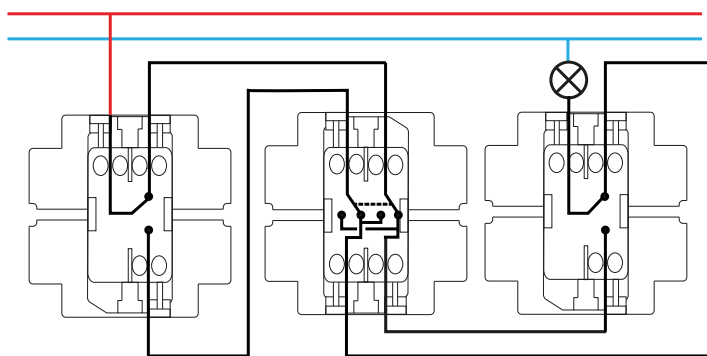


Conmutador cruce / Intermediate switch
XXXX251-XXX

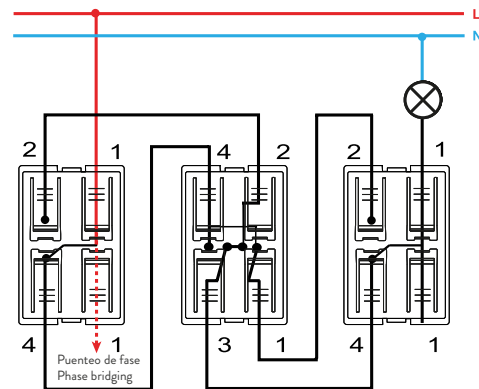


Conmutador cruce / Intermediate switch
7700251-039

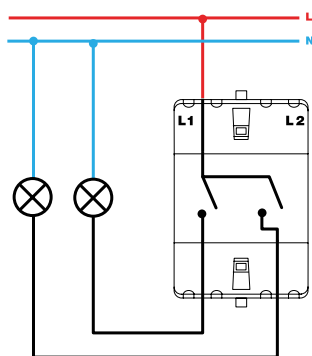


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

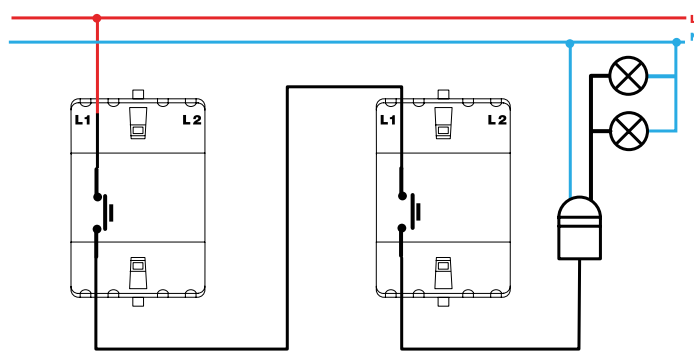


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

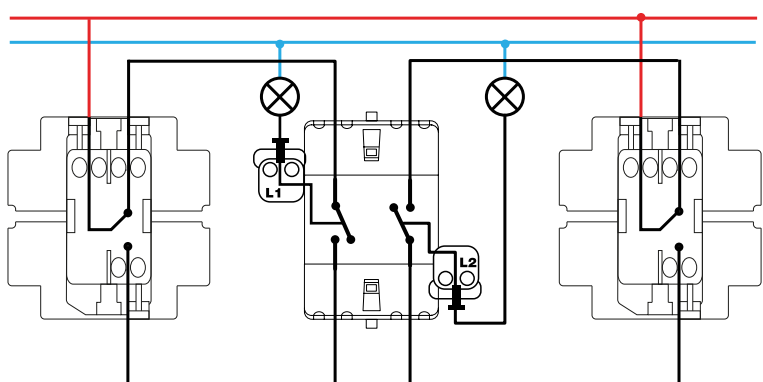


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

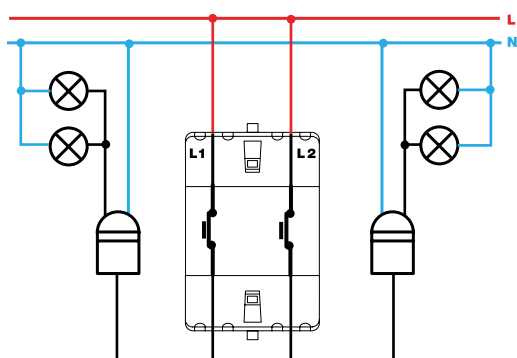


Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX

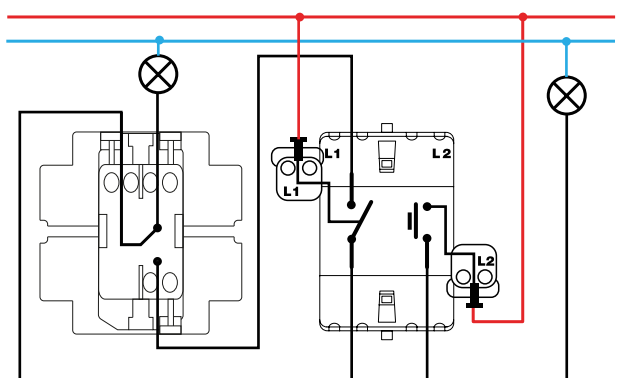


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

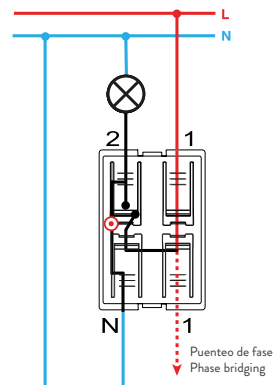


Interrupor con piloto / Push button pilot switch
7700112-039

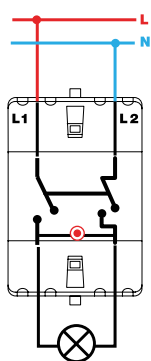


Interrupor bipolar / Double pole switch
XXXX134-XXX

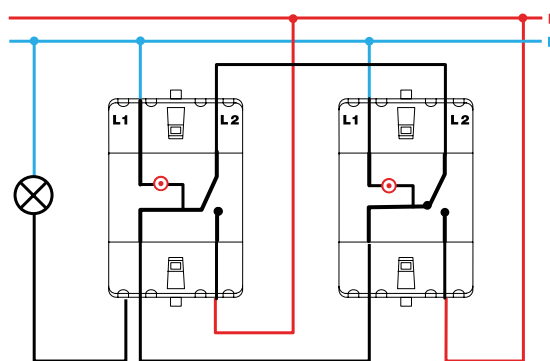


Conmutador / 2-way switch
XXXX202-XXX




Interruptor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

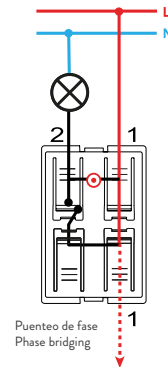

Pulsador con luminoso / Push button switch with light
7700160-039

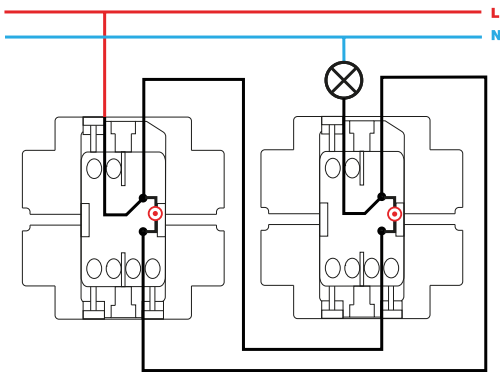

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

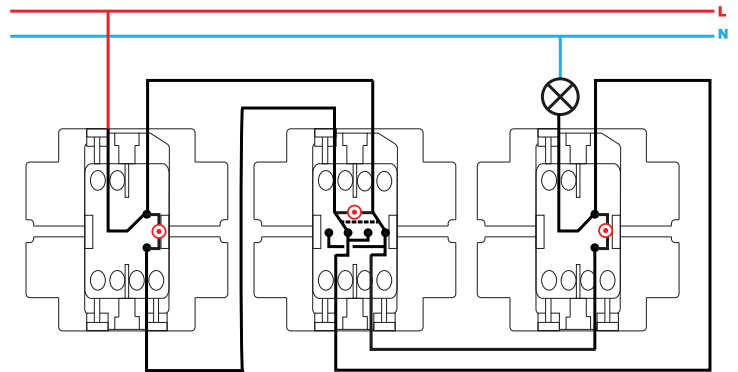

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX