


Flat voice and data plate with dust cover for 1 RJ45 Nexans® for 1 element graphite Simon 500 Cima

REF. 50018085-038

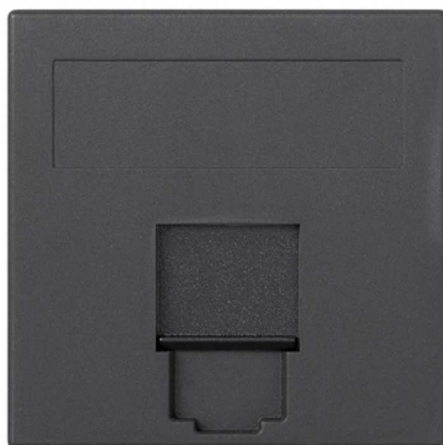

BASIC INFORMATION

DESCRIPTION

The plate of voice and data flat plate with dust cover for 1 Nexans ® RJ45 has been specially made of halogen-free thermoplastic, in order to ensure that is no flame spread in case of fire, and low toxicity in a very low of any smoke. It is part of the collection Simon 500 Cima and measures 50x50x11 and excellent finishes in graphite. Ademas, the piece includes clips for fastening in vertical and horizontal enclosures without the need of adapter. And it is that our commitment to innovation and quality you Patent in each one of our collections. Therefore, the Simon 500 Cima series offers a wide selection of the most advanced technology and safest mechanisms on the market, which bets by the best for your home.

FINISH

Graphite

PACKAGING CONTENTS

Flat voice and data plate with dust cover

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST SHUTTER

Yes

NUMBER OF MODULES

1

AVAILABLE IN

Plate for 1 and 2 RJ45

FORMAT

RJ45

PLATE TYPE

Flat

COMPATIBLE WITH CONNECTORS

Nexans® LANmark®-5 EVO, LANmark®-6 EVO.

IP RATING

IP20

RAL

7021

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Included in voice and data plate

RJ45 CONNECTORS

Not included in voice and data plate

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

RJ45 Nexans® connectors

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

SNAP-FIT TYPE

RJ45 Nexans® connectors

DUST PROTECTION

Yes

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053097021

PACKAGING VOLUME

0.604

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

54

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS WEIGHT

0.028

PACKAGING WIDTH

52

PACKAGING NET WEIGHT

0.28

PRODUCT NET WEIGHT

0.028

PACKAGING LENGTH

215

PACKAGING WEIGHT UNIT

KGM

