


Wall movement and brightness detector 180° 12m anthracite IP54 3Y

REF. 89101143-340

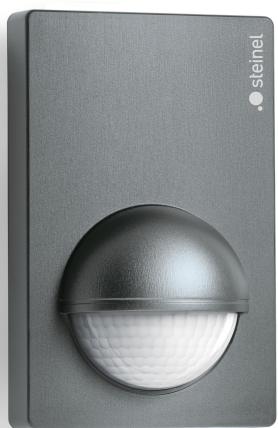

BASIC INFORMATION

DESCRIPTION

Wall-mounted PIR motion and light detector. The recommended installation height is 2 m, with a maximum height of 4 m. It has a detection angle of 180 ° and an opening angle of 90°. The tangential detection range is 12 m and the radial detection range is 3 m.

The luminosity regulation range is 2 - 2000 lux and the timing range is 10 s - 15 min. The detector configuration is done via potentiometers.

The control output is On/Off and the maximum switchable power is 1000 W (64 W LED).

The power supply voltage is 220 - 240 VAC. The operating temperature of the detector is: -20 - 50 °C.

Finish NOT APPLICABLE, protection degree IP 54 and dimensions: 77 x 120 x 55 mm.

3-year warranty.

For more product information, visit STEINEL website by clicking [here](#)

FINISH

Anthracite

COMPATIBLE WITH MECHANICAL

PUSH BUTTON

No

ETIM CLASS

EC000133

COMPATIBILITY

Simon Sensor Pro

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

MAXIMUM POWER (W)

1000

RAL

7016

IP RATING

IP54

POWER SUPPLY (V~)

220/240 V~

CONTROL

On/Off

INSTALLATION AND MAINTENANCE

MINIMUM INSTALLATION HEIGHT

1.8

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053356883

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.2

PRODUCT NET WEIGHT

0.13

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053356883

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

120

PACKAGING WIDTH

90

PACKAGING LENGTH

90

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

972000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.2

PACKAGING NET WEIGHT

0.13

PACKAGING WEIGHT UNIT

KGM