South African socket outlet 15A with screw terminal connection 2 elements graphite K45

REF. **K07/14**



BASIC INFORMATION

FINISH
Graphite

MATERIAL
Plastic

COMPATIBILITY
Simon K45 enclosures for installation on wall, floor, ceiling, and furniture and Simon 500 Cima enclosures (requires combining with the K45 to 500 Cima adapter ref. 50012088-030).

ETIM CLASS
EC000125

TECHNICAL INFORMATION

FORMAT
South African

IP RATING
IP20

RAL
7021

CURRENT (A)
15 A

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
12

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053343388

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.028

PRODUCT NET WEIGHT
0.028

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436052338

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
50

PACKAGING WIDTH
100

PACKAGING LENGTH
245

PACKAGING MEASUREMENT UNIT
MMT

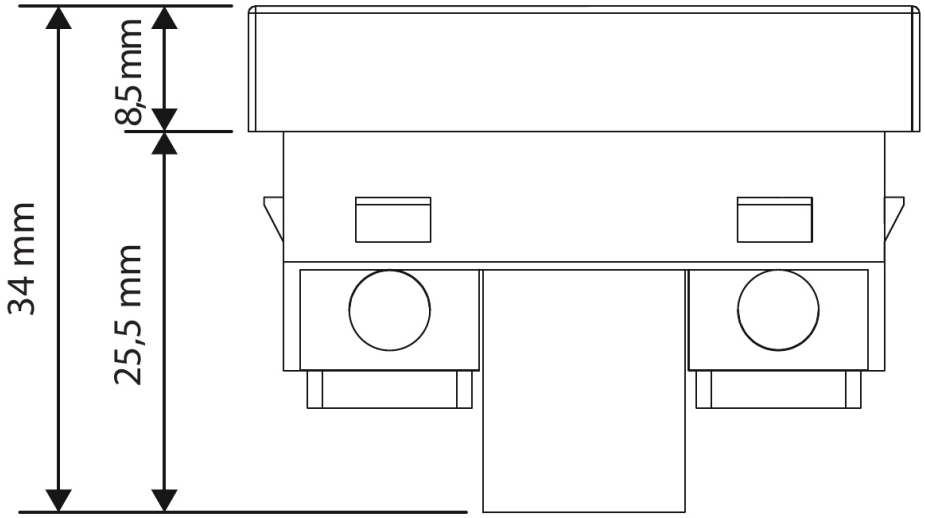
PACKAGING VOLUME
1225000

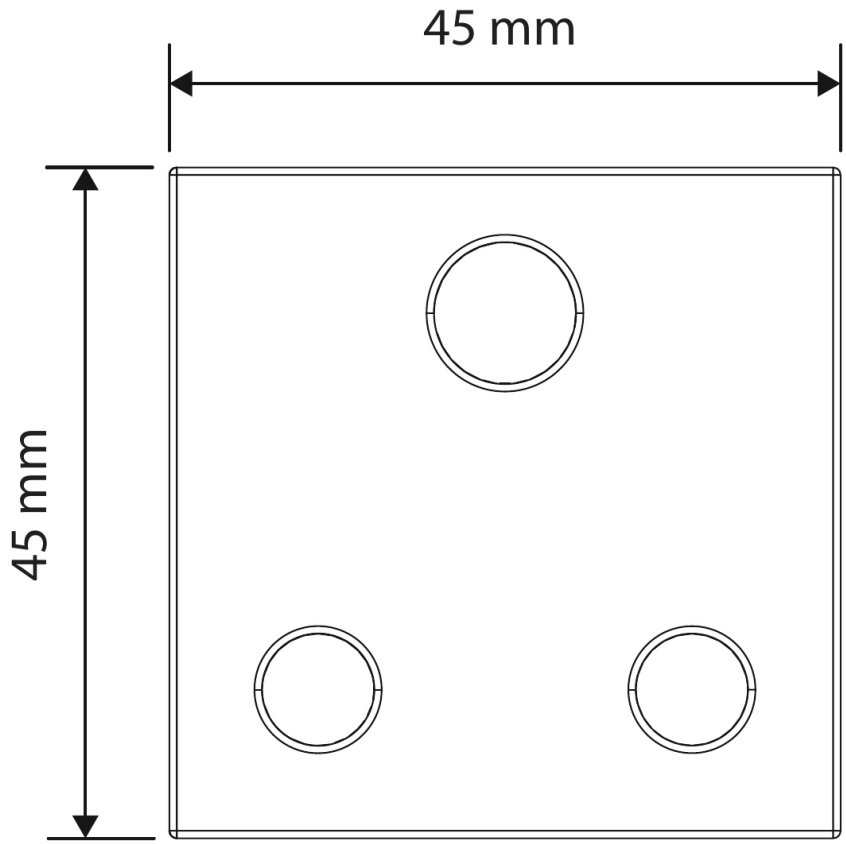
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.378

PACKAGING NET WEIGHT
0.28

PACKAGING WEIGHT UNIT
KGM


34 mm
8,5 mm
25,5 mm


45 mm
45 mm