


Trim plate for 2 quick-connection connectors with 3 poles male or female for 1 element white Simon K45

REF. KB18/9

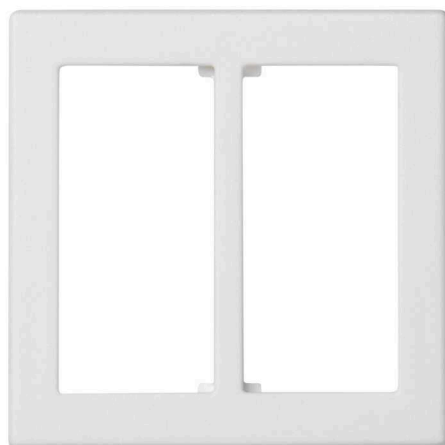

BASIC INFORMATION

DESCRIPTION

The collection Simon K45 presents its trim plate for 2 fast-connection connectors with 3 poles, in a few simple but elegant finishes in white, to choose between male or female, the piece measures 45x45x8,5 mm, a thickness of 8.5 mm and has been manufactured with thermoplastic components halogen-free, guaranteeing no flame spread in case of fire, if it had fire, and low toxicity extremely if any smoke. Whenever the clips have between 1.5 and 2 mm in thickness, you will have no problem when it comes to fix the model corrector. This is possible thanks to the fact that our plate is compatible with all major brands of fast-connection connectors. In Simon we are a leading company in the sector in terms of solutions for the home, therefore, if what you are looking for is that your home with the best solutions for workplace solutions, you can veined the collection Simon K45. A collection designed to offer the best quality and products at the forefront of technology. This comes from one of the best marks on the market.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Plate for 2 fast-connection connectors with 3 poles

ETIM CLASS

EC000011

REMARKS

Connectors not included (to be purchased separately). If using another quick connect brand, the plate is compatible with the leading manufacturers (Wieland®, Wago®, etc). To fix the connector to the plate correctly, the clips must be between 1.5 and 2 mm thick.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Versions for 1 and 2 quick-connection connectors with 3 male or female poles

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

FORMAT

GST18

INDICATOR FUNCTION

No

IP RATING

IP20

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

RAL

9003

VERSION

Double

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

REMOVAL OF THE PLATE

Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60535:2009 A1:2013

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.007

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436036734

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

45570

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.14

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.14

UNITARY PACKAGING GROSS

WEIGHT

0.007

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140