


Two-pole socket outlet 16A 250 V~ with screw terminal connection system aluminium Simon 270

REF. 20000431-093

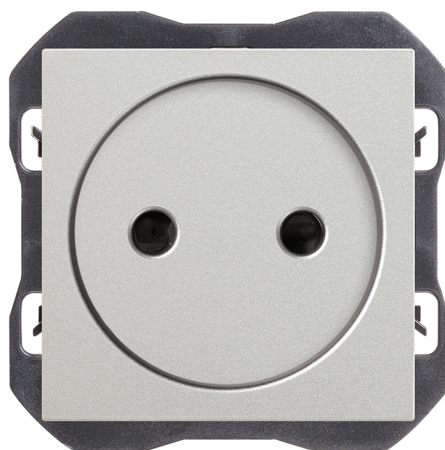

BASIC INFORMATION

FINISH

Matt aluminium

COMPATIBILITY

Simon 270 frames

MATERIAL

Thermoplastic

ETIM CLASS

EC000125

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

POWER SUPPLY (V~)

250 V~

FORMAT

Two-pole

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

9006

FREQUENCY

50 - 60 Hz

VOLTAGE (V~)

250 V~

CURRENT (A)

16 A

NOMINAL VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

14

INSTALLATION DIRECTION

Horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | IEC 60884-1 Ed 3.2 | UNE 20315-1-1:2017 | UNE 20315-1-2:2017 | DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053303085

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053302828

PACKAGING VOLUME

1818180

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

55.5

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

117

PACKAGING NET WEIGHT

0.41

UNITARY PACKAGING GROSS
WEIGHT

0.041

PACKAGING LENGTH

280

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.041

