


Intermediate switch 10AX 250V~ with built-in light and fast terminal connection system

REF. 75254-39

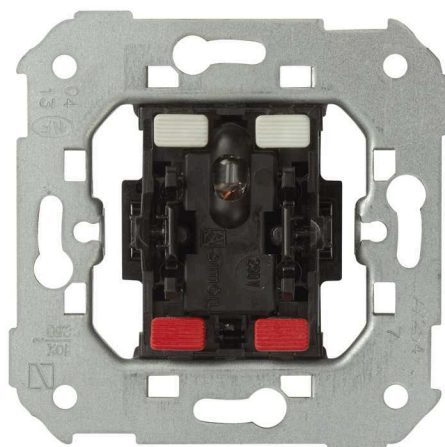

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature, Simon 82 and
Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Can be combined with article 31803-31 if replacing the light indicator.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	CURRENT (A) 10 AX	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
CONSUMPTION INDICATOR (MA) 1 mA	IP RATING IP20	VERSION Single
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast
CLAW Simon 27	INSTALLATION TYPE Suitable for surface and flush mounting	

REGULATIONS

REGULATIONS


Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION


UNITARY EAN CODE 8421053255940	UNITARY PACKAGING WEIGHT UNIT KGM	UNITS CONTAINED PACKAGING 10
UNITARY PACKAGING GROSS WEIGHT 0.064	UNITARY PACKAGING WIDTH 0	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING HEIGHT 0	PACKAGING EAN 8421053003671	PACKAGING VOLUME 3026595
UNITARY PACKAGING LENGTH 0	PACKAGING GROSS WEIGHT 0.765	PACKAGING VOLUME UNIT MMQ
PRODUCT NET WEIGHT 0.064	PACKAGING HEIGHT 83	PACKAGING WEIGHT UNIT KGM
UNITARY PACKAGING VOLUME 0	PACKAGING LENGTH 221	PACKAGING WIDTH 165
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING NET WEIGHT 0.64	

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX




Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039




Interrupor bipolar / Double pole switch
XXXX133-XXX

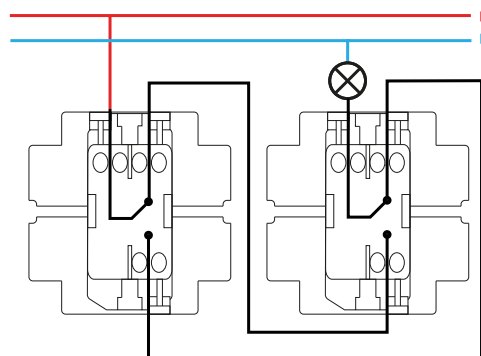


Conmutador / 2-way switch
XXXX201-XXX

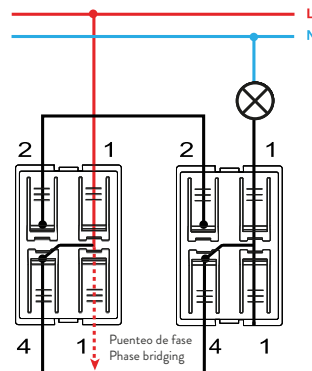


Conmutador / 2-way switch
7700201-039

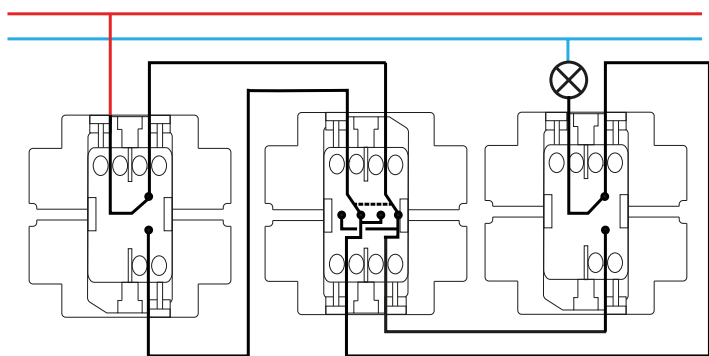


Conmutador cruce / Intermediate switch
XXXX251-XXX

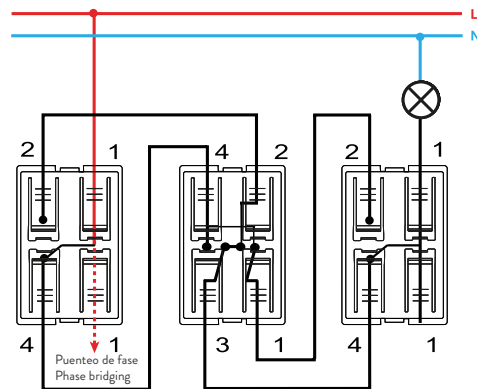


Conmutador cruce / Intermediate switch
7700251-039

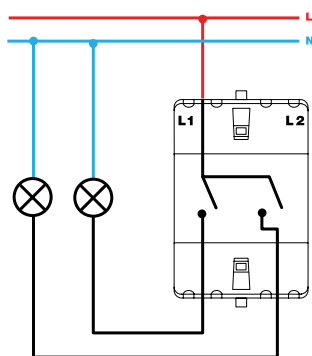


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

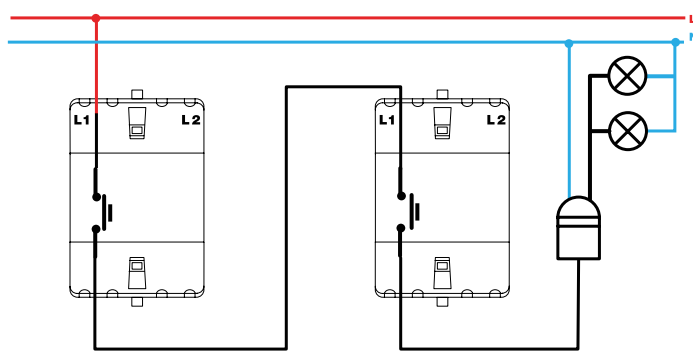


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

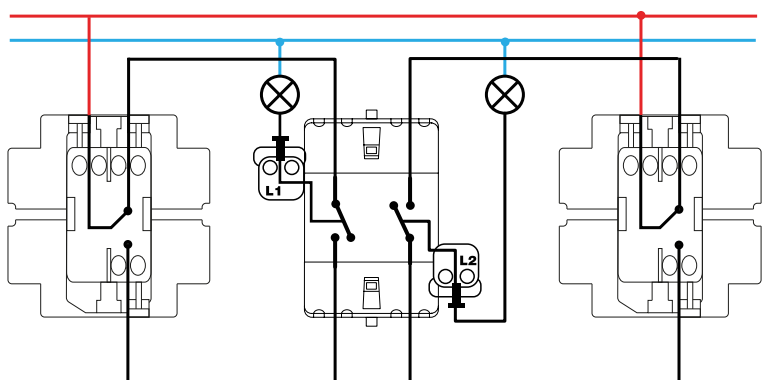


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

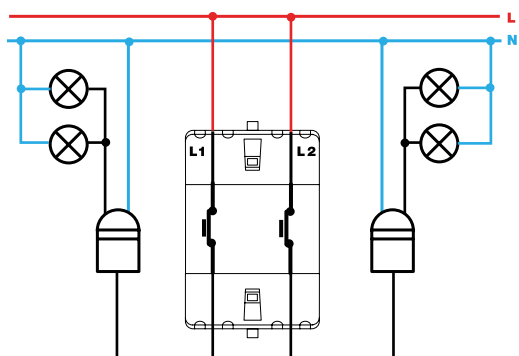


Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX

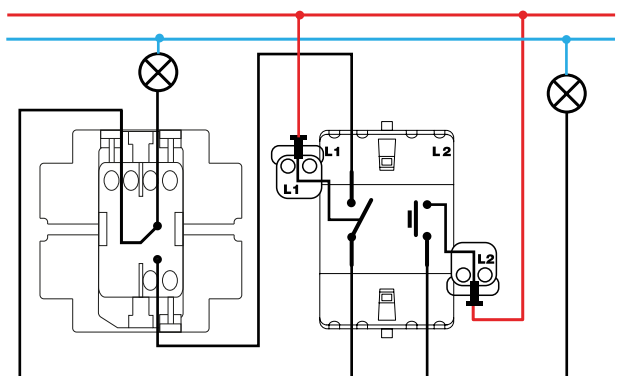


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

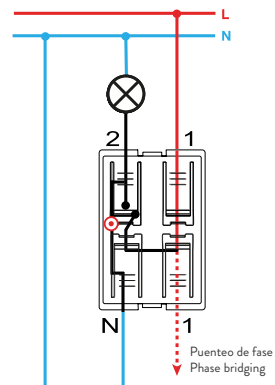


Interrupor con piloto / Push button pilot switch
7700112-039

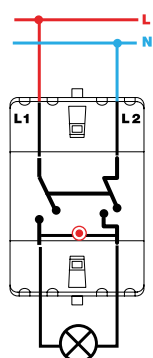


Interrupor bipolar / Double pole switch
XXXX134-XXX

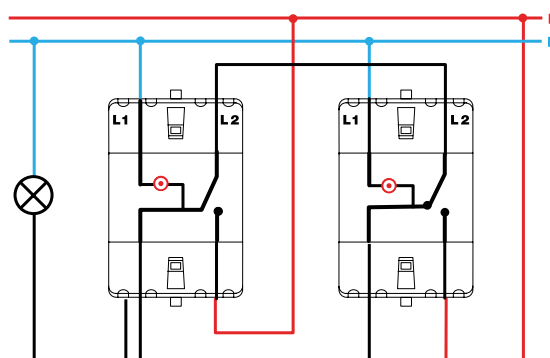


Conmutador / 2-way switch
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

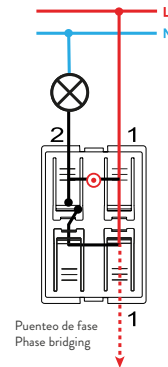

Pulsador con luminoso / Push button switch with light
7700160-039

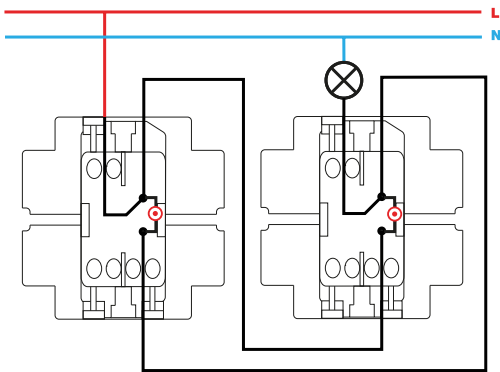

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

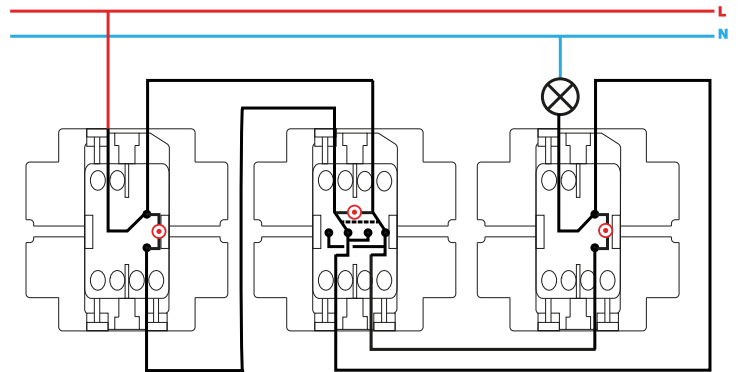

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX