


Digital control with notifications, Walkman input and headphone output for sound centre 1 trunking

REF. 05232-39

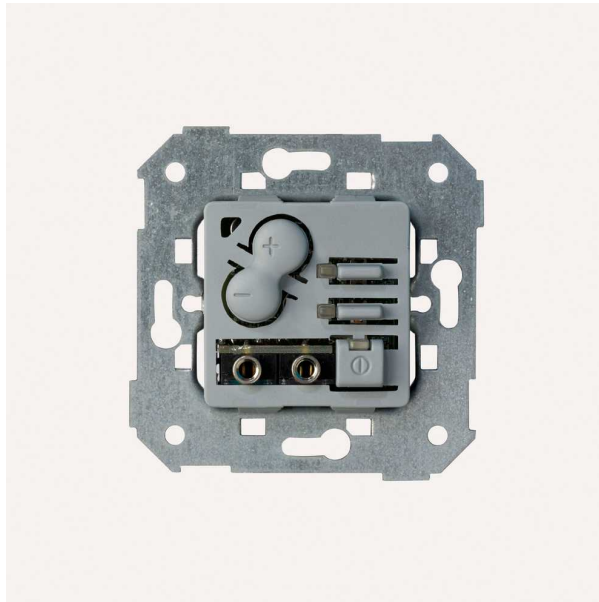

BASIC INFORMATION

DESCRIPTION

Digital commandment with notifications, input and headphones output for has for Walkman. It is ideal for sound control unit of a single trunking. It is part of the Simon 82 series. Screw terminal connection and works by pulsation. The optimum power is 12 Vdc and has a timed 20 minutes. It is possible to expand the controls and loudspeakers using the 05070-39 amplifier Simon of the series Simon 82. This is the individual version for one element and has a signalling function. It has no possibility of claw. This digital control with warnings, Simon 82, it can be installed both on surface-mounted and flush-mounted, which gives it enormously versatility. Requires a wire stripping of 7 mm and supports a wire cross-section from 0.25 to 0.75 millimetres. It is made of electronic components, asylum seekers thermoplastically and free of halogens, they support temperatures between -25 to + 50 degrees centigrade.

COMPATIBILITY

Frames Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations, Simon 28, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88

PACKAGING CONTENTS

Control and instruction sheet

ETIM CLASS

EC002484

REMARKS

Possibility of increasing the number of controls and speakers using amplifier 05070-39

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 0,25 to 0,75 mm

NUMBER OF CONTACTS

9

DISCONNECTION TIMER

20 minutes

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

INTERCOMMUNICATION FUNCTION

Yes

IP RATING

IP20

TYPE OF MECHANISM

Push

MINI JACK INPUT

Yes

MINI JACK OUTPUT

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

OUTPUT IMPEDANCE (OHMS)

8 Ohms

OUTPUT POWER (W)

1.5 + 1.5 W

POWER SUPPLY (V~)

12 Vdc

REAR INPUT VIA TERMINALS

Yes

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

NUMBER OF WIRES

9

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

CLAW

Not possible

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 55020:2007 + EN 55020:2007 A11:2011 + EN 55032:2012 + EN 60065:2002 + EN 60065:2002 A1:2006 + EN 60065:2002 A11:2008 + EN 60065:2002 A2:2010 + EN 60065:2002 A12:2011

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.085

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

384000

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053059166

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

60

PACKAGING NET WEIGHT

0.085

UNITARY PACKAGING GROSS WEIGHT

0.085

PACKAGING WIDTH

80

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

80