


Group of 2 two-way switches 10 AX 250V~ with quick terminal connection system Simon 75

REF. 75397-39

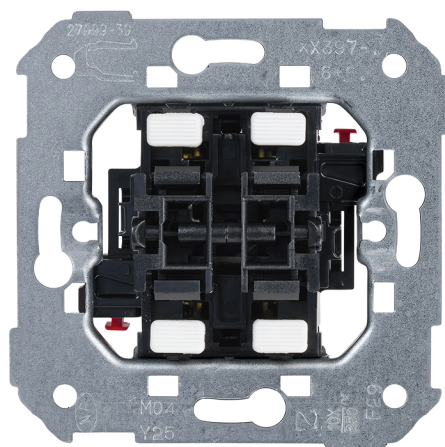

BASIC INFORMATION

DESCRIPTION

Group of 2 two-way switches 10 AX 250 V~ Simon 75 with quick terminal connection system, designed for the control of two lighting circuits switched from different points in the installation. It supports a nominal current of 10 AX at 250 V~ 50 Hz, offering an efficient and safe solution for residential and professional applications. It incorporates an insertion connection system that allows for agile and reliable wiring, accommodating conductors from 1.5 to 2.5 mm² with 11 mm stripping. Its tilting operation ensures precise and durable maneuvering in frequent uses. Manufactured with metallic components and halogen-free thermoplastic insulation, in accordance with the EN 60669-1 standard and European directives LVD and RoHS, it ensures resistance, safety, and full compatibility with the Simon 75 series and compatible frames.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept, and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 30
NUMBER OF CONTACTS 4	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Double
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 6

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053256039

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.068

PRODUCT NET WEIGHT

0.068

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053003985

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.68

PACKAGING NET WEIGHT

0.68

PACKAGING WEIGHT UNIT

KGM

