


2-way switch 16AX 250V~ with 1click® terminal connection system

REF. 7700211-039

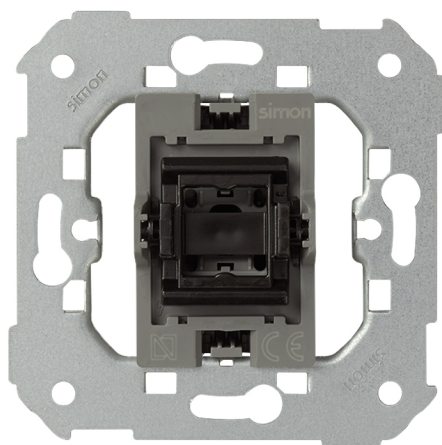

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature, Simon 82 and
Simon 88 frames

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

16 AX

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

No

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

INSTALLATION AND MAINTENANCE

CLAW

Simon 27

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

1 click connection (1 click®)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008 + EN 60998-2-3:2004

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053256497

UNITARY PACKAGING WEIGHT
UNIT

KGM

UNITS CONTAINED PACKAGING

5

UNITARY PACKAGING GROSS
WEIGHT

0.064

UNITARY PACKAGING WIDTH

0

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053080092

PACKAGING VOLUME

1.518

UNITARY PACKAGING LENGTH

0

PACKAGING GROSS WEIGHT

0

PACKAGING VOLUME UNIT

DMQ

PRODUCT NET WEIGHT

0.064

PACKAGING HEIGHT

82

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING VOLUME

0

PACKAGING LENGTH

223

PACKAGING WIDTH

83

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING NET WEIGHT

0.32