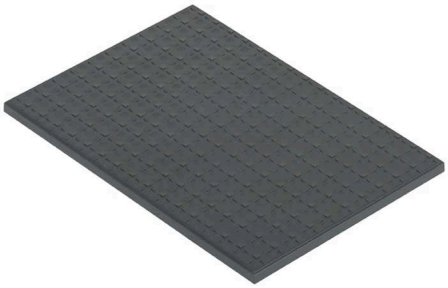
Flush-mount trim cover for adjustable floor box or service cover 4 elements grey Simon 500 Cima

REF. **52053102-035**



BASIC INFORMATION

DESCRIPTION

Specially designed to be installed in raised floor, the adjustable Floor box for four elements in grey colour of the Simon 500 Cima series is one of the most demanded products to be installed in all types of public and private buildings, thanks to their quality and low price. This is an element of 171 x 187 x 92 mm with an innovative design that matches all types decorations. It also stands out the strength of its structure against knocks, impacts thanks to the metal components with self-extinguishing and halogen-free thermoplastic insulation., a material that guarantees no flame propagation in case of fire and the low toxicity in case of smoke. Also, once the product has been configured and installed, as an option, it may be combined with the flush-mount trim cover (ref.52053102-035) in cases where you do not install the same floor covering.

FINISH

Grey

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+90 °C

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
4 modules

RAL
7011

VERSION
4 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with adjustable floor boxes or service covers

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.077

PRODUCT NET WEIGHT
0.077

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101506

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
170

PACKAGING MEASUREMENT UNIT
MMT

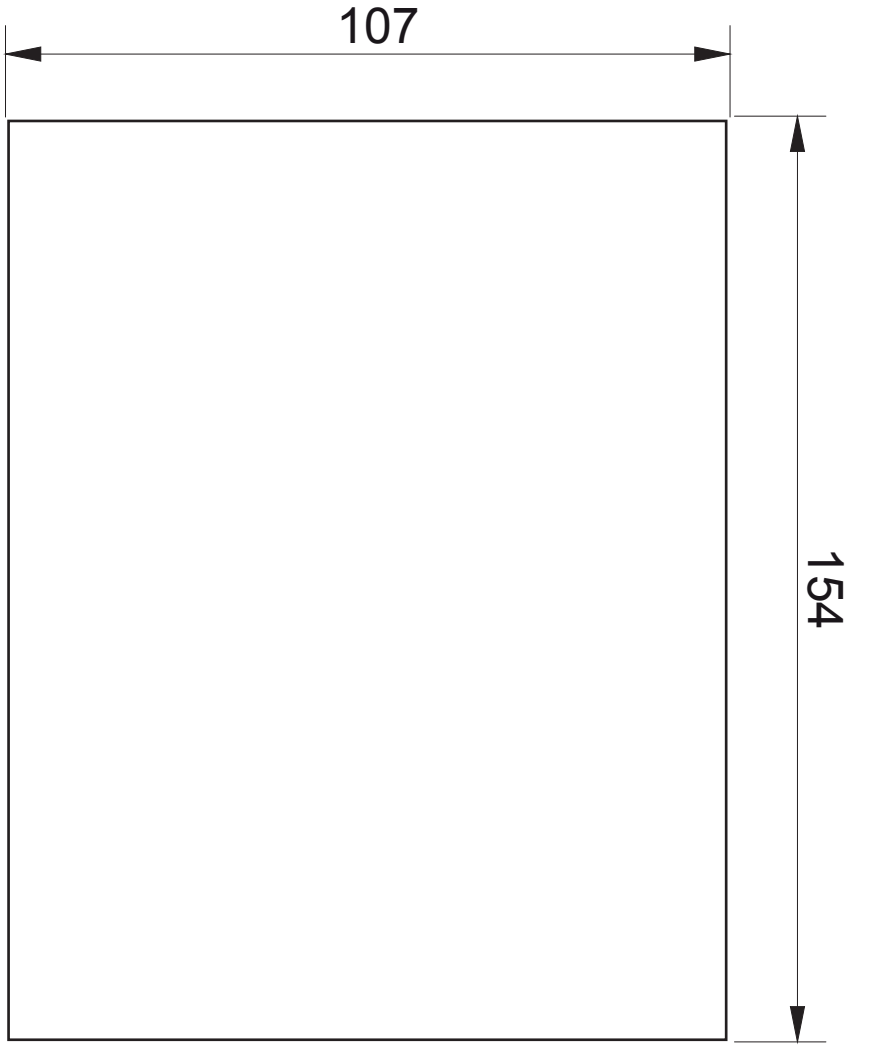
PACKAGING VOLUME
2.116

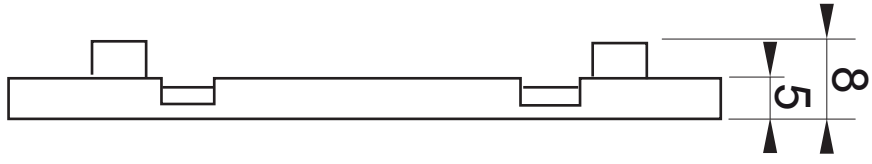
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.77

PACKAGING WEIGHT UNIT
KGM


107
154


8
5