


Flat voice and data plate with dust cover for 1 element with 1 RJ45 category 6A FTP aluminium Simon 500 Cima

REF. 50001085-033

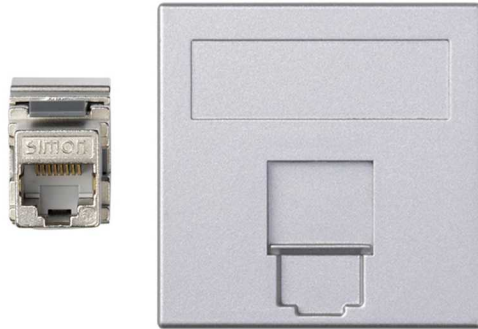

BASIC INFORMATION

DESCRIPTION

Flat base plate for data and voice in aluminium colour of the Simon 500 Cima series, with dust cover and 1 element with 1 RJ45 category 6A FTP Keystone I, II, ATT ® / Avaya ®. This plate includes the clips to be able to set it in both vertical and horizontal enclosures without the need of that you have to use any type of adapter. It measures 50 x 50 x 44 mm and allows cabling 22-24 AWG and has been designed in accordance with the regulation TIA 568 C. 2. Have been used for its manufacture metal components with halogen-free thermoplastic, self-extinguishing halogen-free, so that it is to ensure no flame spread in case of fire, if it is producing a fire, and low toxicity in case of smoke exist. It can be installed in rooms with temperatures between -5 and the most of 60 ° C and to make cleaning, just need a soft and dry cloth, never use a cloth and / or abrasive cleaner that contains some chlorine in its formula.

FINISH

Aluminium

PACKAGING CONTENTS

Flat voice and data plate with dust cover, RJ45 connector category 6A FTP and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

Yes

PLATE TYPE

Flat

CABLE SECTION ADMITTED (MM)

22-24 AWG wiring

FORMAT

RJ45

RJ45 ADAPTOR MODULE

Included in voice and data plate

RJ45 CONNECTION

Without insertion tool

IP RATING

IP20

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

CONNECTOR CHARACTERISTICS

category 6A FTP

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

NUMBER OF CONNECTORS

1

VERSION

Single

RJ45 CONNECTORS

Included in voice and data plate

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

NUMBER OF MODULES

1

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053097977

PACKAGING VOLUME

0.052

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

20

PACKAGING VOLUME UNIT

HLT

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS
WEIGHT

0.063

PACKAGING WIDTH

224

PACKAGING NET WEIGHT

1.26

PRODUCT NET WEIGHT

0.063

PACKAGING LENGTH

290

PACKAGING WEIGHT UNIT

KGM

