


2-way switch 16AX 250V~ with fast terminal connection system

REF. 75211-39

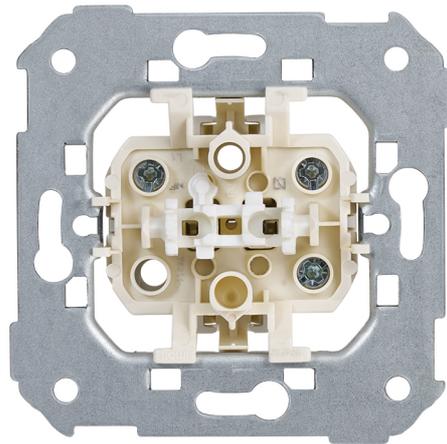

BASIC INFORMATION

DESCRIPTION

Another successful collection is the Simon 75 series, which includes an extensive range of combinations of colours and shapes. This, at the design level. In terms of features and functions, also provides multiple options: From adjustment and lighting control, centralisation of blinds, signalling system to functions of security and protection. This 2-way switch with 1 element resists up to 16 Amps and 250 Volts, and its installation is really simple: With quick terminal connection and suitable for surface and flush mounting. In this product, the user has the possibility to implement a signalling function by means of a signaling support and its rocker with viewer. In terms of design, the Simon 75 series has 13 different finishes in frames and the rockers in up to 6 different colours, making the possibilities are very multiple and varied. Appealing options for all tastes of this collection, the Simon 75 series.

MATERIAL

Plastic,Metal

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 3	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY (HZ) 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 3
CURRENT (A) 16 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 13	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE 8421053255872	UNITARY PACKAGING GROSS WEIGHT 0.063	PACKAGING LENGTH 223
UNITARY PACKAGING HEIGHT 0	PRODUCT NET WEIGHT 0.063	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING WIDTH 0	UNITARY PACKAGING WEIGHT UNIT KGM	PACKAGING VOLUME 3017190
UNITARY PACKAGING LENGTH 0	PACKAGING EAN 8421053025321	PACKAGING VOLUME UNIT MMQ
UNITARY PACKAGING MEASUREMENT UNIT MMT	UNITS CONTAINED PACKAGING 10	PACKAGING GROSS WEIGHT 0.63
UNITARY PACKAGING VOLUME 3017190	PACKAGING HEIGHT 82	PACKAGING NET WEIGHT 0.63
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING WIDTH 165	PACKAGING WEIGHT UNIT KGM