


Push-button switch 10A 24V~ with built-in green LED and fast terminal connection system

REF. 75553-39

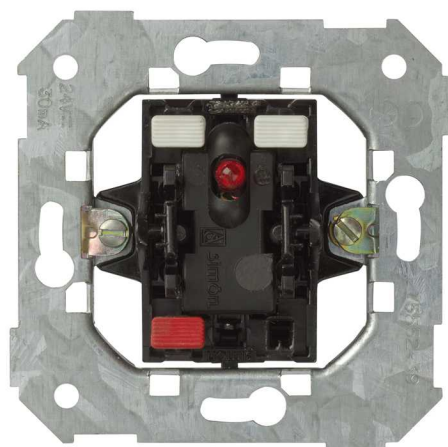

BASIC INFORMATION

DESCRIPTION

Push-button switch with incorporated green LED and quick terminal connection of the Simon 75 series. The Simon 75 series offers multiple combinations of colour, since it has intermediate pieces in 15 colours, frames in 13 finishes and rockers in 6 different colours. Also, all the elements of this series are compatible with the Simon 77 series, which allows you to connect the cables without needing to strip or braid them. It has a rocker operation and can be both surface or flush mounted, so it is in places with a temperature located between 5 and 40°C, although it's true that it is capable of withstanding extreme temperatures of -25 to 50°C, approximately. It supports a cable section of 1.5 to 2.5 mm with a stripped 11mm and complies with regulations UNE-EN 50428:2006 + A1:2008 + A2:2009. This push-button switch is made of metal components with halogen-free thermoplastic insulation.

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

10 AX

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CONSUMPTION INDICATOR (mA)

1 mA

IP RATING

IP20

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

24 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

CLAW

Simon 27

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
3017190

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.072

PRODUCT NET WEIGHT
0.072

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8421053029343

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
82

PACKAGING WIDTH
165

PACKAGING LENGTH
223

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
3017190

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.72

PACKAGING NET WEIGHT
0.72

PACKAGING WEIGHT UNIT
KGM