

Downlight 715.22 Flush mount WW General

REF. 71522030-983



BASIC INFORMATION

DESCRIPTION

Model spotlight for Indoor lighting reference number 71522030-983, spotlight of the Downlight type Belonging to the agama professional 715. Designed to offer a lighting Stable and continuous in working environments. It is an element for Indoor lighting with great technical features and aesthetics, it has a few values Lighting of colour WW and a diagram of optics character has a GENERAL. Controlling the type ON-OFF with values of power up to 20 W Spotlight for Indoor lighting for installations for flush mounting, model in colour, colour and Finished in white, with dimensions of 230mm () x37mm

APPLICATION

General lighting

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

REMARKS

Rising heat dissipation, does not damage the wall.

TECHNICAL INFORMATION

FREQUENCY

50 Hz

CRI

80

LIGHTING EFFICIENCY (LM/W)

85 lm/W

IP RATING

IP20

DIRECTIONAL

No

LUMENS (LM)

1700 lm

OPERATING TEMPERATURE RANGE (°C)

-15 - 35 °C

DRIVER INCLUDED

Yes

LUMENS/W

1700 lm/20W

POWER SUPPLY (V~)

220/240 V~

ELECTRICAL CLASS

Type 2

OPTICS

General

COLOR TEMPERATURE (K)

3000 K

INTEGRATED POWER SUPPLY

Yes

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

CONTROL

On/Off

L70 (°C)

30,000 h at 25 °C

POWER (W)

20 W

COS Φ

0.95

COLOR TYPE

WW

SERVICE LIFE

30.000 h

CHROMATICS CRI ICONS

CRI
80


PHOTOMETRY ASSETS – CONICAL

0.5	1.06 1.06	E(0°) 2920 E(C90) 469 E(C0) 475
1.0	2.13 2.11	E(0°) 730 E(C90) 117 E(C0) 119
1.5	3.19 3.17	E(0°) 324 E(C90) 52 E(C0) 53
2.0	4.26 4.23	E(0°) 182 E(C90) 29 E(C0) 30
2.5	5.32 5.29	E(0°) 117 E(C90) 19 E(C0) 19
3.0	6.39 6.34	E(0°) 81 E(C90) 13 E(C0) 13

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]

— C0 - C180 (Semiángulo de dispersión: 93.2°)
— C90 - C270 (Semiángulo de dispersión: 93.6°)

PHOTOMETRY ASSETS – POLAR

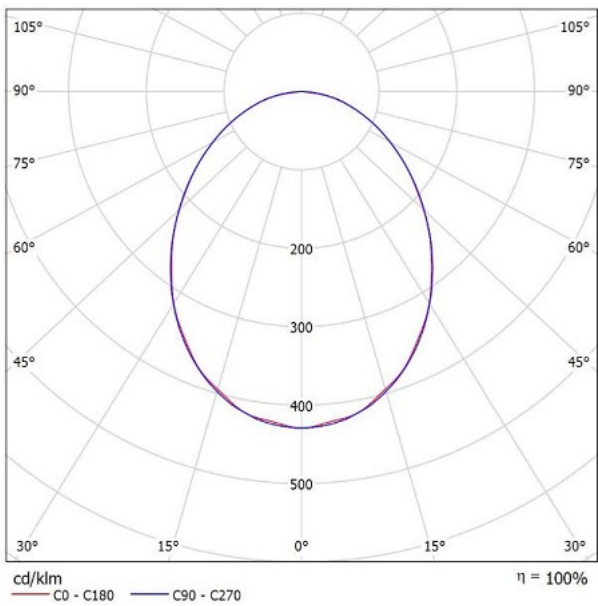

INSTALLATION AND MAINTENANCE

MINIMUM INSTALLATION
HEIGHT
45

INSTALLATION TYPE
Flush mount

TYPE OF TERMINAL
CONNECTION - FUNCTION 1
Screw

REGULATIONS

WARRANTY
3 years 30,000 h

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053145180

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.69

PRODUCT NET WEIGHT

0.44

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053145180

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

70

PACKAGING WIDTH

265

PACKAGING LENGTH

255

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

4730250

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.69

PACKAGING NET WEIGHT

0.44

PACKAGING WEIGHT UNIT

KGM