


2-way rotary dimmer switch 40 to 500W/VA white Simon 27 Play

REF. 27313-35

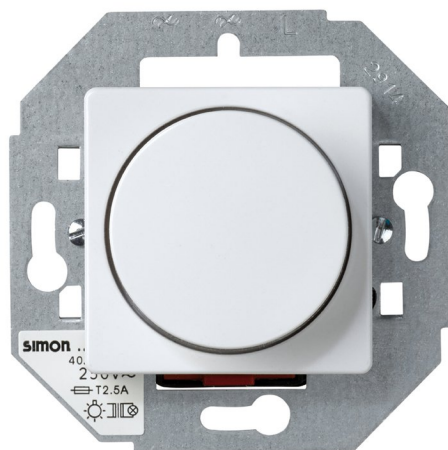

BASIC INFORMATION

DESCRIPTION

For greater efficiency linked to the most avant-garde design, Simon 27 pay offers the regulator 2-way switch rotary light, with the that will be monitored by the light intensity of any space. With a few finishes in a discreet and stylish colour, this - white regulator 2-way switch is compatible with a voltage of 230 Volt and power from 40 to 500 W / VA. Consists of 2 modules for 1 element, in a size of 45 x 45 mm, with 3 pins, 2 wires and 1 adjustable circuit. Its electronic components are isolated with halogen-free and thermoplastic trim of the same material, to guarantee protection in case of fire. It can reach maximum temperatures of -20 to 75 °C. Its installation is designed to be recessed or surface-mounted, with screw terminal connection and a cable section cross-section of 1.5 to 2.5 mm and stripping of 5 mm With this mechanism, it is not possible to connect two electronic voltage regulators in the same circuit.

FINISH

White

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

Yes

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27 and Simon 44 Aqua frames

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

500 W/VA

COMPATIBLE WITH MECHANICAL SWITCH

No

PACKAGING CONTENTS

Dimmer and instruction sheet

REMARKS

Two main electronic voltage regulators cannot be connected in the same circuit.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST	MAXIMUM QUANTITY PER CIRCUIT
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	No	1
NUMBER OF CONTACTS 3	COMPATIBLE WITH FLUORESCENT LAMPS (VA)	TYPE OF MECHANISM
NUMBER OF CONTROLLABLE CIRCUITS	No	Rotary
1	INDICATOR FUNCTION	MINIMUM POWER (W)
COMPATIBLE WITH HALOGENS WITH ELECTROMAGNETIC TRANSFORMER (W)	No	40
350 W	IP RATING	COMPATIBLE WITH MOTORS (VA)
COMPATIBLE WITH ELECTRONIC AUXILIARY	IP20	No
No	COMPATIBLE WITH LOW CONSUMPTION (W)	OPERATING TEMPERATURE RANGE (°C)
NUMBER OF POSSIBLE ELEMENTS	No	0 - 40 °C
1 element	MAINTENANCE	POWER SUPPLY (V~)
	Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	230 V~
	MAXIMUM POWER (W)	TYPE
	500	2-way dimmer switch
		VERSION
		Single
		NUMBER OF WIRES
		2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX	INSTALLATION TYPE
5	Universal and American	Suitable for surface and flush mounting
CLAW		
Included		

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-1:2004 + EN 60669-2-1:2004 A1:2009 + EN 60669-2-1:2004 A12:2010

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

56.2

UNITARY PACKAGING GROSS WEIGHT

155

PACKAGING LENGTH

76

UNITARY PACKAGING WIDTH

71

PRODUCT NET WEIGHT

132

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING LENGTH

71.2

UNITARY PACKAGING WEIGHT UNIT

GRM

PACKAGING VOLUME

0.329

UNITARY PACKAGING MEASUREMENT UNIT

MMT

PACKAGING EAN

8421053011591

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0.284

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.155

UNITARY PACKAGING VOLUME UNIT

DMQ

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

132

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM