

Set of 2 switches 10AX 250V~ with fast terminal connection system ivory Simon 31

REF. 31398-31



BASIC INFORMATION

DESCRIPTION

With the group of 2 switches of Simon 31, you will obtain the maximum functionality and innovation in a compact design and simple lines that adapt to all types of spaces. Its size of 64 x 65 mm and its finishes in ivory when connected to the simplicity of its quick terminal connection, without the need for additional tools, make this product in the perfect balance between innovation and style. Compatible with power supplies voltage of 250 Volts and 10 AX of intensity, this group of switches supports a wire cross section of 1.5 to 2.5 mm and stripping of 11 mm wire. It is made of metal materials with halogen-free insulation and thermoplastic trim, for greater protection of the room in case of fire, and allows to set reach maximum temperatures of -25 to 50 °C. For greater versatility of the product, Simon 31 offers 5 different finishes, but it is recommended to combine frame and rockers of the same colour.

FINISH

Ivory

PACKAGING CONTENTS

Mechanism with rocker

COMPATIBILITY

Simon 31 frames

ETIM CLASS

EC001590

REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected rocker.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

NOMINAL VOLTAGE (V~)

250 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP21

OPERATING TEMPERATURE

RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE

(°C)

-25 - 50 °C

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VERSION

Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

PACKAGING EAN
8421053006870

PACKAGING VOLUME
3026595

UNITARY PACKAGING LENGTH
0

UNITS CONTAINED PACKAGING
10

PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING VOLUME
0

PACKAGING HEIGHT
83

PACKAGING GROSS WEIGHT
0.83

UNITARY PACKAGING GROSS
WEIGHT
0.083

PACKAGING WIDTH
165


PACKAGING NET WEIGHT
0.83

PRODUCT NET WEIGHT
0.083

PACKAGING LENGTH
221


PACKAGING WEIGHT UNIT
KGM

Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XXXX101-XXX

Interruptor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX

Pulsador / Push button switch
7700150-039

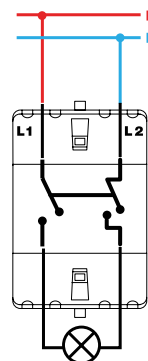

Interruptor bipolar / Double pole switch
XXXX133-XXX

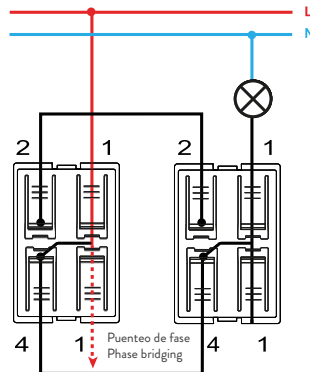

Conmutador / 2-way switch
XXXX201-XXX

Conmutador / 2-way switch
7700201-039



Conmutador cruce / Intermediate switch
XXXX251-XXX



Conmutador cruce / Intermediate switch
7700251-039



Grupo 2 interruptores / 2 switches group
XXXX398-XXX



Pulsador desconexión / Push button disconnection switch
XXXX152-XXX



Grupo dos conmutadores / 2-way switches group
XXXX397-XXX



Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX



Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX



Interrupor unipolar / Single-pole switch
XXXX102-XXX



Interrupor con piloto / Push button pilot switch
7700112-039



Interrupor bipolar / Double pole switch
XXXX134-XXX



Conmutador / 2-way switch
XXXX202-XXX



Interruptor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX



Pulsador con luminoso / Push button switch with light
XXXX160-XXX



Pulsador con luminoso / Push button switch with light
7700160-039



Conmutador con luminoso / 2-way switch with light
XXXX204-XXX



Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX