Flat voice and data plate with dust cover for 2 RJ45 Nexans® for 1 element graphite Simon 500 Cima

REF. **50018089-038**



BASIC INFORMATION

DESCRIPTION

A good connection is fundamental in current times, but a successful installation it will save us time and money with any mishap that may arise. The system of connections 500 Cima, Simon offers us a new click terminal connection, simple and safe, for greater security in the installations. This series also has a vast range of mechanisms for any type of connection, whether electrical, voice, data or multimedia. Simon makes available to our solutions for any type of ambience, always with an appearance stylish and modern. As this plate for voice and data connections, one element and two Nexans ® RJ45 connectors. It has a graphite finish, with dust cover, it has a flat plate and includes a snap-fit to fix in wrappers. It is also manufacturing with the best materials and thermoplastic components halogen-free, fireproof, self-extinguishing.

FINISH

Graphite

PACKAGING CONTENTS

Flat voice and data plate with dust cover

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE WITH CONNECTORS
Nexans® LANmark®-5 EVO, LANmark®-6 EVO.

RJ45 CONNECTORS
Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Flat

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
RJ45 Nexans® connectors

SNAP-FIT TYPE
RJ45 Nexans® connectors

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
26

UNITARY PACKAGING WIDTH
58

UNITARY PACKAGING LENGTH
86

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
129688

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.028

PRODUCT NET WEIGHT
0.028

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053097083

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
26

PACKAGING WIDTH
58

PACKAGING LENGTH
86

PACKAGING MEASUREMENT UNIT
MMT

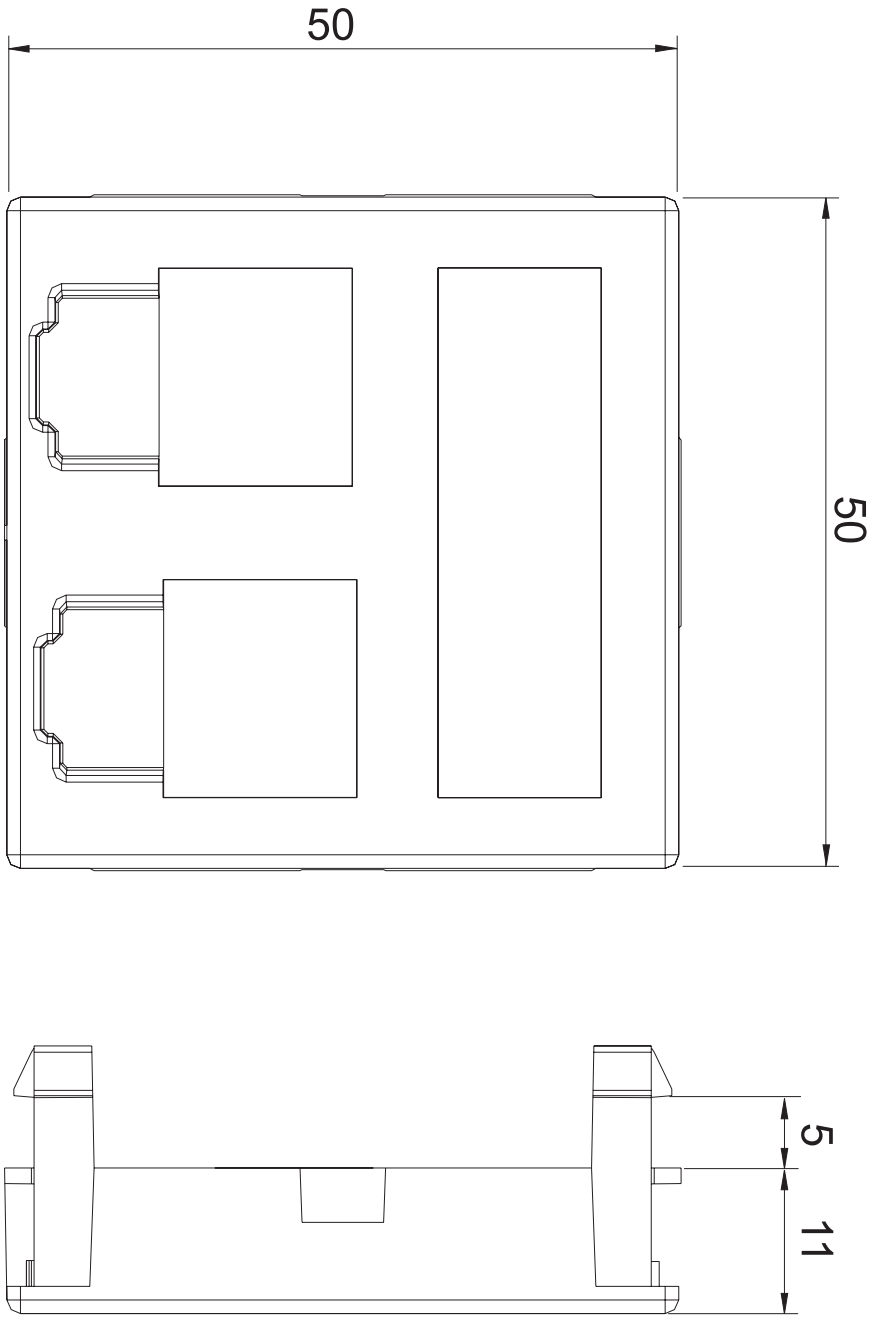
PACKAGING VOLUME
0.604

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.28

PACKAGING WEIGHT UNIT
KGM


50
50
5
11