# Complete kit with dual opening cover, brushes and 8 schuko socket outlets white S400 Indesk Duo

REF. **46404000-130**



## BASIC INFORMATION

### DESCRIPTION

For those who need a product of design, functional and with a large number of connections, Simon launches this kit of the table complete with cover for 2 opening, brushes and 8 socket outlets white, of the series Simon 400 Indesk Duo. With a voltage of 250 volts and 16 A of intensity. This piece of great resistance is made of metal and has a profile in anodised aluminium, which added to its enclosure painted steel gives it great resistance to all kinds of knocks. Simon works hard to offer products durable and safe, therefore, to avoid accidents, create his series 400 with covers and fastenings using the self-extinguishing halogen-free thermoplastic that guarantees no flame spread in case of fire and not given off fumes toxic. To complete its installation, it must be combined with the Simon 400 Indesk Duo. Its maintenance is very simple, as a simple soft, dry cloth is sufficient to maintain this kit like the first day.

### FINISH

White

### MATERIAL

Metal

### COMPATIBILITY

Can be combined with the range of Electric Cabling from Simon.

### PACKAGING CONTENTS

Pre-wired profiles, enclosure, fastening claws, 3-pole T-branching with 1 male input and 2 female outputs and installation manual.

### ETIM CLASS

EC002759

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

### PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the included protective cover and cable outlet with brush

### DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+60°C

### FORMAT
Schuko

### HEAT RESISTANCE (°C)
+70°C (according to standard IEC 60670)

### INSULATION RESISTANCE (V-MΩ)
>5 M? at 500 V

### CURRENT (A)
16 A

### IP RATING
IP30

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 at +60° C

### NOMINAL VOLTAGE (V~)
250 V~

### TYPE OF POWER SUPPLY CONNECTOR
Wieland® GST 18i male 3-pole overhead connector with 22 cm patch cord

### RAL
9016

### RECESS DIMENSION (MM)
228 x 175 mm (± 2mm)

### NUMBER OF SOCKETS
8 sockets for standard current circuit

### VERSION
8 elements

## INSTALLATION AND MAINTENANCE

### CABLING ACCESS
With brush

### CLAW RANGE OF OPERATION (MM)
Between 20 and 40 mm

### NUMBER OF COVER OPENING POSITIONS
2

### EXTINGUISHING (°C)
+70 °C (according to standard IEC 60670)

### TYPE OF FASTENING
By lateral tightening of claws provided with the enclosure. Optional possibility to fasten the enclosure with screws through the provided holes in the sides of the enclosure chassis.

### REMOVAL OF THE FRAME
Only with tool

### INSTALLATION TYPE
Suitable for recessed mount in furniture.

### OPENING ORIENTATION
At 45° and 135°

### SECURING POSSIBILITIES
Using supplied claws or screws in the available holes

### MOUNTING WITHOUT ACCESSORIES
Supplied with all necessary materials for installation.

## REGULATIONS

### REGULATIONS

Directiva 2014/35/UE LVD;Directiva 2011/65/UE RoHS;EN 50581:2012;EN 60670-1:2005;EN 60670-1:2005 A1:2013;IEC 60884-1 Ed 3.2;

## LOGISTICS INFORMATION

### UNITARY EAN CODE
8421053197059

### UNITARY PACKAGING HEIGHT
0

### UNITARY PACKAGING WIDTH
0

### UNITARY PACKAGING LENGTH
0

### UNITARY PACKAGING VOLUME
0

### UNITARY PACKAGING GROSS WEIGHT
2.35

### PRODUCT NET WEIGHT
2.35

### UNITARY PACKAGING WEIGHT UNIT
KGM

### PACKAGING EAN
8421053197059

### UNITS CONTAINED PACKAGING
1

### PACKAGING HEIGHT
370

### PACKAGING WIDTH
135

### PACKAGING LENGTH
200

### PACKAGING MEASUREMENT UNIT
MMT

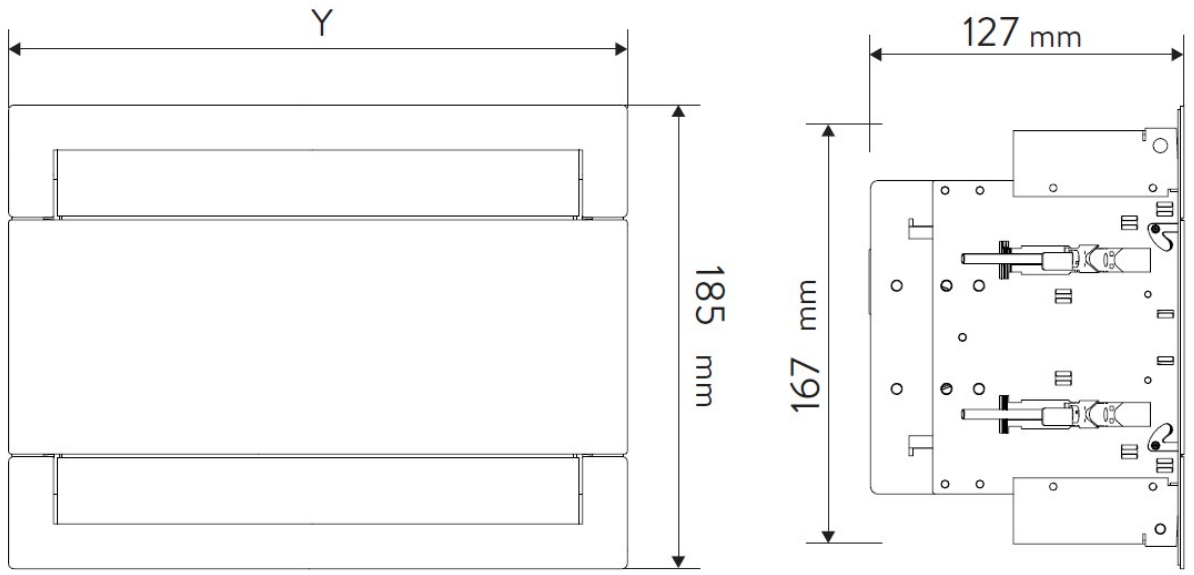
### PACKAGING VOLUME
9990000

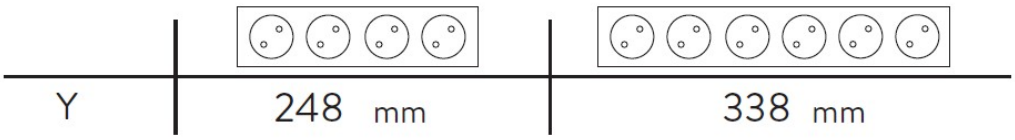
### PACKAGING VOLUME UNIT
MMQ

### PACKAGING GROSS WEIGHT
0

### PACKAGING NET WEIGHT
2.35

### PACKAGING WEIGHT UNIT
KGM


Y
185 mm
127 mm
167 mm


Y
248 mm
338 mm