


**Voice and data angled plate with dust cover for 1 element
for 1 RJ45 connector aluminium Simon K45**

REF. K80/8

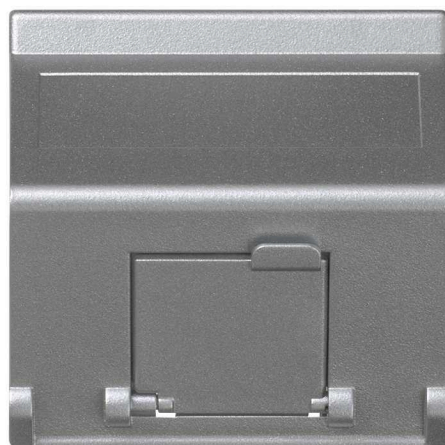

BASIC INFORMATION

DESCRIPTION

Angled plate for 1 and 2 RJ45 connectors according to combined MD module of the series Simon K45 and that is used for both voice and data and with dust cover. It is a plate individual type and with an average number of modules, which has been manufactured according to the regulation UNE-EN 60670-1: 2006 in thermoplastic of colour white halogen-free, so that make it a very safe plate since avoiding flame spread (in case of fire) as well as a high toxicity (in the event of smoke generation). It is suitable for installation both in surface-mounted and recessed in rooms with a temperature located between the -5 and 60 ° C, which makes it an option of voice and data plate, perfect for all types of climatology. Its cleaning is quite simple, just use a soft, dry cloth to clean it.

FINISH

Aluminium

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Inclined voice and data plate with dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

FORMAT

RJ45

NUMBER OF MODULES

Half

AVAILABLE IN

Plate for 1 and 2 RJ45 connectors

IP RATING

IP20

PLATE TYPE

Angled

RJ45 CONNECTORS

Not included in voice and data plate

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

According to combined MD module

DUST PROTECTION

Yes

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

SNAP-FIT TYPE

According to combined MD module

DUST SHUTTER

Yes

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.01

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

1472064

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436050228

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

73603

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.29

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

88

PACKAGING NET WEIGHT

0.2

UNITARY PACKAGING GROSS
WEIGHT

0.01

PACKAGING WIDTH

123

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

136