

Set of 2 switches 10AX 250V~ with fast terminal connection system white Simon 31

REF. 31398-30



BASIC INFORMATION

DESCRIPTION

Group of 2 switches 10 AX 250V~ with quick terminal connection system of white colour and included in the Simon 31 series. This collection is equipped with mechanisms of simple and functional lines that, nevertheless, have the ability to update any environment. The mechanism is available in 5 different finishes, the ideal is to choose a frame with the same finish as the rocker in question for a more satisfying result. The product has dimensions of 64x65 mm and is manufactured in compliance with the regulation. It consists of metal components with halogen-free thermoplastic insulation, a material that provides maximum protection in the home. Meanwhile, the trim is made of thermo-stable plastic. This article is characterized by a high resistance to extreme temperatures, although it is advisable to install it in environments between 5 and 40°C. For maintenance, you can use a soft cloth and moistened in soapy water and avoid the use of abrasive cleaners.

FINISH

White

PACKAGING CONTENTS

Mechanism with rocker

COMPATIBILITY

Simon 31 frames

ETIM CLASS

EC001590

REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected rocker.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

NOMINAL VOLTAGE (V~)

250 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP21

OPERATING TEMPERATURE

RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VERSION

Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush
mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.083

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

3026595

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053005989

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.85

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

83

PACKAGING NET WEIGHT

0.83

UNITARY PACKAGING GROSS
WEIGHT

0.083

PACKAGING WIDTH

165

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

221

MECANISMOS SIMON 31, 75, 77, 82 Y 88

Mecanismos básicos / Basic switches



Interrupor unipolar / Single-pole switch
XXXX101-XXX



Interrupor unipolar / Single-pole switch
7700101-039



Pulsador / Push button switch
XXXX150-XXX



Pulsador / Push button switch
7700150-039



Interrupor bipolar / Double pole switch
XXXX133-XXX



Conmutador / 2-way switch
XXXX201-XXX



Conmutador / 2-way switch
7700201-039



Conmutador cruce / Intermediate switch
XXXX251-XXX



Conmutador cruce / Intermediate switch
7700251-039



Grupo 2 interruptores / 2 switches group
XXXX398-XXX



Pulsador desconexión / Push button disconnection switch
XXXX152-XXX



Grupo dos conmutadores / 2-way switches group
XXXX397-XXX




Grupo de pulsadores desconexión / Push button switch
desconexion group XXXX395-XXX



Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX



Interrupor unipolar / Single-pole switch
XXXX102-XXX

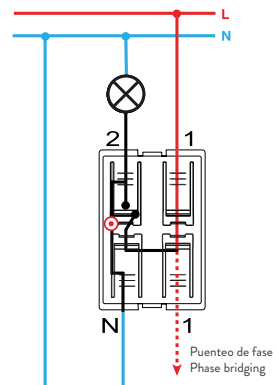

Interrupor con piloto / Push button pilot switch
7700112-039



Interrupor bipolar / Double pole switch
XXXX134-XXX



Conmutador / 2-way switch
XXXX202-XXX



Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX



Pulsador con luminoso / Push button switch with light
XXXX160-XXX



Pulsador con luminoso / Push button switch with light
7700160-039



Conmutador con luminoso / 2-way switch with light
XXXX204-XXX



Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX