

Double switch with screw terminal connection system titanium Simon 82 Concept

REF. 8200398-096



BASIC INFORMATION

FINISH

Titanium

PACKAGING CONTENTS

Double mechanism

COMPATIBILITY

Simon 82

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

No

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

2,5 mm

CURRENT (A)

10 AX

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 item

IP RATING

IP20

VERSION

Single

FORMAT

Rocker, mechanism and frame-holder

TYPE OF MECHANISM

Rocker switch

VOLTAGE (V~)

250 V~

MONOBLOCK

No

INSTALLATION AND MAINTENANCE

CLAW

Not possible

INSTALLATION TYPE

Suitable for surface or recessed mount

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053279960

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.08

PRODUCT NET WEIGHT

0.08

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053229804

UNITS CONTAINED PACKAGING

5

PACKAGING HEIGHT

82

PACKAGING WIDTH

83

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1.518

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT


0.4

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX

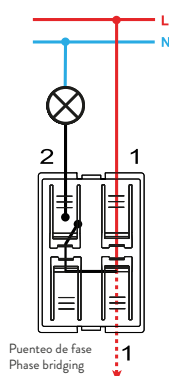


Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039




Interrupor bipolar / Double pole switch
XXXX133-XXX

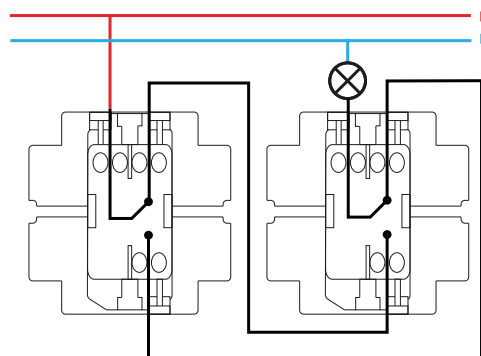


Conmutador / 2-way switch
XXXX201-XXX

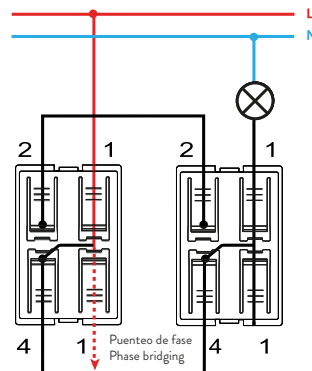


Conmutador / 2-way switch
7700201-039

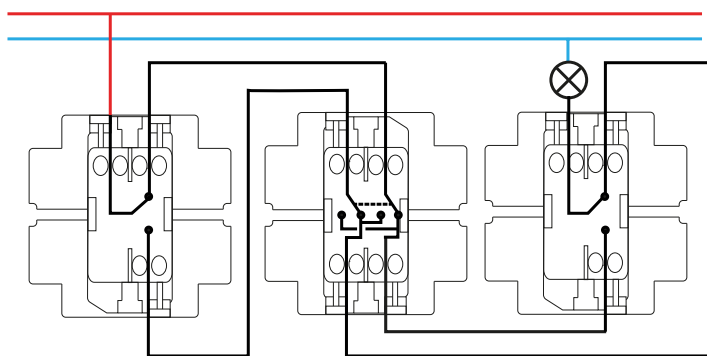


Conmutador cruce / Intermediate switch
XXXX251-XXX

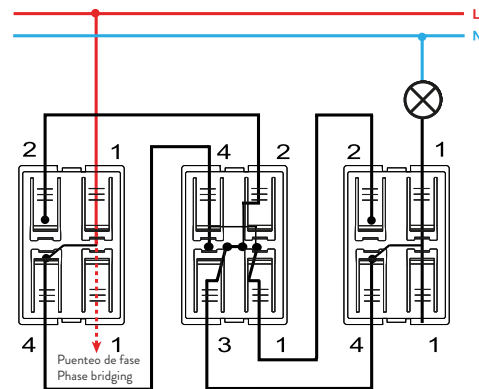


Conmutador cruce / Intermediate switch
7700251-039

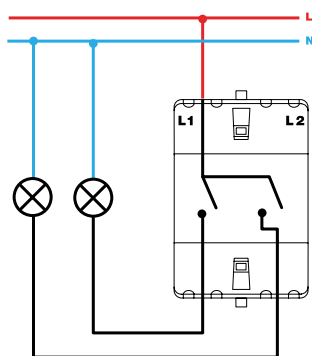


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

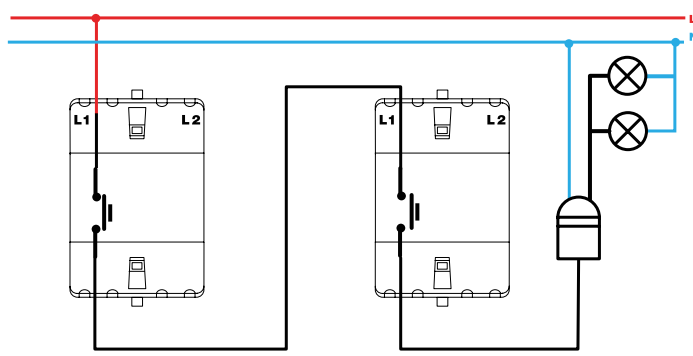


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

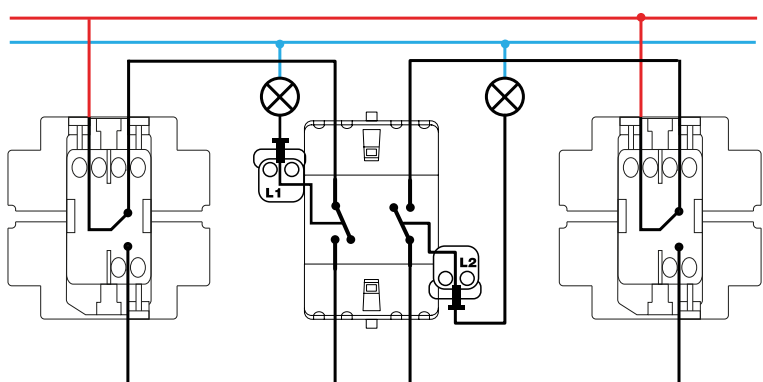


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

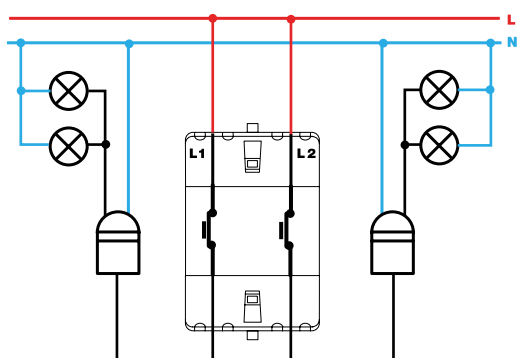


Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX

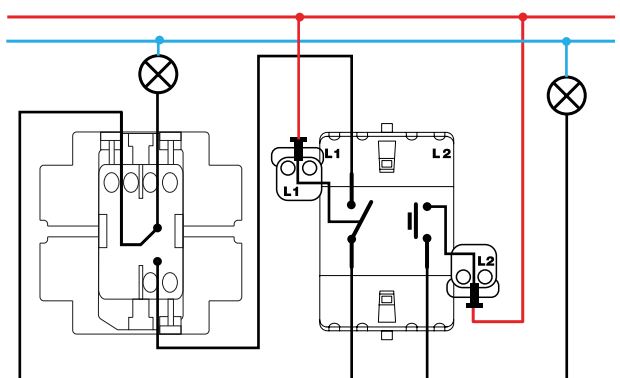


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

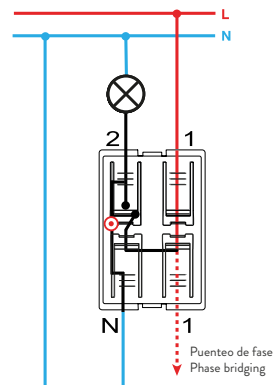


Interrupor con piloto / Push button pilot switch
7700112-039

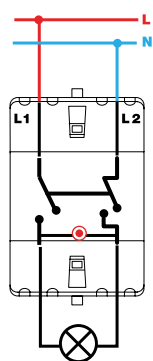


Interrupor bipolar / Double pole switch
XXXX134-XXX

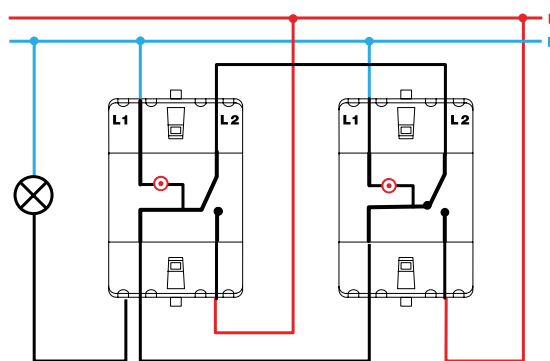


Conmutador / 2-way switch
XXXX202-XXX




Interruptor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

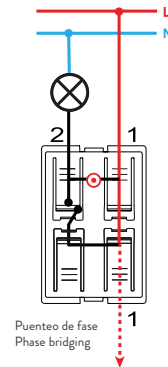

Pulsador con luminoso / Push button switch with light
7700160-039

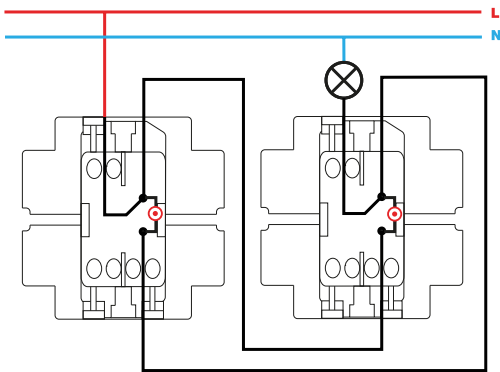

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

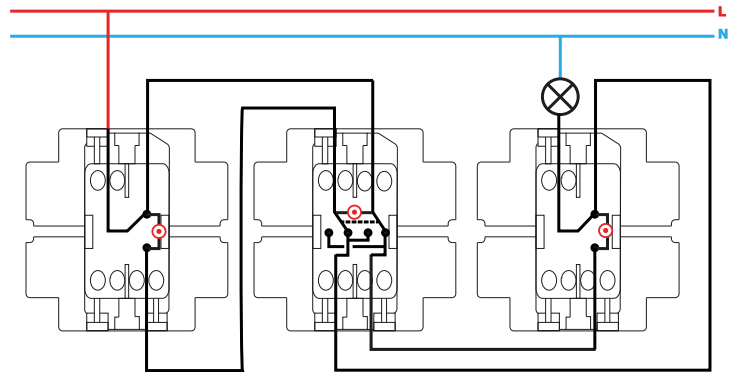

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX