


Single-pole switch 10AX 250V~ with built-in pilot light and fast terminal connection system Simon 28

REF. 26102-39

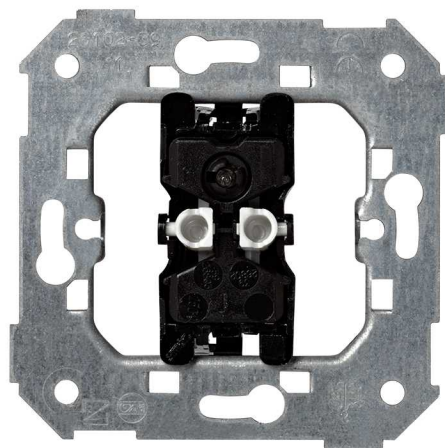

BASIC INFORMATION

DESCRIPTION

With a design curvilinear that brings character to any type of environments, the single-pole switch of the collection, Simon 28, combines functionality, innovation and design in a single space. With signalling function and pilot light, the tilting single-pole switch is composed of isolated thermoplastic materials with halogen-free, protecting the room in case of fire, and can reach maximum temperatures of -25 to 50 °C. With installation of quick terminal connection without the need to use tools screws, it is compatible with power supplies with a voltage of 250 Volts and 10 AX of intensity. The originality of a design of curved lines and ergonomic, with finishes in white, Simon 28 single-pole switch, guaranteeing the integration of the set in spaces with environments functional and discreet that busquen a touch of original finishes.

COMPATIBILITY

Simon 28 frames

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC001590

REMARKS

Can be combined with article 31803-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

TYPE OF MECHANISM

Pivoting

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

15

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
3017190

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.053

PRODUCT NET WEIGHT
0.053

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8421053015278

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
82

PACKAGING WIDTH
165

PACKAGING LENGTH
223

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
3017190

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.53

PACKAGING NET WEIGHT
0.53

PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44

Mecanismos básicos / Basic switches



Interrupor unipolar / Single-pole switch
XX00101-XX



Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX



Conmutador cruce / Intermediate switch
XX00251-XX

Mecanismos con piloto / Pilot switches



Interrupor unipolar / Single-pole switch
XX00102-XX



Interrupor bipolar / Double pole switch
XX00134-XX



Conmutador / 2-way switch
XX00202-XX



Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX



Conmutador cruce / Intermediate switch
XX2700254-XX