


Double-pole switch 16AX 250V~ with screw terminal connection system

REF. 75133-39

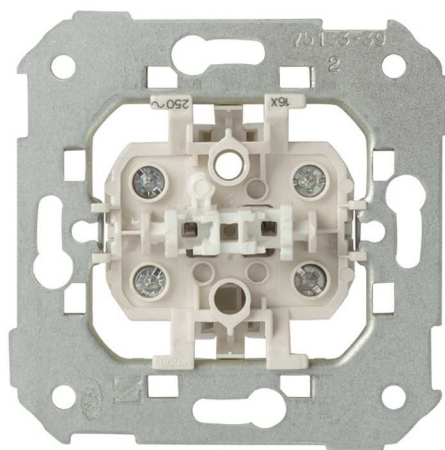

BASIC INFORMATION

DESCRIPTION

The Simon 75 series is one of the most versatile and efficient on the market of the products designed for electrical installations with infinite possibilities of design and colour. The two-pole switch with screw terminal connection included in this range stands out for its easy installation, which can be performed in a comfortable and simple way in just a few minutes, both in surface-mounted and flush-mounted, being its rocker operation. In addition to its great value for money, other features are: Intensity of 16A, a voltage of 250V ~, cable section 0'2 to 0'5 mm and stripping of wire 13 mm. This control mechanism has been manufactured with metal components with thermoplastic insulation, halogen-free in socket to the regulation in force, so it is one of the most used in buildings with a large influx of people.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

16 AX

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CABLE SECTION ADMITTED (MM)

From 0,2 to 0,5 mm

IP RATING

IP20

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

No

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

13

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255766

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.065

PRODUCT NET WEIGHT

0.065

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053036358

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3017190

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.67

PACKAGING NET WEIGHT

0.65

PACKAGING WEIGHT UNIT

KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88

Mecanismos básicos / Basic switches



Interrupor unipolar / Single-pole switch
XXXX101-XXX



Interrupor unipolar / Single-pole switch
7700101-039



Pulsador / Push button switch
XXXX150-XXX



Pulsador / Push button switch
7700150-039



Interrupor bipolar / Double pole switch
XXXX133-XXX



Conmutador / 2-way switch
XXXX201-XXX



Conmutador / 2-way switch
7700201-039



Conmutador cruce / Intermediate switch
XXXX251-XXX



Conmutador cruce / Intermediate switch
7700251-039



Grupo 2 interruptores / 2 switches group
XXXX398-XXX



Pulsador desconexión / Push button disconnection switch
XXXX152-XXX



Grupo dos conmutadores / 2-way switches group
XXXX397-XXX



Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX



Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX



Interrupor unipolar / Single-pole switch
XXXX102-XXX



Interrupor con piloto / Push button pilot switch
7700112-039



Interrupor bipolar / Double pole switch
XXXX134-XXX



Conmutador / 2-way switch
XXXX202-XXX



Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX



Pulsador con luminoso / Push button switch with light
XXXX160-XXX



Pulsador con luminoso / Push button switch with light
7700160-039



Conmutador con luminoso / 2-way switch with light
XXXX204-XXX



Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX