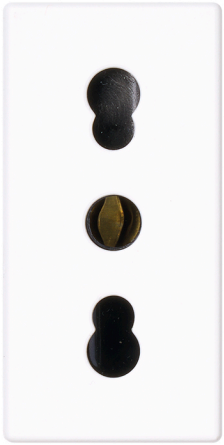
Italian bipasso socket outlet 10/ 16A with screw terminal connection 1 element white K45

REF. **K06/9**



BASIC INFORMATION

FINISH
White

MATERIAL
Plastic

COMPATIBILITY
Enclosures Simon K45 for installation on wall, floor, ceiling, and furniture, and enclosures Simon 500 Cima (requires combining with the K45 to 500 Cima adapter ref. 50012088-030).

ETIM CLASS
EC000125

TECHNICAL INFORMATION

FORMAT
Bipasso

IP RATING
IP20

RAL
9003

CURRENT (A)
10 / 16 A

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
12

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.026

PRODUCT NET WEIGHT
0.026

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053314111

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
245

PACKAGING WIDTH
50

PACKAGING LENGTH
100

PACKAGING MEASUREMENT UNIT
MMT

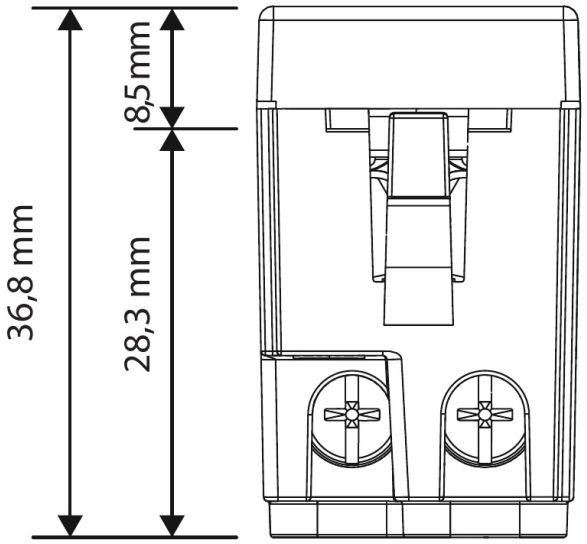
PACKAGING VOLUME
1225000

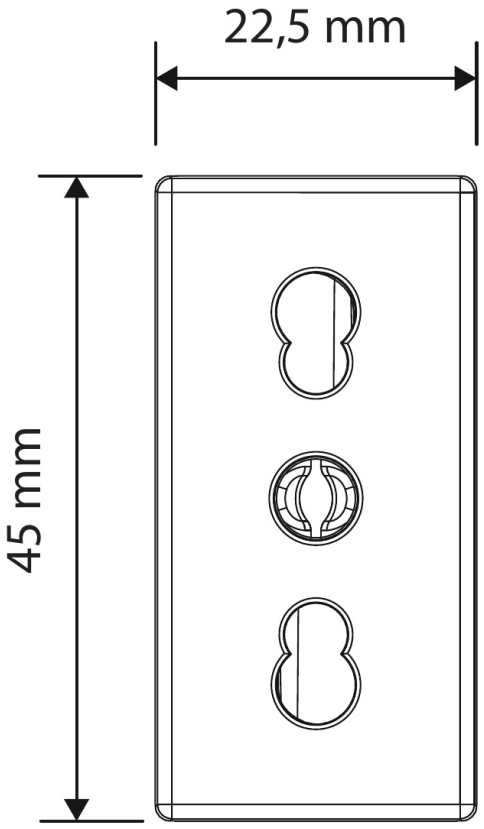
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.599

PACKAGING NET WEIGHT
0.52

PACKAGING WEIGHT UNIT
KGM


36,8 mm
28,3 mm
8,5mm


22,5 mm
45 mm