


Flush-mount trim cover for adjustable floor box or service cover 2 elements grey Simon 500 Cima

REF. 52053101-035

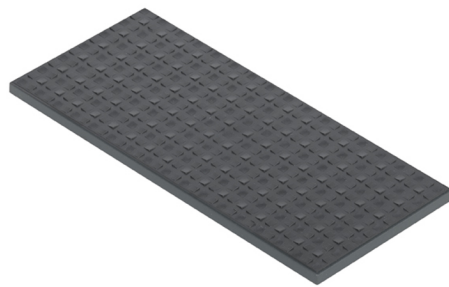

BASIC INFORMATION

DESCRIPTION

Designed exclusively for installation in raised floor box kit, our 8 elements for adjustable floor comprising 2 double socket socket for standard current circuit and 1 double UPS (uninterruptible power supplies) for stable current circuit and 2 plates for 2 RJ45 is part of the Simon 500 Cima series. This piece measures 187x283x92 mm and finishes in grey, insertion by cutting (1 click ® and is compatible with elements up to 250 Volt voltage and 16 Ampere current. Also, it consists of metal components with thermoplastic insulation coated self-extinguishing halogen-free to ensure no flame spread in case of fire notional in the event of a fire, in addition to a very low toxicity in the event of smoke generation. Thanks to our commitment to offer the best quality at a constant innovation in its products, the collection Simon 500 Cima manages to assemble all kinds of solutions for those who are looking for the best mechanisms functional on the market, which offer to turn the greater security.

FINISH

Grey

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IK CLASSIFICATION

08

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2, 4, 6, 8 and 12 elements

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

NUMBER OF MODULES

2 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

IP RATING

IP4X

RAL

7011

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

KIT AVAILABILITY

No

VERSION

2 elements

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Using the screws supplied

INSTALLATION TYPE

In raised or concrete floor with adjustable floor boxes or service covers

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

INSTALLATION DIRECTION

Horizontal, Vertical

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

PACKAGING EAN
8421053101483

PACKAGING VOLUME
1.714

UNITARY PACKAGING LENGTH
0

UNITS CONTAINED PACKAGING
10

PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING VOLUME
0

PACKAGING HEIGHT
70

PACKAGING GROSS WEIGHT
0

UNITARY PACKAGING GROSS
WEIGHT
0.052

PACKAGING WIDTH
154

PACKAGING NET WEIGHT
0.52

PRODUCT NET WEIGHT
0.052

PACKAGING LENGTH
159

PACKAGING WEIGHT UNIT
KGM

