


2-way rotary dimmer switch-from 100 to 1000 W/VA

REF. 75312-39

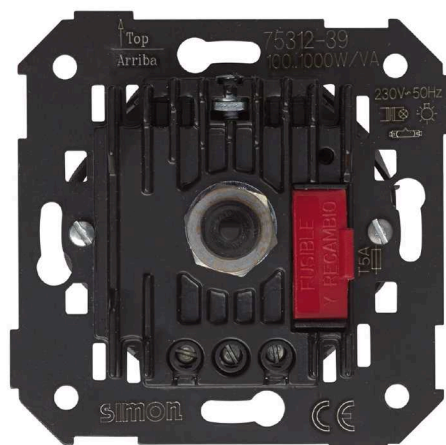

BASIC INFORMATION

DESCRIPTION

The series Simon 25, in its collection of mechanisms, it includes the - regulator 2-way switch rotary light that allows a control of the light attenuation of a room with high precision. In its individual version consists of a single element. Its current is from the 100 to 1000 W / VA. It has a voltage of 230 V ~ It has a screw terminal system and its operation is rotary format. It can be installed in surface-mounted or in any universal recessed box. The cable section allowed is from 1.5 to 2.5 mm The required wire stripping is 6-mm. It is manufactured with a set of electronic components, with halogen-free thermoplastic isolated.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82 frames

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)
1000 W

COMPATIBLE WITH MECHANICAL SWITCH

No

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

Yes

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

PACKAGING CONTENTS

Dimmer and instruction sheet

ETIM CLASS

EC000025

REMARKS

Two main electronic voltage regulators cannot be connected in the same circuit.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST No	TYPE OF MECHANISM Rotary
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm		MINIMUM POWER (W) 100
NUMBER OF CONTACTS 3	COMPATIBLE WITH FLUORESCENT LAMPS (VA) No	COMPATIBLE WITH MOTORS (VA) No
NUMBER OF CONTROLLABLE CIRCUITS 1	FREQUENCY 50 Hz	OPERATING TEMPERATURE RANGE (°C) 0 - 40 °C
COMPATIBLE WITH HALOGENS WITH ELECTROMAGNETIC TRANSFORMER (W) 700 W	INDICATOR FUNCTION No	POWER SUPPLY (V~) 230 V~
COMPATIBLE WITH ELECTRONIC AUXILIARY No	IP RATING IP20	STORAGE TEMPERATURE RANGE (°C) 20 - 75 °C
COMPATIBLE WITH HALOGENS WITH ELECTRONIC TRANSFORMER (W) No	COMPATIBLE WITH LOW CONSUMPTION (W) No	TYPE Dimmer / 2-way switch
	MAXIMUM POWER (W) 1000	VERSION Single
NUMBER OF POSSIBLE ELEMENTS 1 element	MAXIMUM QUANTITY PER CIRCUIT 1	NUMBER OF WIRES 2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 6	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27		

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053032985

PRODUCT NET WEIGHT

0.22

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

329232

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053032985

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.225

UNITARY PACKAGING VOLUME

329232

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

0.22

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS

WEIGHT

0.22

PACKAGING LENGTH

76