
Keypad 4 DALI-2 S270 Aluminio

REF. **89000160-093**

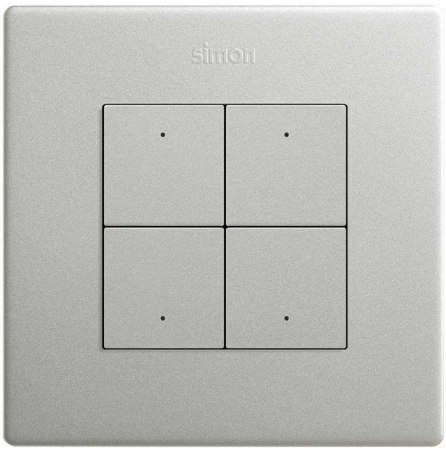

BASIC INFORMATION

DESCRIPTION

DALI-2 four-button keypad. The keypad is powered via the DALI bus, drawing a typical current of 5 mA and a maximum current of 25 mA. It is installed in a flush-mounted box for mechanisms, on a Simon S|270 frame. The keypad is pre-configured to operate without needing to be addressed. Once addressed, it allows configuring the type of press (single, double or long) via the DALI-2 controller. It has an LED indicator on each button. Operating temperature range is 0 – 40 ºC and maximum relative humidity is 90%. Dimensions: 49 x 45 x 45 mm. IP 20 protection rating. Aluminium finish.

FINISH

Aluminium

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

TECHNICAL INFORMATION

IP RATING
IP20

POWER SUPPLY (V~)
DALI bus (12 Vdc – 20,5 Vdc)

CONTROL
DALI2

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053323205

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0

PRODUCT NET WEIGHT
0.051

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053323205

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
80

PACKAGING WIDTH
55

PACKAGING LENGTH
55

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
242000

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.077

PACKAGING NET WEIGHT
0.051

PACKAGING WEIGHT UNIT
KGM