


Flush-mount wall box base for 4 double elements white Simon 500 Cima

REF. 51050004-030

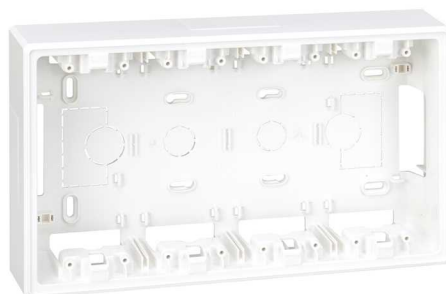

BASIC INFORMATION

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using specific adaptors), combinable with the Simon Trunking range

PACKAGING CONTENTS

Surface-mount box base, fixing studs, screws, installation manual

ETIM CLASS

EC002328

REMARKS

Alternatively, you can screw the frame holders into the box base if you need additional fastening.

TECHNICAL INFORMATION

AVAILABLE MARKET CE

AVAILABLE IN

2, 3 and 4 dual elements

NUMBER OF CLAMP-HOLDER HOLES

16

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING

Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

NUMBER OF ENCLOSURES FOR GROUND CONNECTION

2

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

IK CLASSIFICATION

07

INSULATION RESISTANCE (V-MΩ)

>5MΩ at 500V

IP RATING

IP4X

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

8

NUMBER OF PRE-PUNCHED HOLES 30 X 50 MM

2

NUMBER OF PRE-PUNCHED HOLES 40 X 80 MM

0

RAL

9003

NUMBER OF SIDE ENTRANCES

5

VERSION

4 double elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS

Only with tool

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING

Using the screws supplied

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface-mount wall installation

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60670-1:2005 + IEC 60884-1 Ed 3.2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101254

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.465

PRODUCT NET WEIGHT

0.465

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101254

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

75

PACKAGING WIDTH

165

PACKAGING LENGTH

290

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3.589

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.465

PACKAGING WEIGHT UNIT

KGM

