


Framework for 4 elements in adjustable floor box graphite Simon 500 Cima

REF. 52051802-038

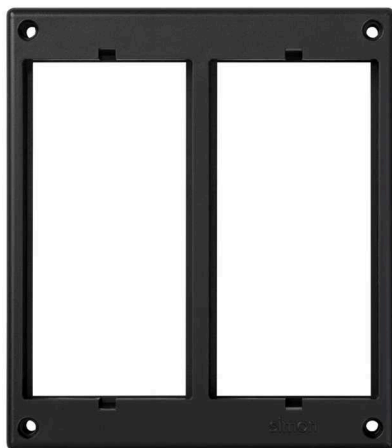

BASIC INFORMATION

DESCRIPTION

With this framework in adjustable floor box and finished in graphite of the Simon 500 Cima series obtained the highest workplace solutions in your workplace, as well as the maximum security, being made of thermoplastic completely halogen-free, which guarantees no flame propagation in case of fire and the low toxicity in case of smoke. It has 4 elements and 4 modules and its dimensions are 132 x 116 x 16 millimetres. The adjustable floor boxes include the framework in white finish is recommended, in this case to combine this product with the adjustable floor boxes in graphite finish, suitable for concrete floor and raised floor through the adjustable floor boxes. Performance, security, durability, but also design. Simon always thinks of covering any type of requiring demanding the highest quality in each of the products that launched on the market.

FINISH

Graphite

COMPATIBILITY

Simon 500 Cima and Simon 27
Play/Simon K45 mechanisms
(using a specific adaptor)

PACKAGING CONTENTS

Framework

MATERIAL

Plastic

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework in a white finish. It is recommended to combine this product with the graphite-finish adjustable floor boxes.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

HEAT RESISTANCE (°C)

+125°C (according rule IEC
60695-10-2)

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2, 4, 6 and 8 elements

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

NUMBER OF MODULES

4 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V
at 50 Hz for 1 minute

KIT AVAILABILITY

No

RAL

7021

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

MAINTENANCE

Clean with a soft, dry cloth. Do
not use abrasive cloths or
cleaning products that contain
chlorine.

VERSION

4 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS

Only with tool

TYPE OF FASTENING

Using screws

INSTALLATION DIRECTION

Horizontal, Vertical

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME

Only with tool

INSTALLATION TYPE

In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053254837

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.049

PRODUCT NET WEIGHT

0.049

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053093276

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

112

PACKAGING WIDTH

117

PACKAGING LENGTH

269

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3769392

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.49

PACKAGING NET WEIGHT

0.49

PACKAGING WEIGHT UNIT

KGM

