


Intermediate switch 10AX 250V~ with fast terminal connection system

REF. 75251-39

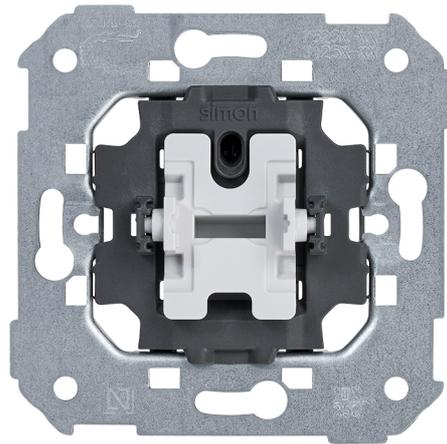

BASIC INFORMATION

DESCRIPTION

The mechanisms of the Simon 75 series, it offers us a system of crossing consists of a single element in an individual version. Its reference is the 75251-39. With a current of 10A and a voltage of 250V~ It features a quick terminal connection and a rocker operation. The installation can be perform in any universal recessed box or on the surface-mounted. It is manufactured with several coated metal components with a halogen-free halogen-free thermoplastic. There is the possibility of implementing the signaling function via cradle blinking and rocker with viewer. The cross-cable section is between 1.5 and 2.5mm and the stripping of wire necessary of 11mm.

MATERIAL

Plastic,Metal

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer.

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 4	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY (HZ) 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 4
CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS


Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION


UNITARY EAN CODE 8421053255926	UNITARY PACKAGING GROSS WEIGHT 0.061	PACKAGING LENGTH 221
UNITARY PACKAGING HEIGHT 0	PRODUCT NET WEIGHT 0.061	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING WIDTH 0	UNITARY PACKAGING WEIGHT UNIT KGM	PACKAGING VOLUME 3026595
UNITARY PACKAGING LENGTH 0	PACKAGING EAN 8421053003664	PACKAGING VOLUME UNIT MMQ
UNITARY PACKAGING MEASUREMENT UNIT MMT	UNITS CONTAINED PACKAGING 10	PACKAGING GROSS WEIGHT 0.625
UNITARY PACKAGING VOLUME 0	PACKAGING HEIGHT 83	PACKAGING NET WEIGHT 0.61
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING WIDTH 165	PACKAGING WEIGHT UNIT KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches

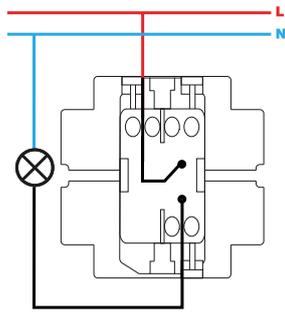


Interruptor unipolar / Single-pole switch
XXXX101-XXX

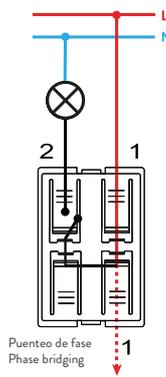


Interruptor unipolar / Single-pole switch
7700101-039

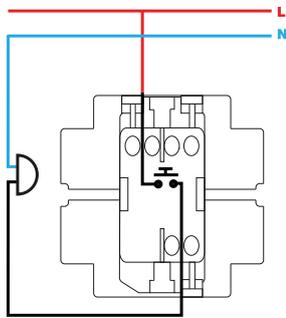


Pulsador / Push button switch
XXXX150-XXX

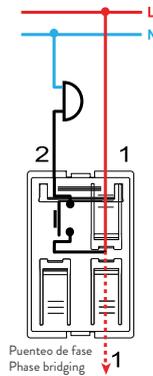


Pulsador / Push button switch
7700150-039

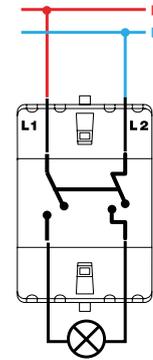


Interruptor bipolar / Double pole switch
XXXX133-XXX

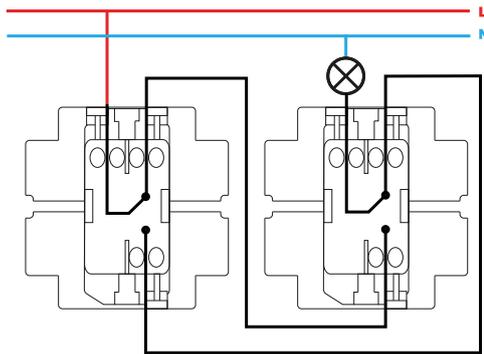


Conmutador / 2-way switch
XXXX201-XXX

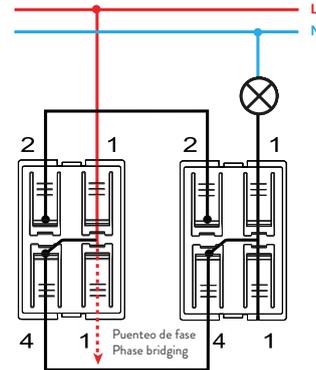


Conmutador / 2-way switch
7700201-039

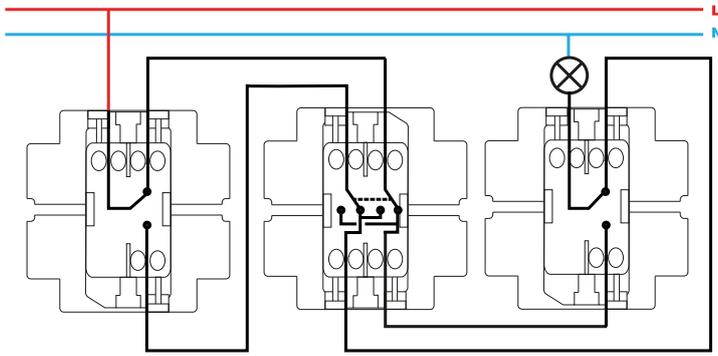


Conmutador cruce / Intermediate switch
XXXX251-XXX

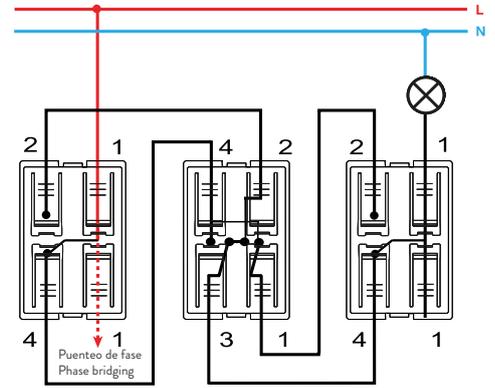


Conmutador cruce / Intermediate switch
7700251-039

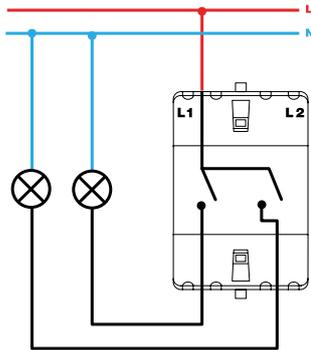


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

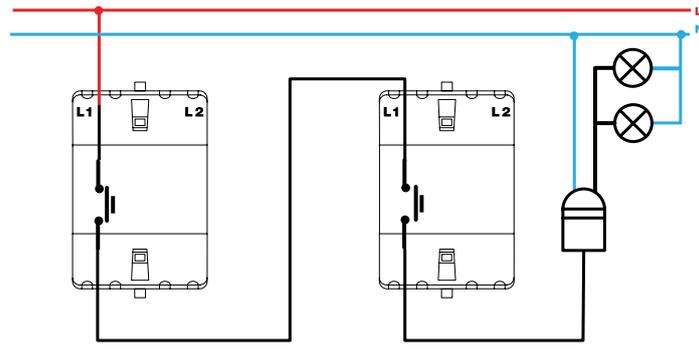


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

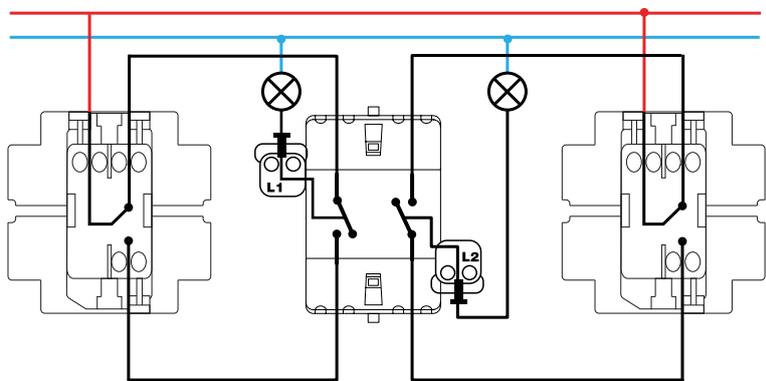


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

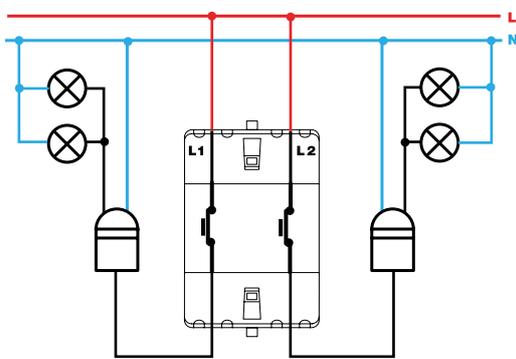


Grupo de pulsadores desconexión / Push button switch disconnection group
XXXX395-XXX

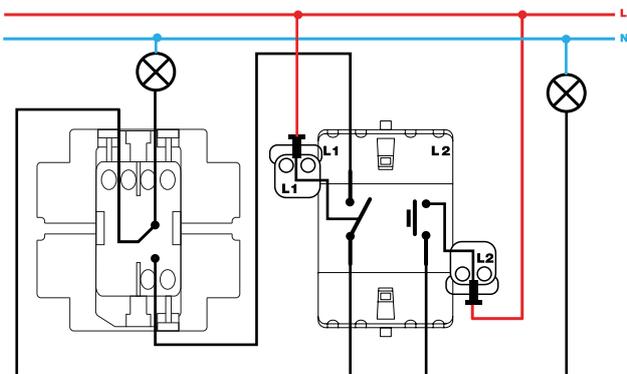


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX

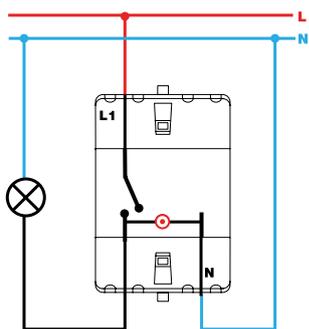


Interruptor unipolar / Single-pole switch
XXXX102-XXX

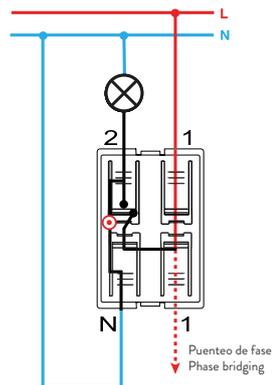


Interruptor con piloto / Push button pilot switch
7700112-039

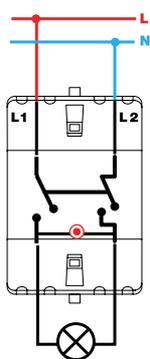


Interruptor bipolar / Double pole switch
XXXX134-XXX

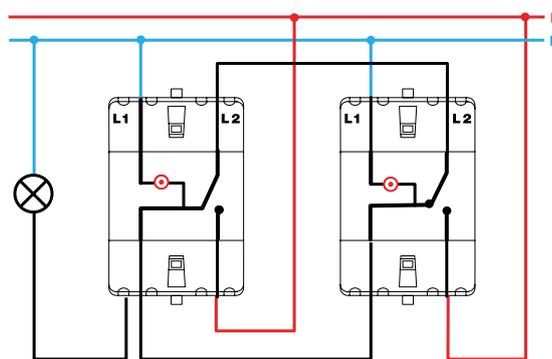


Conmutador / 2-way switch
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX

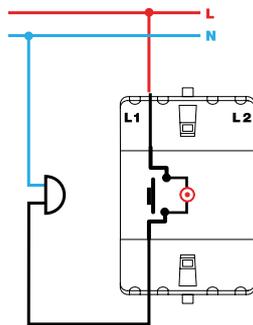


Pulsador con luminoso / Push button switch with light
XXXX160-XXX

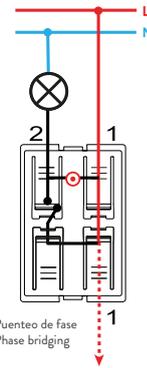

Pulsador con luminoso / Push button switch with light
7700160-039

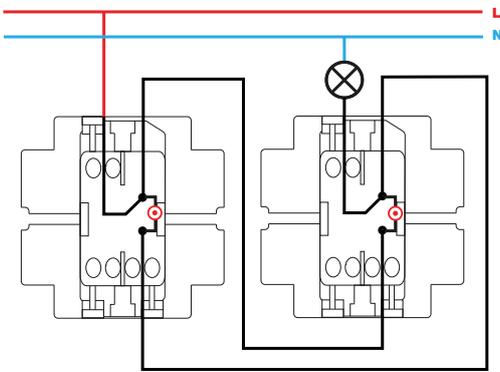

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

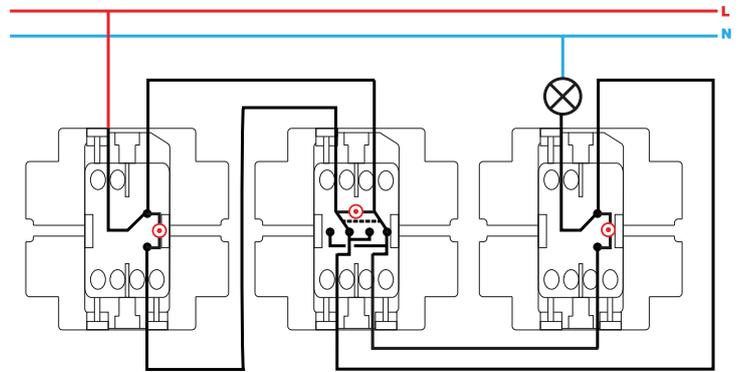

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX