


Horizontal front kit for 2 elements with 1 rocker, 1 USB charger and 1 German socket outlet gloss black Simon 100

REF. 10020206-138

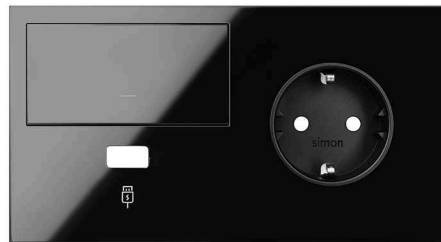

BASIC INFORMATION

DESCRIPTION

This front kit is installed horizontally, it is intended to occupy 2 elements and has 1 key, 1 USB charger and 1 Schuko plug base. It is made in black color and glossy finish, all part of the Simon 100 series.

It is a device that works with a voltage of 230 V, the intensity is 2'1 A for the USB charger, 16 A for the Schuko plug base and 10 AX for the switch. As for the connection it is a screw for the USB and by cutting (1 click).

The product complies with regulations 2014/35 / UE LVD + directive 2014/30 / UE EMC + directive 2011/65 / UE RoHS + EN 50581: 2012 + EN 60669-1: 1999 + EN 60669-1: 1999 A1: 2002 + EN 60669-1: 1999 A2: 2008 * 2 + EN 60950-1: 2006 + EN 60950-1: 2006 A11: 2009 + EN 60950-1: 2006 A1: 2010 + EN 60950-1: 2006 A12: 2011 + EN 60950-1: 2006 A2: 2011 * 3 + ETSI-EN 301489-34 v14.1 * 3 + IEC 60884-1 Ed. 3.2 * 1.

As for its maintenance, it must respect a temperature range of 5 to 40° C for its operation and a temperature range of -25 to 50° C for its storage.

FINISH

Gloss black

COMPATIBILITY

Simon 100 mechanisms kit

MATERIAL

Thermoplastic

ETIM CLASS

EC000007

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

2 elements

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FORMAT

Schuko,USB

MONOBLOCK

Yes

VERSION

2 elements

INDICATOR FUNCTION

No

INSTALLATION AND MAINTENANCE

INSTALLATION DIRECTION

Horizontal

INSTALLATION TYPE

Suitable for flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2: 2008*2 + EN 60950-1:2006 + EN 60950-1:2006 A11:2009 + EN 60950-1:2006 A1:2010 + EN 60950-1:2006 A12:2011 + EN 60950-1:2006 A2:2011*3 + ETSI-EN 301489-34 v14.1*3 + IEC 60884-1 Ed. 3.2*1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053146309

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.094

PRODUCT NET WEIGHT

0.094

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053146309

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

25.3

PACKAGING WIDTH

84

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329406

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.094

PACKAGING NET WEIGHT

0.094

PACKAGING WEIGHT UNIT

KGM