


USB double A+C charger 30W Power Delivery Simon 75

REF. 7511296-039

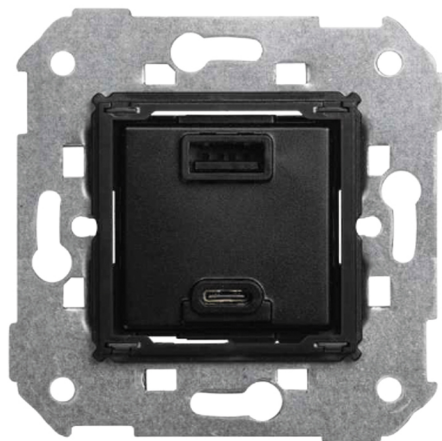

BASIC INFORMATION

DESCRIPTION

The double USB A+C 30W Power Delivery charger Simon 75 is the ideal solution for integrating fast USB charging in residential and tertiary electrical installations. Designed as a flush-mounted single element mechanism, it allows simultaneous charging of mobile devices, smartphones, tablets, and electronic equipment through a USB type A port and a USB type C port with Power Delivery (PD) technology. This flush-mounted USB charger works with a power supply of 127/230 V~ 50-60 Hz and provides a total power of up to 30 W, with output voltages of 5, 9, 12, 15, and 20 Vdc and a maximum current of up to 3.1 A according to the charging profile. It is compatible with Android and iOS devices and optimizes charging time thanks to intelligent power management. Its terminal connection system with screw terminals ensures a safe and professional installation, accommodating conductors from 1.5 to 2.5 mm². With an IP20 protection rating and compliance with LVD, EMC, RoHS, and EN 62368-1 standards, it offers electrical safety and long-term reliability. The USB A+C 30W charger Simon 75 is perfect for homes, offices, hotels, and commercial spaces that require an integrated fast charging USB socket, combining design and energy efficiency.

MATERIAL

Plastic,Metal

COMPATIBILITY

Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING

Bulk

ETIM CLASS

EC002949

REMARKS

These USB C sockets require devices compatible with PD.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS

2

MAXIMUM POWER (W)

30

USB CURRENT (A)

3.0 A

CONNECTOR TYPE

USB A + USB C

MONOBLOCK

Yes

USB PORT TYPE

A,C

FORMAT

USB A + USB C

PLATE TYPE

Flat

POWER DELIVERY USB

Yes

FREQUENCY

50 - 60 Hz

POWER SUPPLY (V~)

127/230 V~

QUICK CHARGE USB

Yes

INDICATOR FUNCTION

No

RECESS DIMENSION (MM)

40

USB VOLTAGE (V~)

5/20 V~

IP RATING

IP20

USB CHARACTERISTICS

USB A+C= 5,0 VDC 3,0 A 15W ;
USB A= 5,0 VDC 3,0 A 15W / 9,0
VDC 3,0 A 27W / 12,0 VDC 2,5 A
30W ; USB C= 5,0 VDC 3,0 A 15W
/ 9,0 VDC 3,0 A 27W / 12,0 VDC
2,5 A 30W / 15,0 VDC 2,0 A 30W /
20,0 VDC 1,5 A 30W

VOLTAGE (V~)

127/230 V~

LINKABLE

Yes

NUMBER OF WIRES

2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

8

REMOVAL OF COVER

Only with tool

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Screw

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL

CONNECTION - FUNCTION 2

USB: Screw

REGULATIONS

WARRANTY

3 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053284278

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.097

PRODUCT NET WEIGHT

0.097

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053284278

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329232

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.097

PACKAGING WEIGHT UNIT

KGM

