
Floor attachment base for oval mini columns with 2 sides stainless steel Simon K45

REF. **RALK006/8**

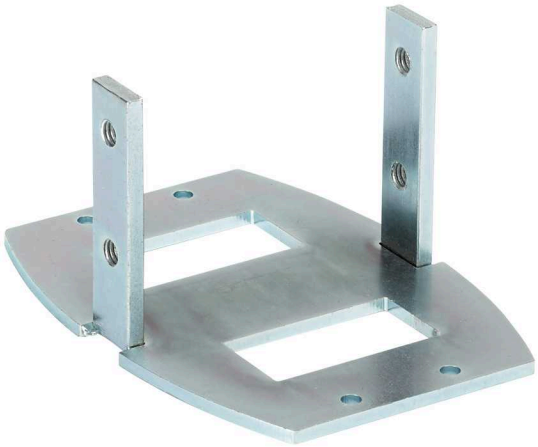

BASIC INFORMATION

DESCRIPTION

Take into a piece the highest quality at the best price is not incompatible. A good example of this is the Base of floor attachment for mini columns of two sides oval in stainless steel of the Simon K45. Each day are more individuals and professionals they bet for their electrical installations for this element suitable for installing on any floor type, whether raised or concrete The stainless steel with which it has been manufactured, this base gives it great resistance to impacts, knocks and with a half of 80 x 110 x 55 mm, this product has been envisaged as a replacement part, in the event of loss or substitution. Thanks to all these features, it is a highly demanded to be installed in large public and private buildings such as the headquarters of offices, educational centres and medical or installations dedicated to perform activities leisure of all types.

FINISH

Metal

MATERIAL

Stainless steel

PACKAGING CONTENTS

Floor attachment base and fastening screws

ETIM CLASS

EC002454

REMARKS

Product envisaged as a replacement part, in the event of loss or substitution.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
1-sided, 2-sided (square and oval) and 4-sided

DIELECTRIC STRENGTH
Without perforation or contournament with 2000 V at 50H during 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+120º C

EARTHING RESISTANCE
< 0.05 ?

HEAT RESISTANCE (ºC)
+650ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
5 MOhms at 500 V.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-25 a 120º C

VERSION
2-sided (Oval)

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING
Using supplied screws

INSTALLATION DIRECTION
Horizontal

INSTALLATION TYPE
Suitable for installing on any floor type, whether raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8426436056473

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.264

PRODUCT NET WEIGHT
0.264

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436056473

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
88

PACKAGING WIDTH
86

PACKAGING LENGTH
130

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.984

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.264

PACKAGING WEIGHT UNIT
KGM