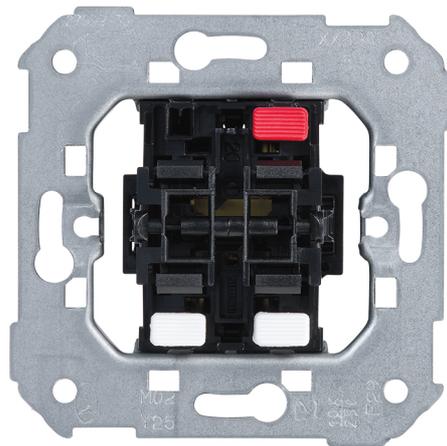# Set of 2 switches 10AX 250V~ with fast terminal connection system

REF. **75398-39**

BASIC INFORMATION

DESCRIPTION

Group of 2 switches 10 AX 250V~ with system fast-terminals connection suitable for surface and flush mounting. This control mechanism of the Simon 75 series has been manufactured in compliance with the regulations and consists of metal parts with halogen-free thermoplastic insulation. This feature makes the device suitable for any environment, as it guarantees maximum security at all times, due to its materials, the device stands out for its resistance to extreme temperatures, although the manufacturer recommends that it be installed in environments whose temperature is between 5 and 40º for a better conservation. The Simon 75 collection offers a wide range of mechanisms for all kinds of decorative spaces. Its parts are available in different finishes, so the combinations are endless. They also consist of very innovative electronic functions capable of responding to the current needs.

COMPATIBILITY
Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS
Mechanism

ETIM CLASS
EC001590

simon

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
3

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY (HZ)
50 Hz

INDICATOR FUNCTION
No

CURRENT (A)
10 AX

IP RATING
IP21

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (ºC)
5 - 40 ºC

STORAGE TEMPERATURE RANGE (ºC)
-25 - 50 ºC

VERSION
Double

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

simon

simon

UNITARY EAN CODE
8421053256046

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.062

PRODUCT NET WEIGHT
0.062

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053003992

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
221

PACKAGING WIDTH
83

PACKAGING LENGTH
165

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
3026595

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.625

PACKAGING NET WEIGHT
0.62

PACKAGING WEIGHT UNIT
KGM

Mecanismos básicos / Basic switches
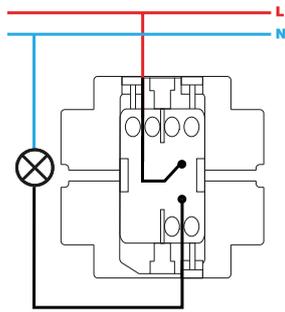
Interruptor unipolar / Single-pole switch
XXXX101-XXX
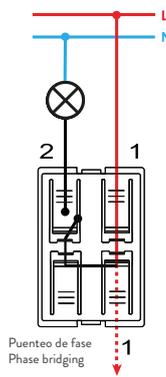
Interruptor unipolar / Single-pole switch
7700101-039
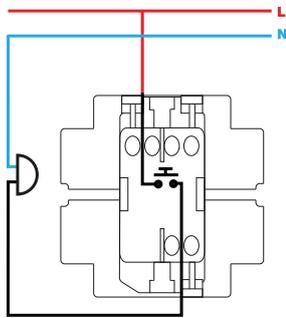
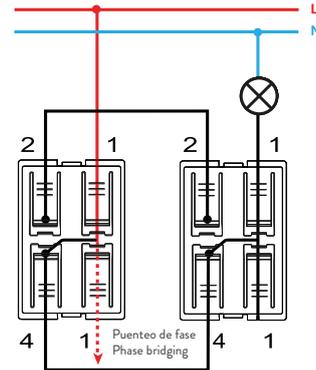Pulsador / Push button switch
XXXX150-XXX
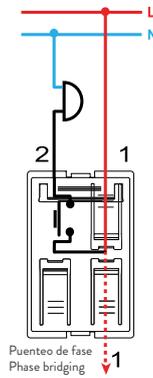
Pulsador / Push button switch
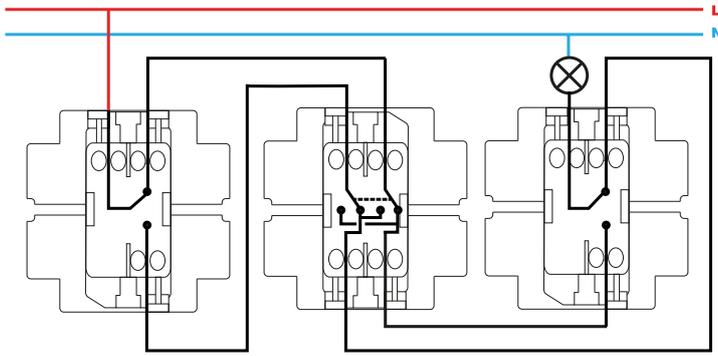7700150-039
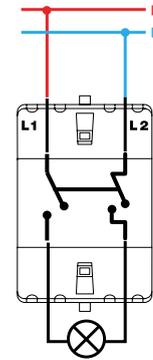
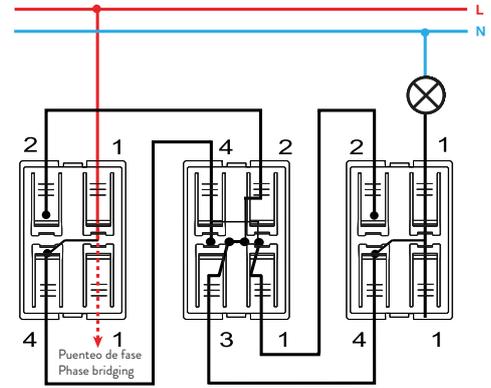Interruptor bipolar / Double pole switch
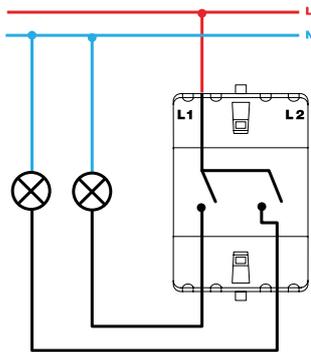XXXX133-XXX
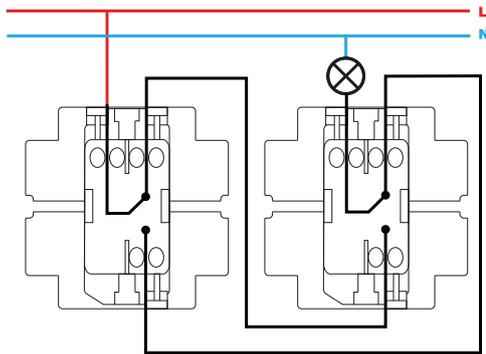
Conmutador / 2-way switch
XXXX201-XXX

Conmutador / 2-way switch
7700201-039

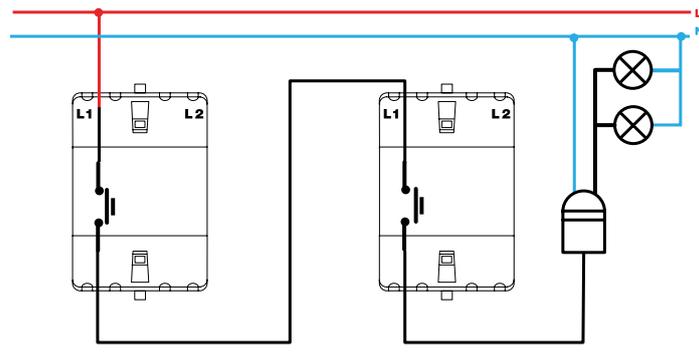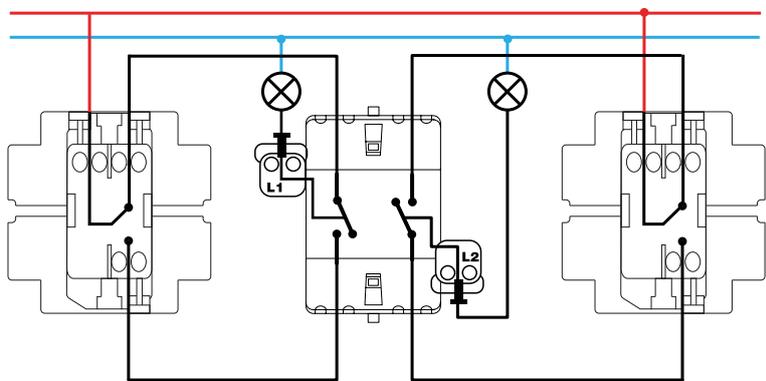Conmutador cruce / Intermediate switch
XXXX251-XXX

Conmutador cruce / Intermediate switch
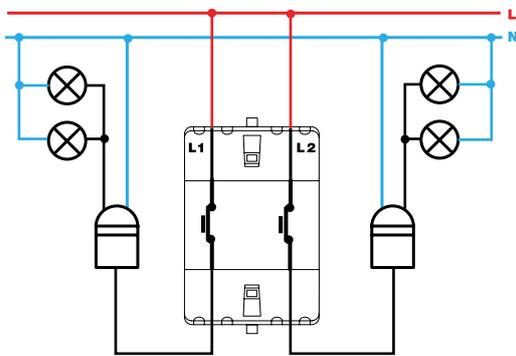7700251-039

Puenteo de fase
Phase bridging

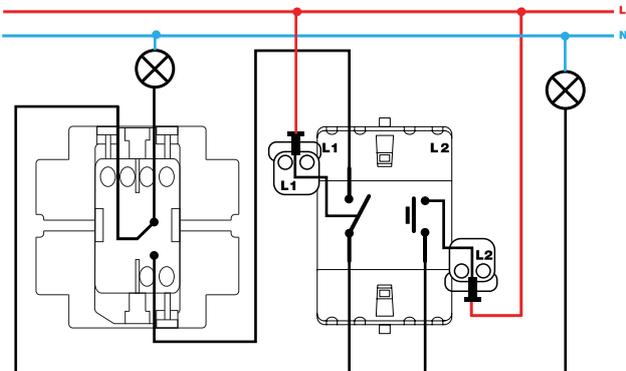Grupo 2 interruptores / 2 switches group
XXXX398-XXX

Pulsador desconexión / Push button desconexion switch
XXXX152-XXX

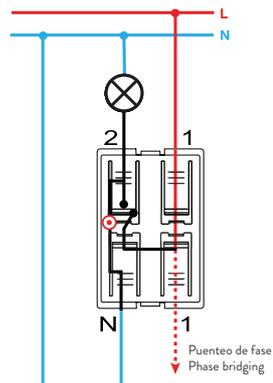

Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

Grupo de pulsadores desconexión / Push button switch
desconexion group XXXX395-XXX

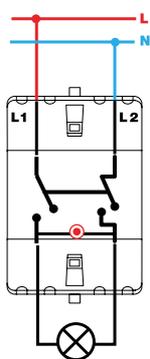
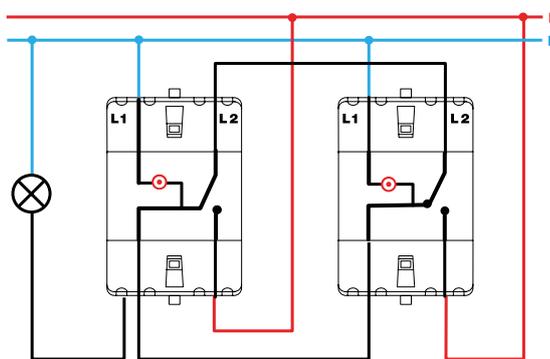Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX

Interruptor unipolar / Single-pole switch
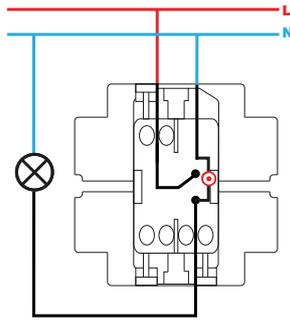XXXX102-XXX

Puenteo de fase
Phase bridging
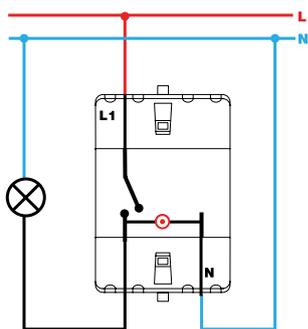
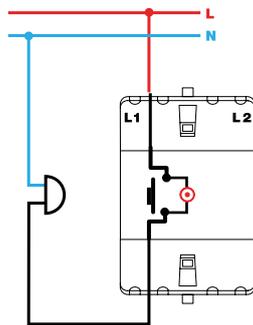Interruptor con piloto / Push button pilot switch
7700112-039

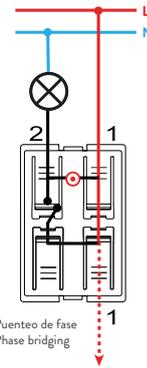Interruptor bipolar / Double pole switch
XXXX134-XXX
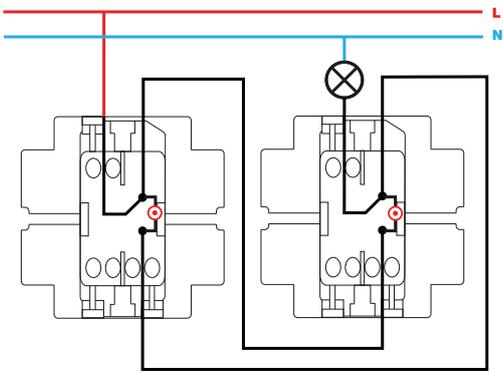

Conmutador / 2-way switch
XXXX202-XXX

Interruptor unipolar con luminoso / Single-pole switch with light
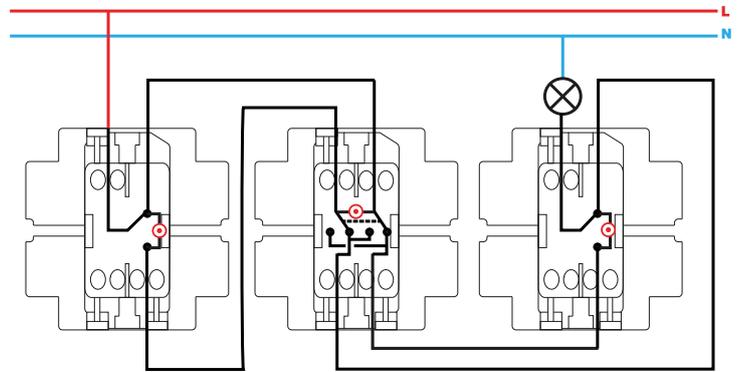XXXX104-XXX

Pulsador con luminoso / Push button switch with light
XXXX160-XXX

Pulsador con luminoso / Push button switch with light
7700160-039

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX