


## 2-way switch 10AX 250V~ with 1click® terminal connection system

REF. 7700201-039

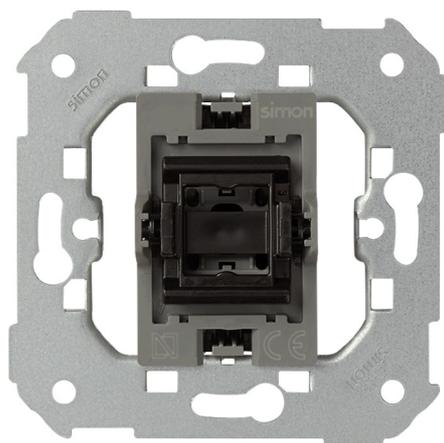

### BASIC INFORMATION

#### DESCRIPTION

This 2-way switch for currents of up to 10A of intensity and 250 volts is part of the Simon 77 series. The product responds to the latest technology and stands out for its easy clamping by cutting (1 click). Simon products not only stand out for their high functionality and modernity appearance, but also for its versatility. In this sense, the 2-way switch offers the possibility of implementing the signaling function, by means of a rocker with viewer and a signaling bracket. All products in the Simon brand, which seeks to always offer the user with the greatest combination possibilities. The installation system of the 2-way switch is also simple and can be done directly on the surface-mounted or by recessing. Moreover, its rocker operation makes it very interactive. It is made of metal components with halogen-free insulation and thermoplastic trim are. All ensures a long service life to the final set, you will be able to continue to work normally under extreme temperatures ranging from -25 to 50 degrees centigrade.

#### COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

#### PACKAGING CONTENTS

Mechanism and instructions

#### ETIM CLASS

EC001590

#### REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer.

## TECHNICAL INFORMATION

<b>CABLE SECTION ADMITTED (MM)</b> From 1,5 to 2,5 mm	<b>TYPE OF MECHANISM</b> Pivoting	<b>STORAGE TEMPERATURE RANGE (°C)</b> -25 - 50 °C
<b>NUMBER OF POSSIBLE ELEMENTS</b> 1 element	<b>OPERATING TEMPERATURE RANGE (°C)</b> 5 - 40 °C	<b>VERSION</b> Single
<b>CURRENT (A)</b> 10 AX		<b>VOLTAGE (V~)</b> 250 V~

## INSTALLATION AND MAINTENANCE

<b>CLAW</b> Simon 27	<b>INSTALLATION TYPE</b> Suitable for surface and flush mounting	<b>TYPE OF TERMINAL CONNECTION - FUNCTION 1</b> 1 click connection (1 click®)
<b>INSTALLABLE IN FLUSH MOUNT JUNCTION BOX</b> Universal		

## REGULATIONS

### REGULATIONS


Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008 + EN 60998-2-3:2004

## LOGISTICS INFORMATION


UNITARY EAN CODE	UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH
8421053256480	0.062	221
UNITARY PACKAGING HEIGHT	PRODUCT NET WEIGHT	PACKAGING MEASUREMENT UNIT
0	0.062	MMT
UNITARY PACKAGING WIDTH	UNITARY PACKAGING WEIGHT UNIT	PACKAGING VOLUME
0	KGM	3.027
UNITARY PACKAGING LENGTH	PACKAGING EAN	PACKAGING VOLUME UNIT
0	8421053075807	DMQ
UNITARY PACKAGING MEASUREMENT UNIT	UNITS CONTAINED PACKAGING	PACKAGING GROSS WEIGHT
MMT	10	0.63
UNITARY PACKAGING VOLUME	PACKAGING HEIGHT	PACKAGING NET WEIGHT
0	83	0.62
UNITARY PACKAGING VOLUME UNIT	PACKAGING WIDTH	PACKAGING WEIGHT UNIT
MMQ	165	KGM

# MECANISMOS SIMON 31, 75, 77, 82 Y 88


## Mecanismos básicos / Basic switches

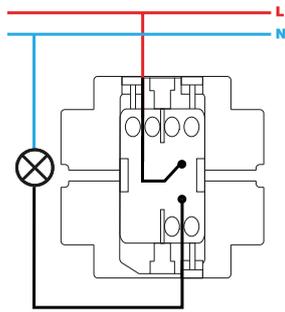


Interrupor unipolar / Single-pole switch  
XXXX101-XXX

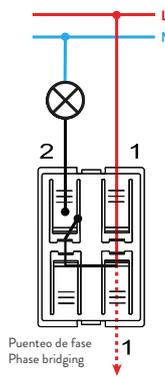


Interrupor unipolar / Single-pole switch  
7700101-039

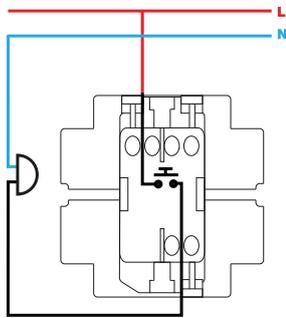


Pulsador / Push button switch  
XXXX150-XXX

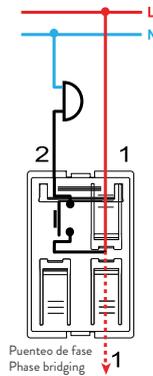


Pulsador / Push button switch  
7700150-039

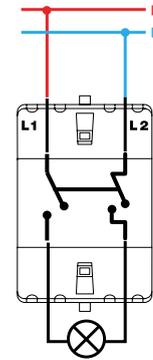


Interrupor bipolar / Double pole switch  
XXXX133-XXX

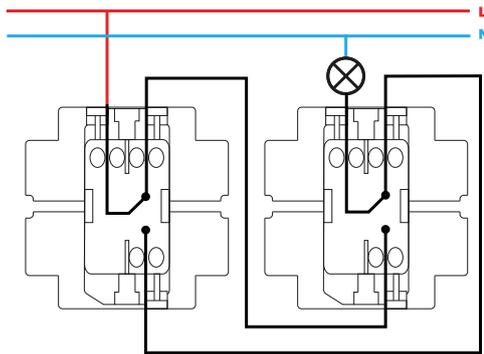


Conmutador / 2-way switch  
XXXX201-XXX

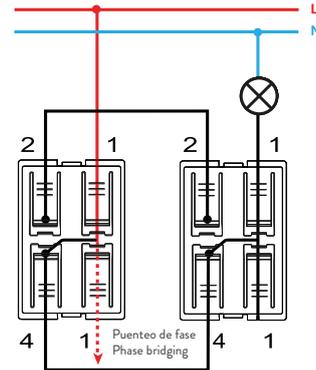


Conmutador / 2-way switch  
7700201-039

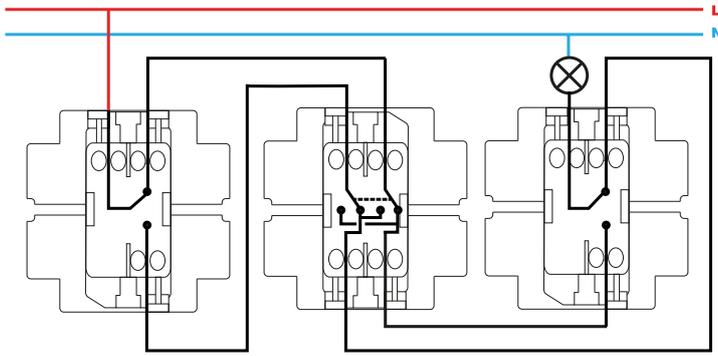


Conmutador cruce / Intermediate switch  
XXXX251-XXX

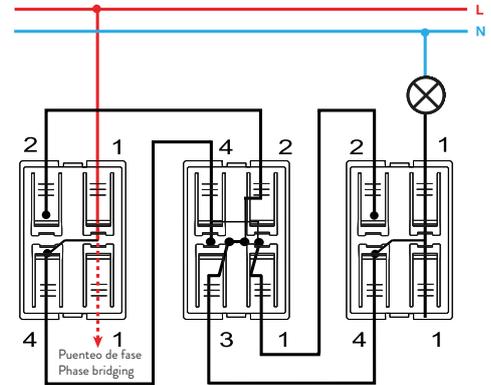


Conmutador cruce / Intermediate switch  
7700251-039

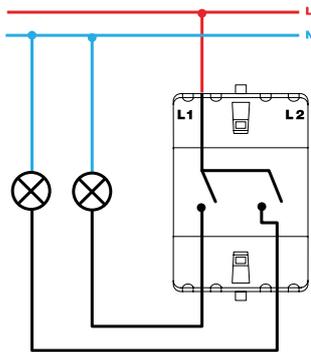


Grupo 2 interruptores / 2 switches group  
XXXX398-XXX

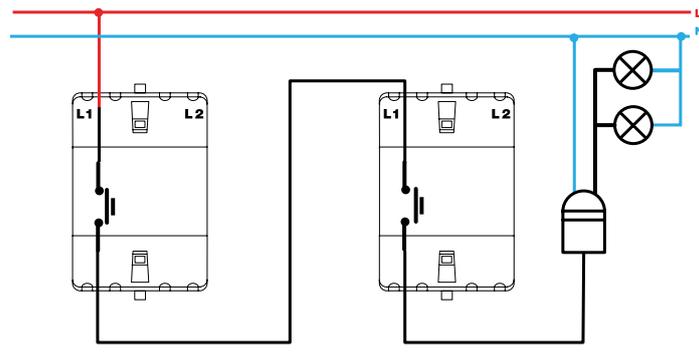


Pulsador desconexión / Push button disconnection switch  
XXXX152-XXX

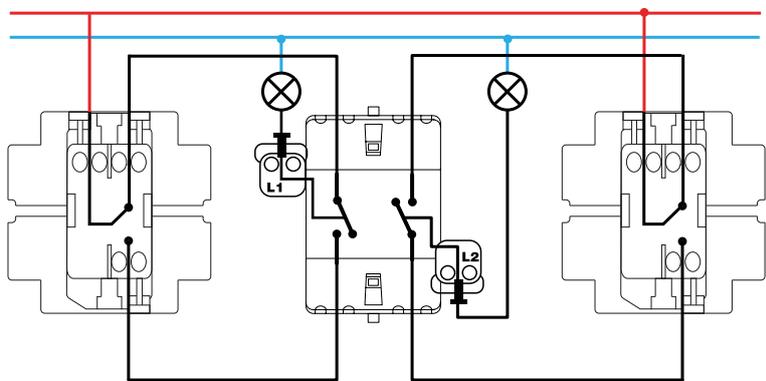


Grupo dos conmutadores / 2-way switches group  
XXXX397-XXX

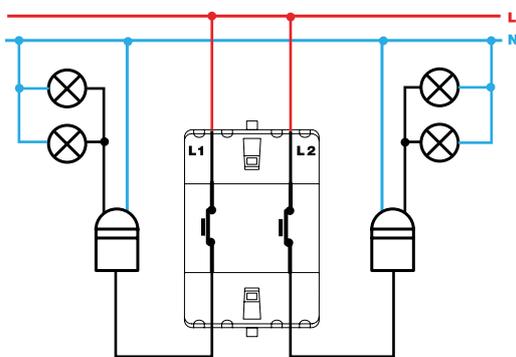


Grupo de pulsadores desconexión / Push button switch disconnection group  
XXXX395-XXX

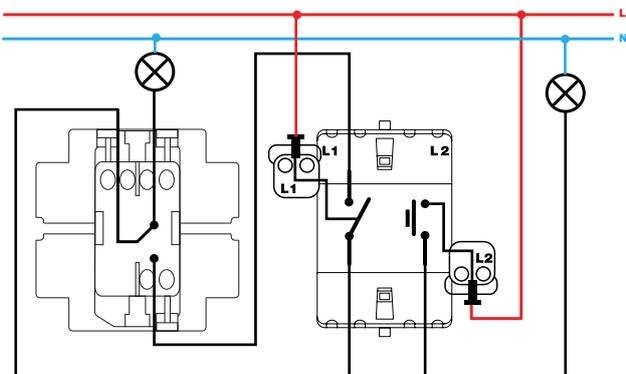


Grupo conmutador y pulsador / 2-way and push button switch group  
XXXX301-XXX




Interruptor unipolar / Single-pole switch  
XXXX102-XXX

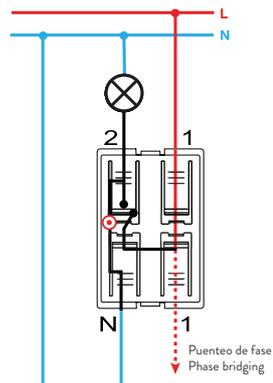


Interruptor con piloto / Push button pilot switch  
7700112-039

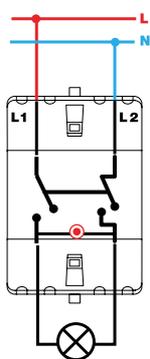


Interruptor bipolar / Double pole switch  
XXXX134-XXX

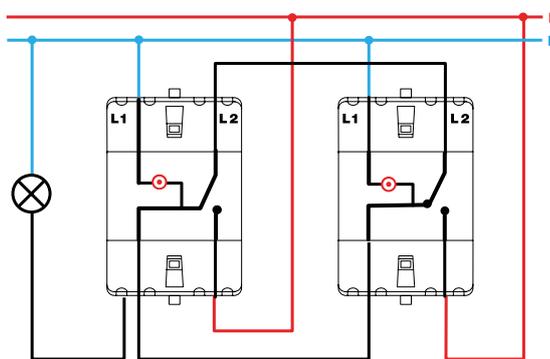


Conmutador / 2-way switch  
XXXX202-XXX

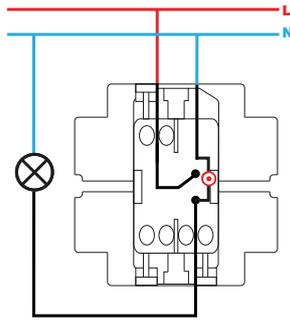


Interrupor unipolar con luminoso / Single-pole switch with light  
XXXX104-XXX




Pulsador con luminoso / Push button switch with light  
XXXX160-XXX

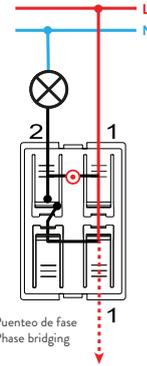

Pulsador con luminoso / Push button switch with light  
7700160-039

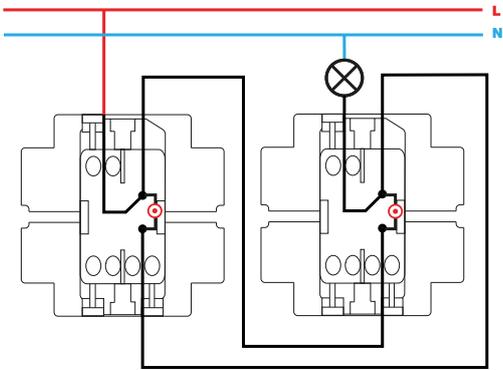

Conmutador con luminoso / 2-way switch with light  
XXXX204-XXX

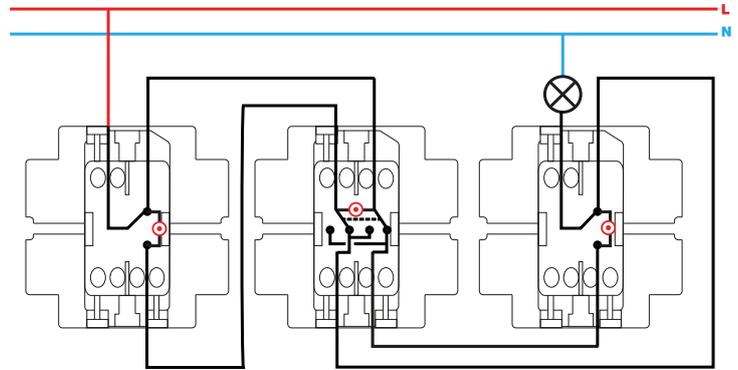

Conmutador cruce con luminoso / Intermediate switch with light  
XXXX254-XXX