Service cover for 12 elements for installation in concrete floor or raised floor graphite Simon 500 Cima

REF. **52054106-038**



BASIC INFORMATION

DESCRIPTION

The adjustable floor box to 12 elements in raised floor installation form part of the collection Simon 500 Cima. With dimensions of 225x310x92 mm and a versatile finished in grey colour, the piece is manufactured with metal components with thermoplastic insulation coated self-extinguishing halogen-free to ensure that is no flame spread in case of fire, along with a very low toxicity if had any smoke. Once the product has been configured and installed, as an option, it can be combined with the flush-mount trim cover (ref.52053106-035) in cases where you do not install the same floor covering. Simon ' s commitment by offering a constant innovation in its products are materialize in its 500 Cima collection, a collection that brings together all kinds of solutions for those who do not wish to renouncing the best mechanisms on the market, without renouncing the security and guarantee of our brand.

FINISH

Graphite

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

MATERIAL

Plastic

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053106-038) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
12 modules

RAL
7021

RECESS DIMENSION (MM)
210 x 300 mm

VERSION
12 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica y metálica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053101674

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.745

PRODUCT NET WEIGHT
1.745

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101674

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
79

PACKAGING WIDTH
236

PACKAGING LENGTH
342

PACKAGING MEASUREMENT UNIT
MMT

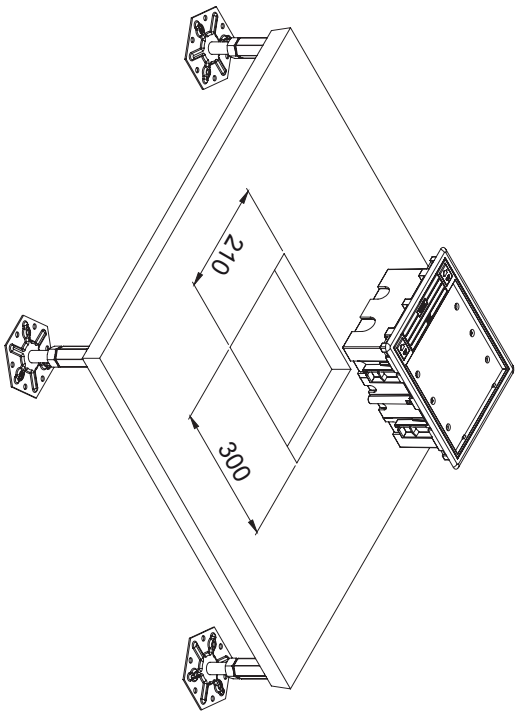
PACKAGING VOLUME
6.376

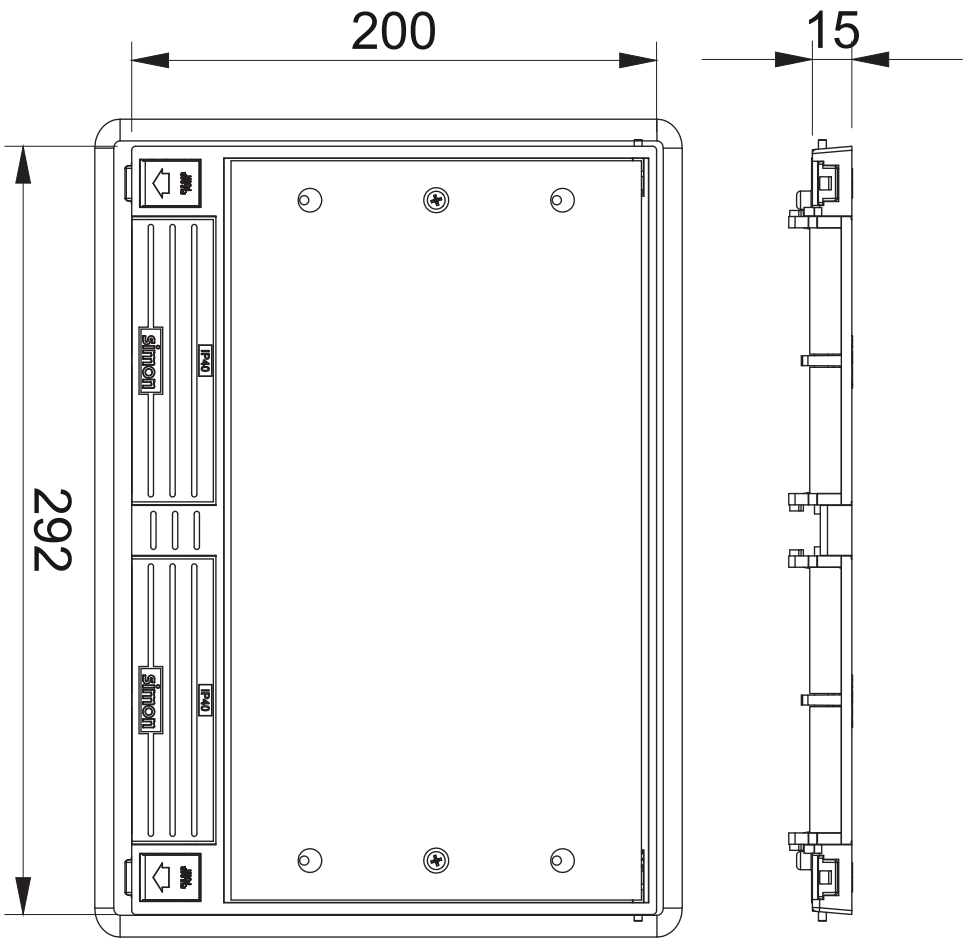
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.745

PACKAGING WEIGHT UNIT
KGM


210
300


200
15
292
simon
IP40
simon
IP40