


Push-button switch 10A 24V~ with built-in red LED and fast terminal connection system

REF. 75552-39

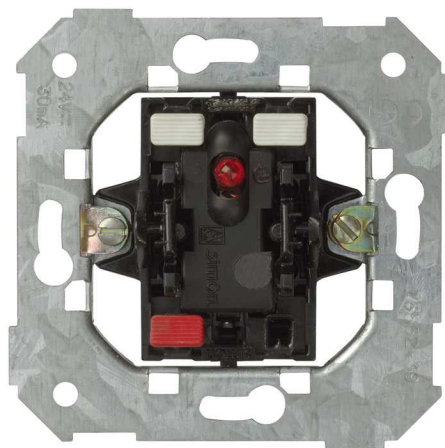

BASIC INFORMATION

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature and Simon 82
frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	CURRENT (A) 10 A	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
CONSUMPTION INDICATOR (MA) 1 mA	IP RATING IP20	VERSION Single
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 24 V~
INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C	

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION Por inserción	CLAW Simon 27	INSTALLATION TYPE Suitable for surface and flush mounting
CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING GROSS
WEIGHT

0.073

UNITARY PACKAGING WEIGHT
UNIT

KGM

UNITS CONTAINED PACKAGING
10

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING LENGTH
0

PACKAGING EAN
8421053029336

PACKAGING VOLUME
3017190

PRODUCT NET WEIGHT
0.073

PACKAGING GROSS WEIGHT
0.725

PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING VOLUME
3017190

PACKAGING HEIGHT
82

PACKAGING WEIGHT UNIT
KGM

UNITARY PACKAGING VOLUME
UNIT
MMQ

PACKAGING LENGTH
223

PACKAGING WIDTH
165

PACKAGING NET WEIGHT
0.73