VGA HD15 connector + minijack white Simon 270

REF. **20000091-090**

BASIC INFORMATION

FINISH
White

MATERIAL
Plastic

COMPATIBILITY
Simon 270 frames

PACKAGING CONTENTS
VGA connector + minijack, cover and instruction sheet

ETIM CLASS
EC002906

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

REVISION
2.0

CONNECTOR TYPE
VGA + Mini-Jack

NUMBER OF POSSIBLE ELEMENTS
1 element

FORMAT
VGA + Mini-Jack

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Insertion

OPERATING TEMPERATURE RANGE (ºC)
5 - 45 ºC

STORAGE TEMPERATURE RANGE (ºC)
-25 - 50 ºC

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION DIRECTION
Horizontal

INSTALLATION TYPE
Suitable for flush mounting

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053264621

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.068

PRODUCT NET WEIGHT
0.068

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053264621

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
80

PACKAGING WIDTH
55

PACKAGING LENGTH
55

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
242000

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.068

PACKAGING WEIGHT UNIT
KGM

VGA

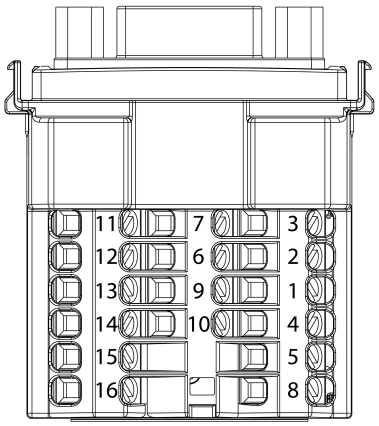

Nº Pin	Descripción
11	ID Bit 0 (Gnd)
12	ID Bit 1 (SDA)
13	HSYNC
14	VSYNC
15	ID Bit 3 (SCL)
16	

Nº Pin	Descripción
7	Gnd Green
6	Gnd Red
9	Key (N/C)
10	Gnd (VSYNC)

Nº Pin	Descripción
3	Blue Coax
2	Green Coax
1	Red Coax
4	ID Bit 2
5	Gnd (HSYNC)
8	Gnd Blue

MINI-JACK

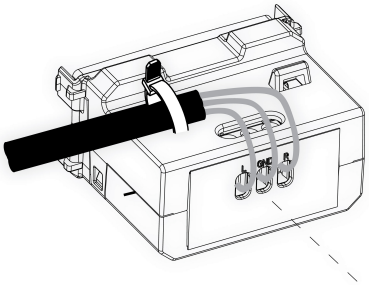

L - Izquierda
GND - ⏚
R - Derecha